


PRODUCT SPECIFICATIONS


Model	(IF15/S)
Dimensions	15"W x 13 1/2"H x 21"D
Weight	30 lbs
Electrical Supply	3-wire, 240/208 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Conduit Length	4 Feet
Power Cord Length	6 Feet

ELECTRICAL




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS



STANDARD INSTALLATION



COUNTERTOP CUT-OUT

30" (762)

12³/8"


(314)

6"

(152)

DRAIN OUTLET

FRONT VIEW

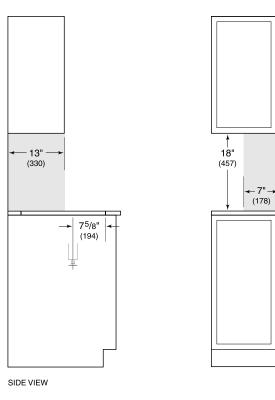

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.




21/2" (64)


PRODUCT SPECIFICATIONS

Model	Cl365T/S	
Dimensions	36"W x 2"H x 21"D	
Weight	61 lb	
Electrical Supply	3-wire, 240/208 VAC, 60 Hz	
Electrical Service	50 amp dedicated circuit	
Conduit Length	4 feet	


ELECTRICAL



DIMENSIONS



STANDARD INSTALLATION

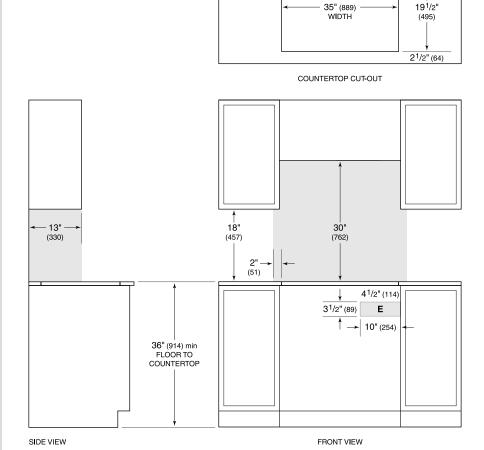

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

Electrical supply location only applies to installations with built-in oven.

T241F900SP

24-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER




FREEDOM® COLLECTION, PANEL-READY

WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

^{*}Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

CUTOUT DIMENSIONS




Furniture return

A: Area for installation of power connection.


B: Area for running the water line. It is recommended that the waterbox is placed adjacent to the installation cavity, so that it can be accessed for service without uninstalling the appliance. If this is not possible, place the recessed waterbox adjacent to the water supply socket elevated at the heights as referenced in areas A and B.

C: Recess depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel.


Stainless steel models contain a panel-ready base unit, ready-to-install stainless steel door(s) with a right or left door swing and handle(s).



TOP VIEW CLEARANCE

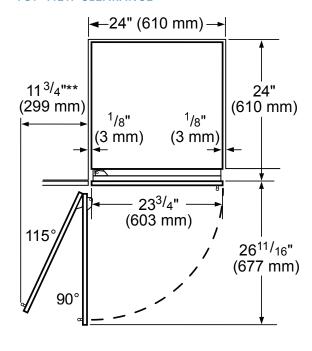

- ** Door handle must be added to this dimension
- Depends on the thickness of the furniture door.
 3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).




Page 2 of 3 3 / 20

T241F900SP 24-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER



FREEDOM® COLLECTION, PANEL-READY

PRODUCT AND PANEL DIMENSIONS

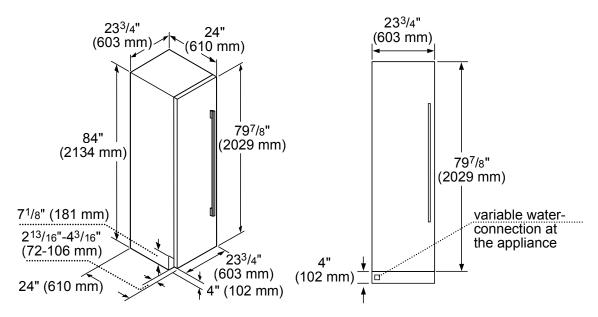

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS

24-Inch Flat Stainless Steel Door Panel Without Dispenser



TFL24IR800 For use with Handle TFL24IR905* Handleless

*Available Summer 2019

NOTE: Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

HANDLES

Choose between two options:

PR36HNDL20
36-Inch Professional Series Handle
or
MS36HNDL20
36-Inch Masterpiece® Series Handle

FILTERS



REPLFLTR10 Freedom® Water Filter Replacement water filter for use in all freezer and

bottom freezer models




SCRNFLTR10

By-Pass Filter for use with existing in-home water filtration systems in all freezers and bottom freezer models

STORAGE



ICEBUCKETL Large Ice Bucket



HEATRKIT20 - 13W @ 120V

Freedom® Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

 $1\,800\,735\,4328 \mid USA\,THERMADOR.COM\mid CANADA\,THERMADOR.CA\mid @2020\,BSH\,HOME\,APPLIANCES\,CORPORATION.\,ALL\,RIGHTS\,RESERVED.$


Page 3 of 3 3 / 20



WARRANTY		
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year	
Limited Warranty for Sealed Refrigeration System**; Parts and Labor	3rd to 6th Year	
Limited Warranty for Sealed Refrigeration System**; Parts Only	7th to 12th Year	
Limited Warranty for Stainless Steel Rust-Through	Lifetime	

 $^{{\}tt **Sealed}\ {\tt refrigeration}\ {\tt system}\ {\tt includes}\ {\tt compressor},\ {\tt evaporator},\ {\tt condenser},\ {\tt dryer}\ {\tt /}\ {\tt strainer}\ {\tt and}\ {\tt connection}\ {\tt tubing}$

CUTOUT DIMENSIONS




Furniture return


A: Area for installation of power connection.

B: Recess depth depends on kitchen design.

TOP VIEW CLEARANCE



- ** Door handle must be added to this dimension
- * Depends on the thickness of the furniture door. 3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).



Page 2 of 3 11 / 18


T301R900SP

30-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY



PRODUCT AND PANEL DIMENSIONS

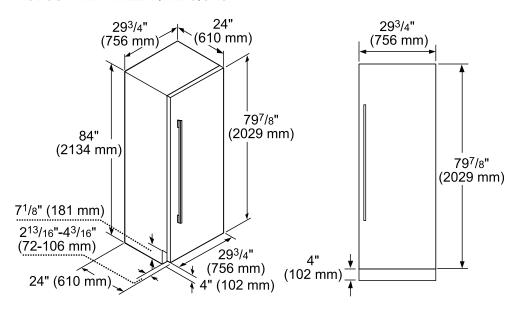

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS



TFL30IR800 30-Inch Flat Stainless Steel Door Panel

NOTE: Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

STORAGE



SPRODBIN10 Small Produce Bin



LPRODBIN10 Large Produce Bin



30PRODRAIL 30-Inch Produce Railing



30HFGALBIN 30-Inch Half Gallon Bin

HANDLES

NOTE: Choose one handle for each column, choose 2 handles for each 2-door bottom freezer and choose 3 handles for each French Door bottom freezer.

PR36HNDL20

36-Inch Professional Series Handle PR30HNDL20

30-Inch Professional Series Handle

MS36HNDL20

36-Inch Masterpiece® Series Handle MS30HNDL20

30-Inch Masterpiece® Series Handle

AVAILABLE WHILE SUPPLIES LAST:

MS36HNDL10

36-Inch Masterpiece® Series Classic Handle MS30HNDL10

30-Inch Masterpiece® Series Classic Handle

HEATRKIT20 - 13W @ 120V

Freedom® Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.


Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

 $1\,800\,735\,4328 \mid USA\,THERMADOR.COM\mid CANADA\,THERMADOR.CA\mid @2018\,BSH\,HOME\,APPLIANCES\,CORPORATION.\,ALL\,RIGHTS\,RESERVED.DERVICED AND COMMON COMM$

Page 3 of 3 11 / 18




30" Convection Oven - Proud Installation

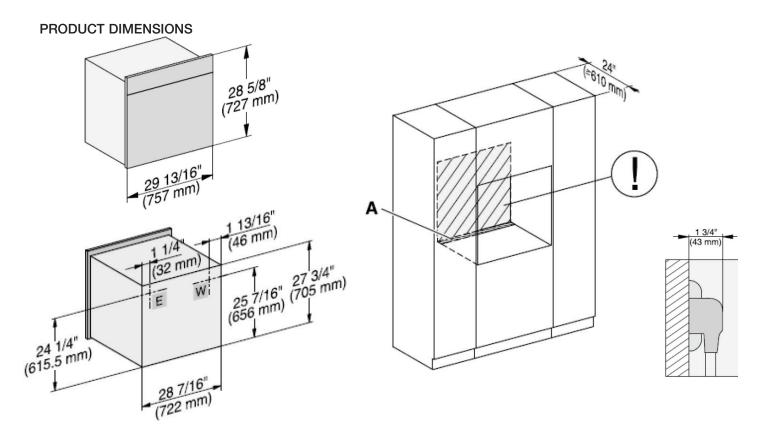

- A Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation
- ①- Electrical and water supplies are recommended to be placed in adjacent cabinetry.

 Additional cabinet depth is required when placing the electrical and water supplies behind the appliance.

E = Electric connection W = Water connection

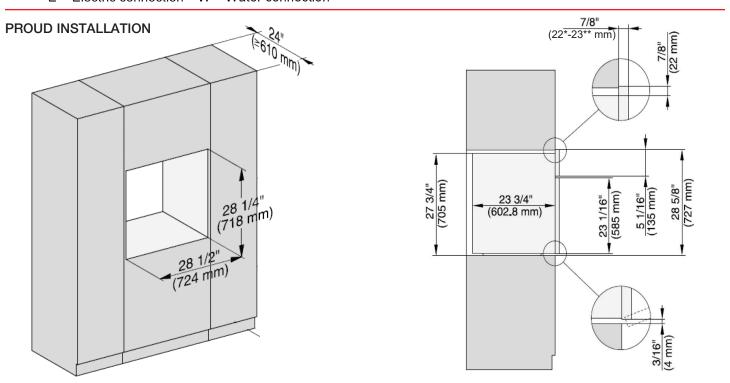


PureLine Plumbed Combi-Steam Oven DGC 6865 XXL BRWS



PRODUCT SPECIFICATIONS

Isometric View

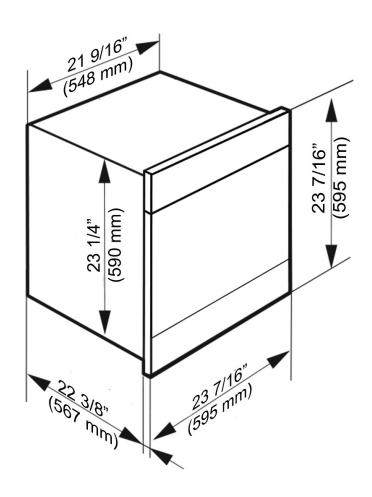


PureLine Plumbed Combi-Steam Oven DGC 6865 XXL BRWS



INSTALLATION SPECIFICATIONS


Door Swing Detail



* Glass front / ** Metal front

Lift Panel Side View

The area in front of the control panel must not be blocked by anything (such as a door handle) that would hinder it from opening and closing.

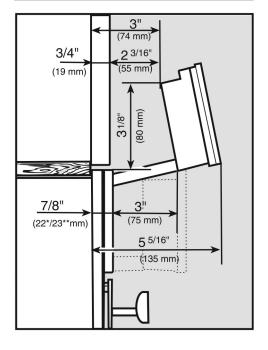


PureLine Plumbed Combi-Steam Oven DGC 6865 XXL BRWS




INSTALLATION SPECIFICATIONS

Tall Cabinet Installation

- 1 Steam oven
- 2 Niche
- 3 Pass-through for the power cord
- 4 Recommended position for electrical outlet
- 5 Power cord, L = 78 3/4" (2,000 mm)
- * Glass front / ** Metal front

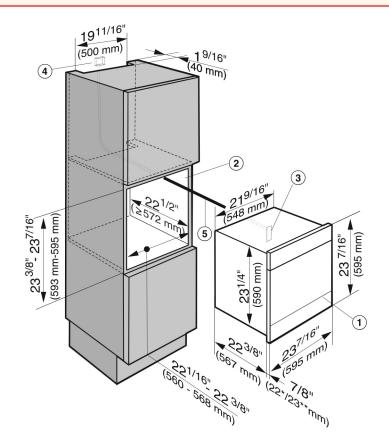

Tall Cabinet Installation — Venting and/or Plumbing Requirements

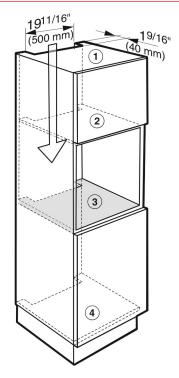


- 1 Cut-out in top of unit (ventilation)
- 2 Cut-out in the interim shelf above the building-in niche (for ventilation)
- 3 Cut-out in the interim shelf below the building-in niche (plumbing)
- 4 Cut-out in unit floor (plumbing)

30" Trim Kit for DGC XXL & 24" Convection Ovens EBA 6768, EBA 6868



Installation Above 30" Oven

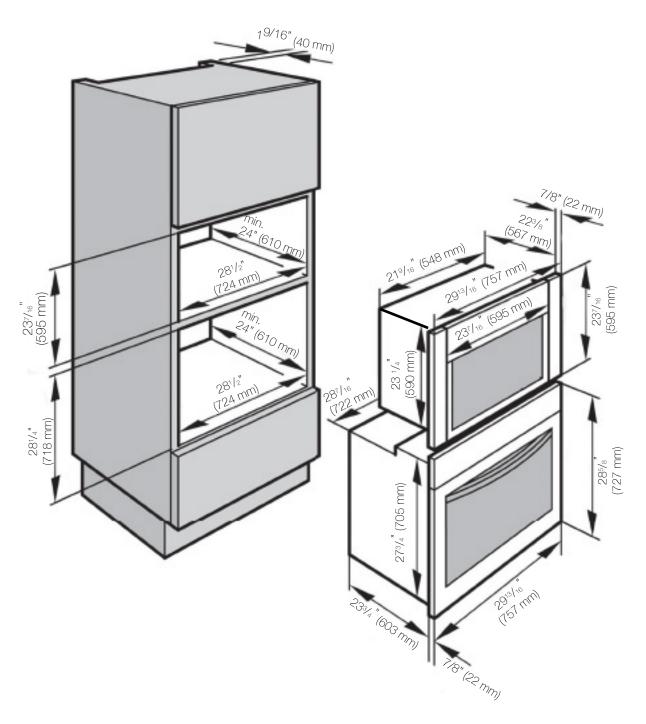


Please follow the appliance's installation instructions for plumbing, electrical, and ventilation requirements.



PRODUCT SPECIFICATIONS


Model	(VS24)
Capacity	0.25 cu. ft.
Weight	76 lbs
Electrical Supply	3-prong grounding-type
Electrical Service	10 amp dedicated circuit
Power Cord Length	3 Feet
Receptacle	3-prong grounding-type


ELECTRICAL




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS



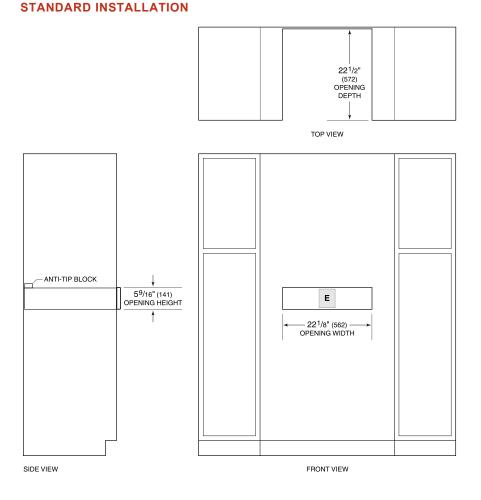



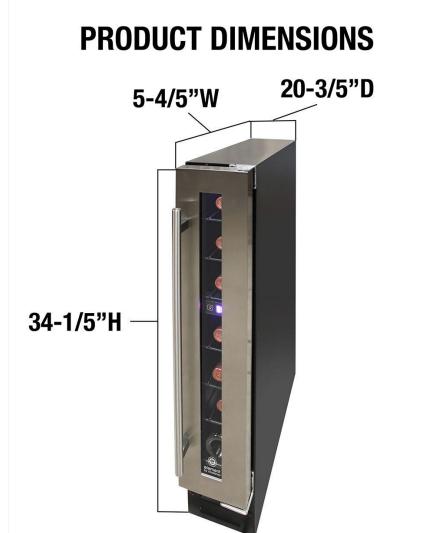



















\$879.00

Shipping: \$125.00

SKU Number: EL-7TSST

New Leaf Extended Warranty (Optional)


No extended warranty


The Website uses cookies. By continuing to use this website, you consent to our use of these cookies. To find out more, see our Cookie Policy (/cookie-policy) and our Privacy Policy (/privacy-policy).



PT





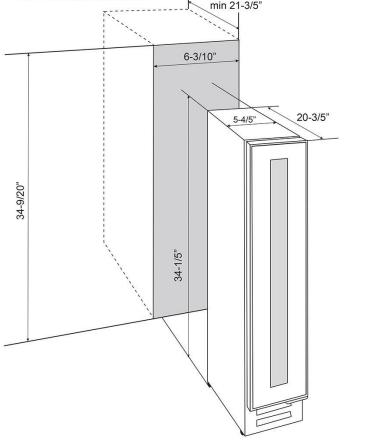

















~



\$879.00

Shipping: \$125.00

SKU Number: EL-7TSST

New Leaf Extended Warranty (Optional)


No extended warranty


The Website uses cookies. By continuing to use this website, you consent to our use of these cookies. To find out more, see our Cookie Policy (/cookie-policy) and our Privacy Policy (/privacy-policy).




PT








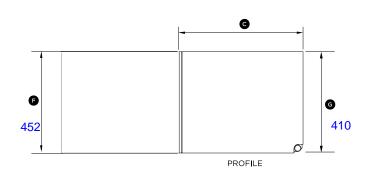

	STANDARD HEIGHT MODELS	TALL HE I GHT MODELS
	DD24SI	DD24STI DD24SHTI
PRODUCT DIMENSIONS	INCHES (MM)	INCHES (MM)
Overall height of product ¹	16 1/8" (410)	min. 17 7/8" 454
Overall width of product	23 9/16" (599)	23 9/16" 599
© Overall depth of product ²	22 1/2" (571)	22 1/2"571
Depth of chassis (to back of front drawer panel)	21 3/4" (553)	21 3/4" 553
© Depth of drawer front panel	5/8"-13/16" (16-20)	5/8" -13/16" (16-20)
Height of drawer front panel	min. 16 1/16" (408) ³	min. 17 13/16" (452 ⁴
Height of chassis ¹	16 1/8" (410)	17 7/8" (454)
Ventilation gap below drawer front panel	min. 1/6" (2)	min. 1/6" (2)
Maximum extension of drawer ²	21 7/16" (545)	21 7/16" (545)
¹ includes 1/16" (2mm) high bracket slots ² assuming a front panel thickness of T	1/16" (18mm)	
3 recommended for a $1/16$ " (2mm) ventilation gap below panel, if cavity height is 16	1/4" (412mm)	

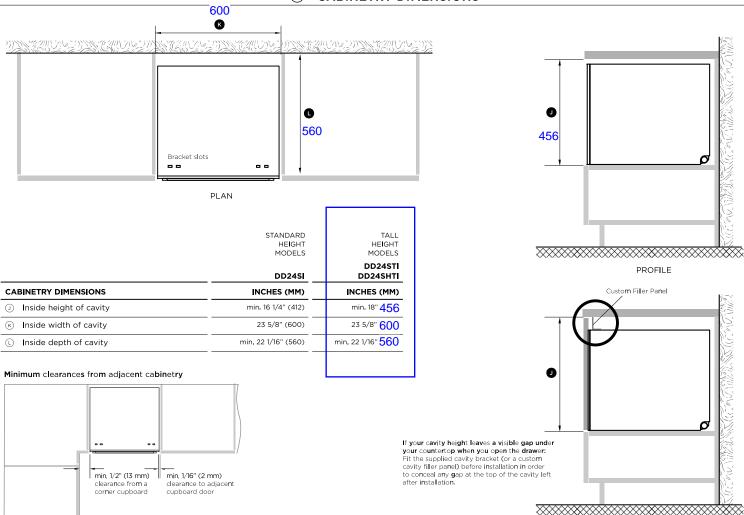


PROFILE




Universal 15" Built-In Compactor

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

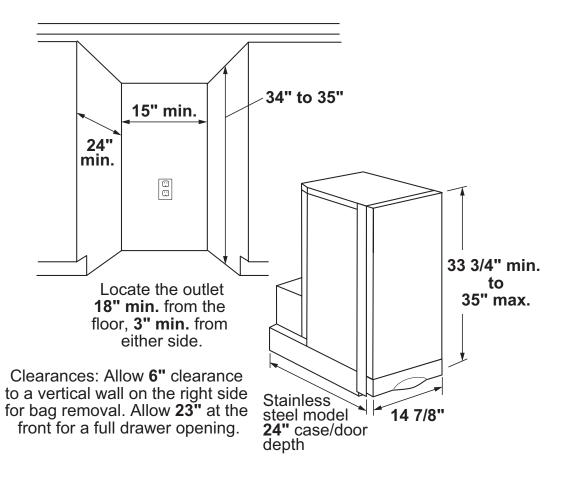





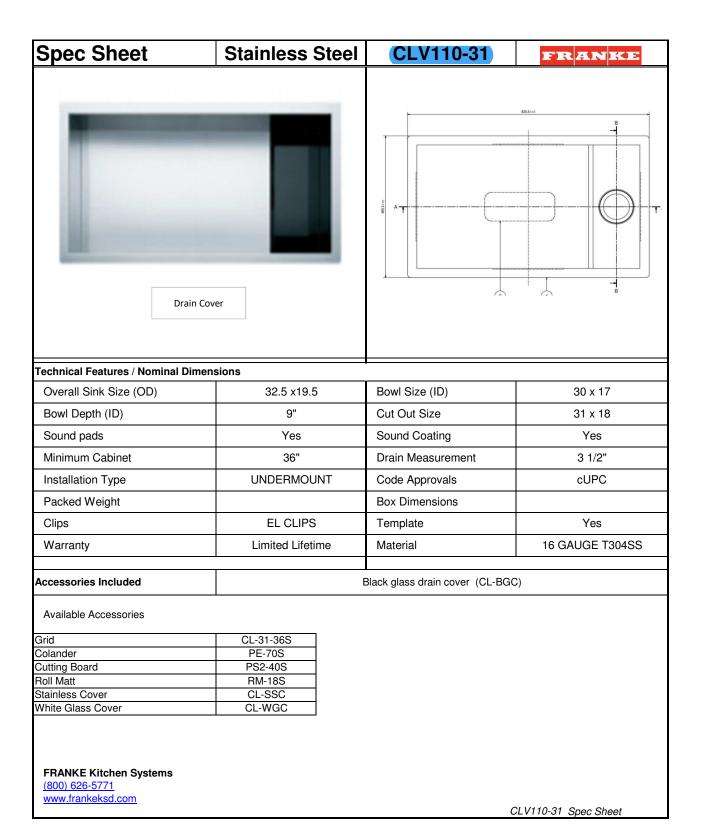


Peak - Granite PKG11014 Granite Storm

Product Picture



Technical Drawing

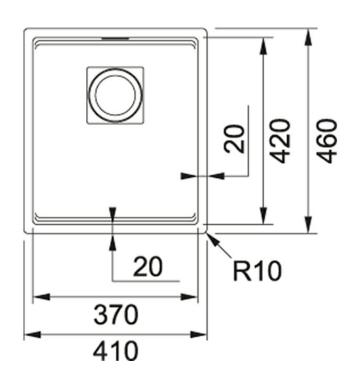

Product Dimensions

Length overall	16 1/8"
Width overall	18 1/8"
Length of large bowl	14 9/16''
Width of large bowl	16 9/16''
Depth of large bowl	7 7/8''
Minimum Cabinet Size	17 11/16"

General Information

Number of Bowls	1
Cut-Out Template	No

Article Numbers

FUN#	125.0507.825
US Part Number	PKG11014STO

