

30" Speed Combination Oven

800 Series – Stainless Steel HBL8752UC



Bosch HBL8752UC Oven



BOSCH

Invented for life

Installation Details

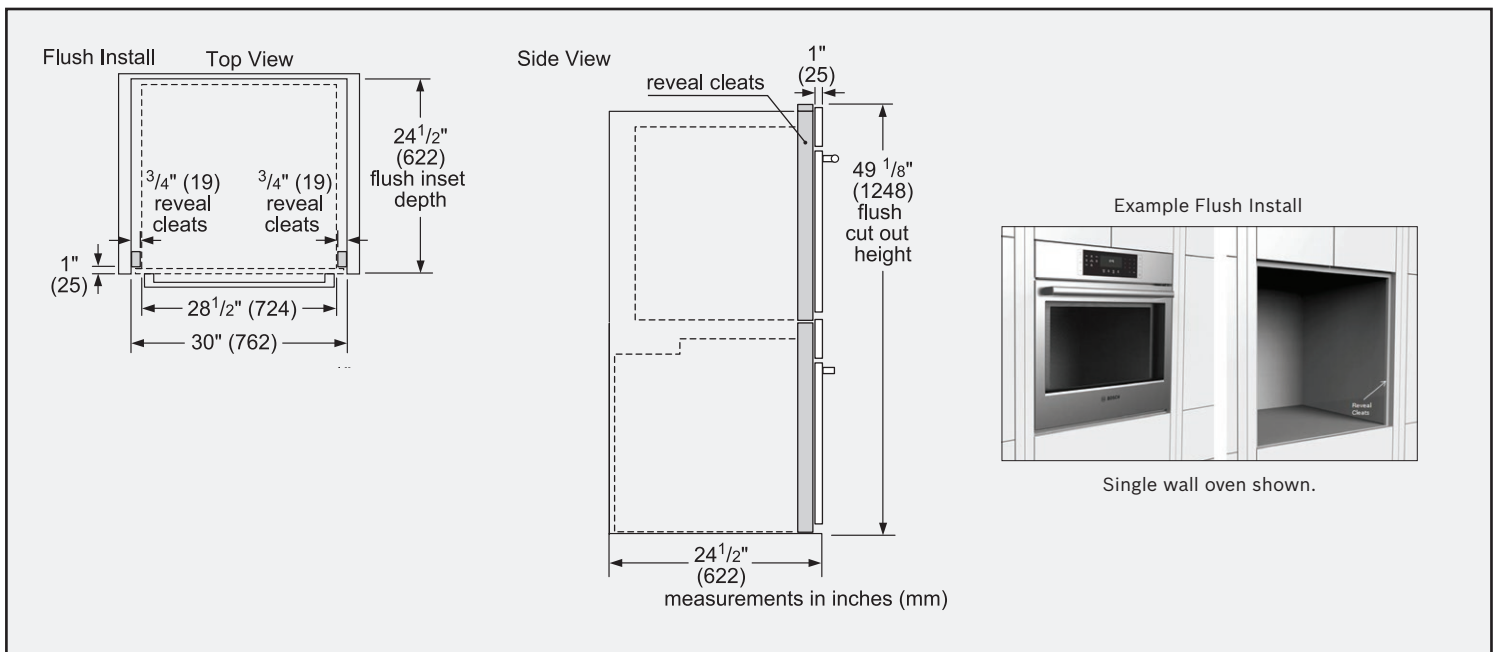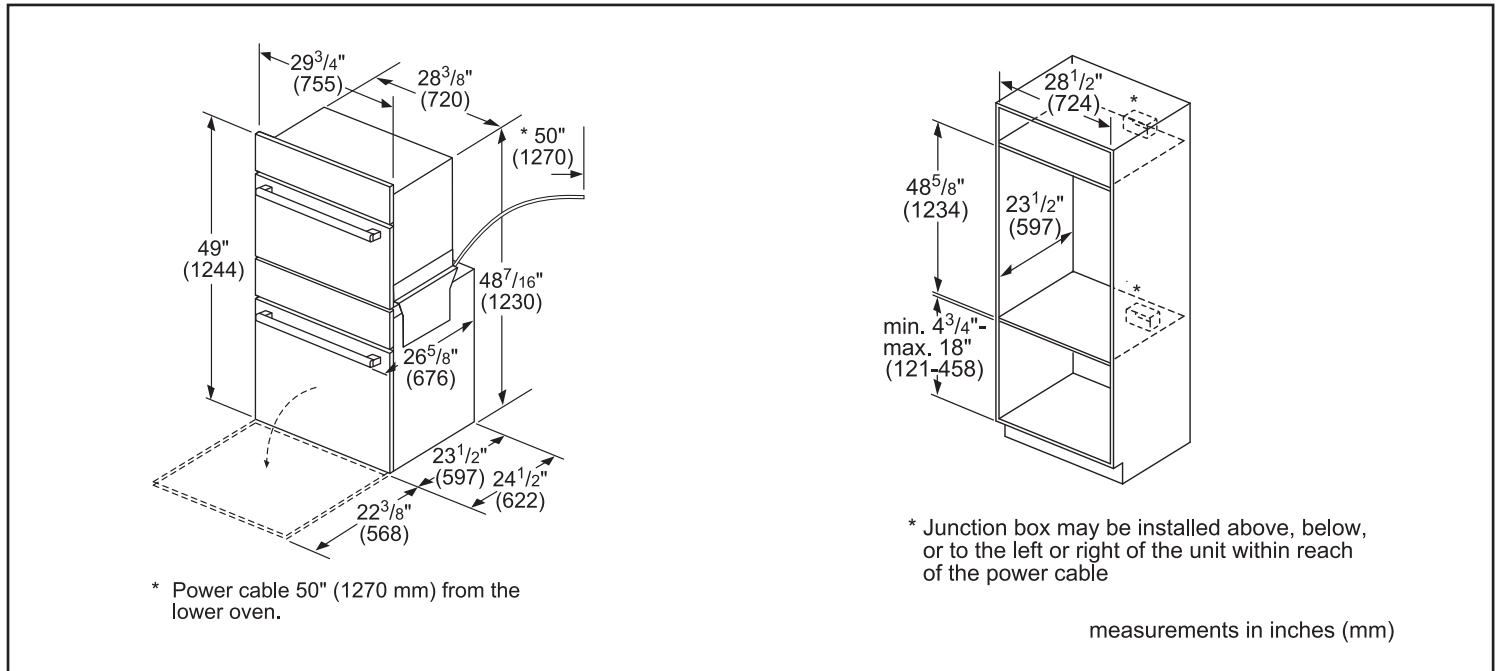

For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.



Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904



© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

CAVITY PREPARATION

Framed: Finished return, sides and top

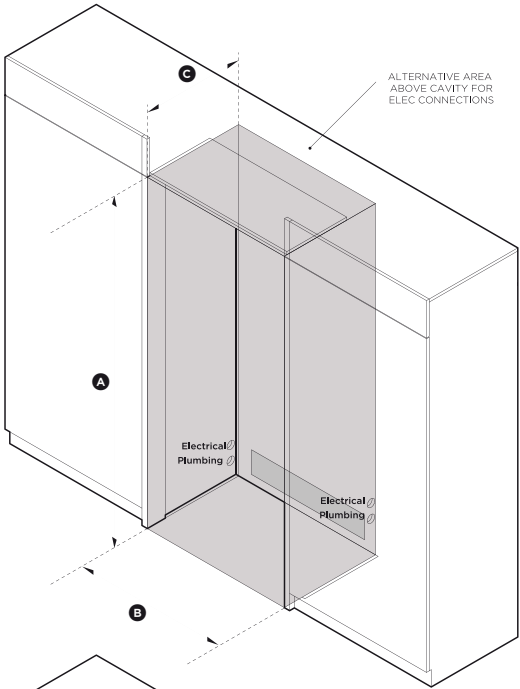

Frameless: Finished return, sides and top

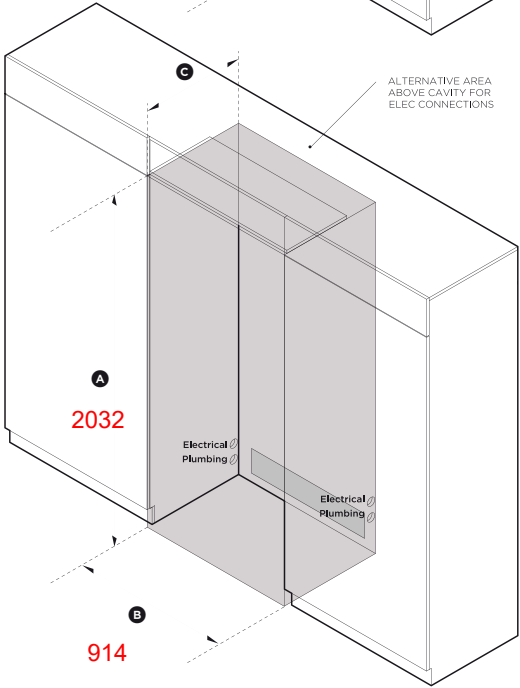

ISO VIEW OF CAVITY

914


36" ACTIVSMART™ BUILT-IN REFRIGERATOR

Model no:
RS36A80J1

Cavity Dimensions		in
Ⓐ Overall height of cavity		80"
Ⓑ Overall width of cavity		36"
Ⓒ Overall depth of cavity		24 3/4"

Specifications	
Electrical	
Supply	115 VAC, 60 Hz
Service	10 amp circuit
Plumbing	
Supply	1/4" (6mm) comp. stainless steel braided hose
Pressure	min 22 psi (150 kPa) max 120 psi (827 kPa) @ 68°F (20°C)


NOTE: Electrical connection can be located an adjacent cabinet to either side of the fridge or above the fridge cavity.

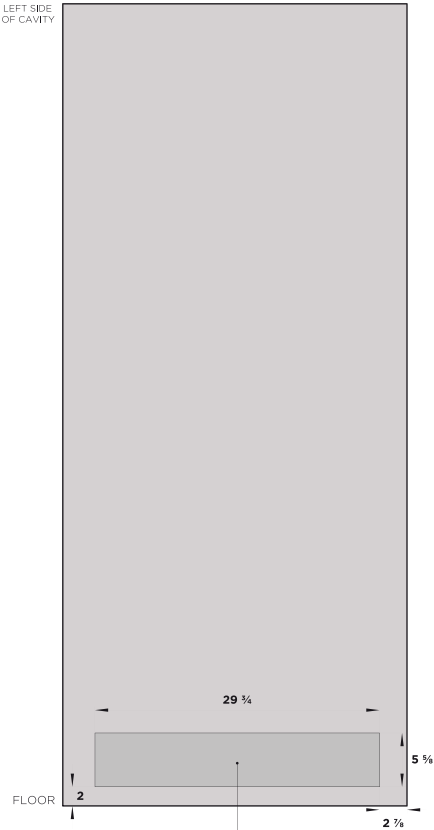

REAR OF CAVITY

IMPORTANT NOTE: The product dimensions and specifications apply at the date of issue. Under our policy of continuous product improvement, these dimensions and specifications may change at any time. Dimensions may vary by ±3/32". Please read the installation manual for detailed information on installing the product or visit fisherpaykel.com.

DATA SHEET

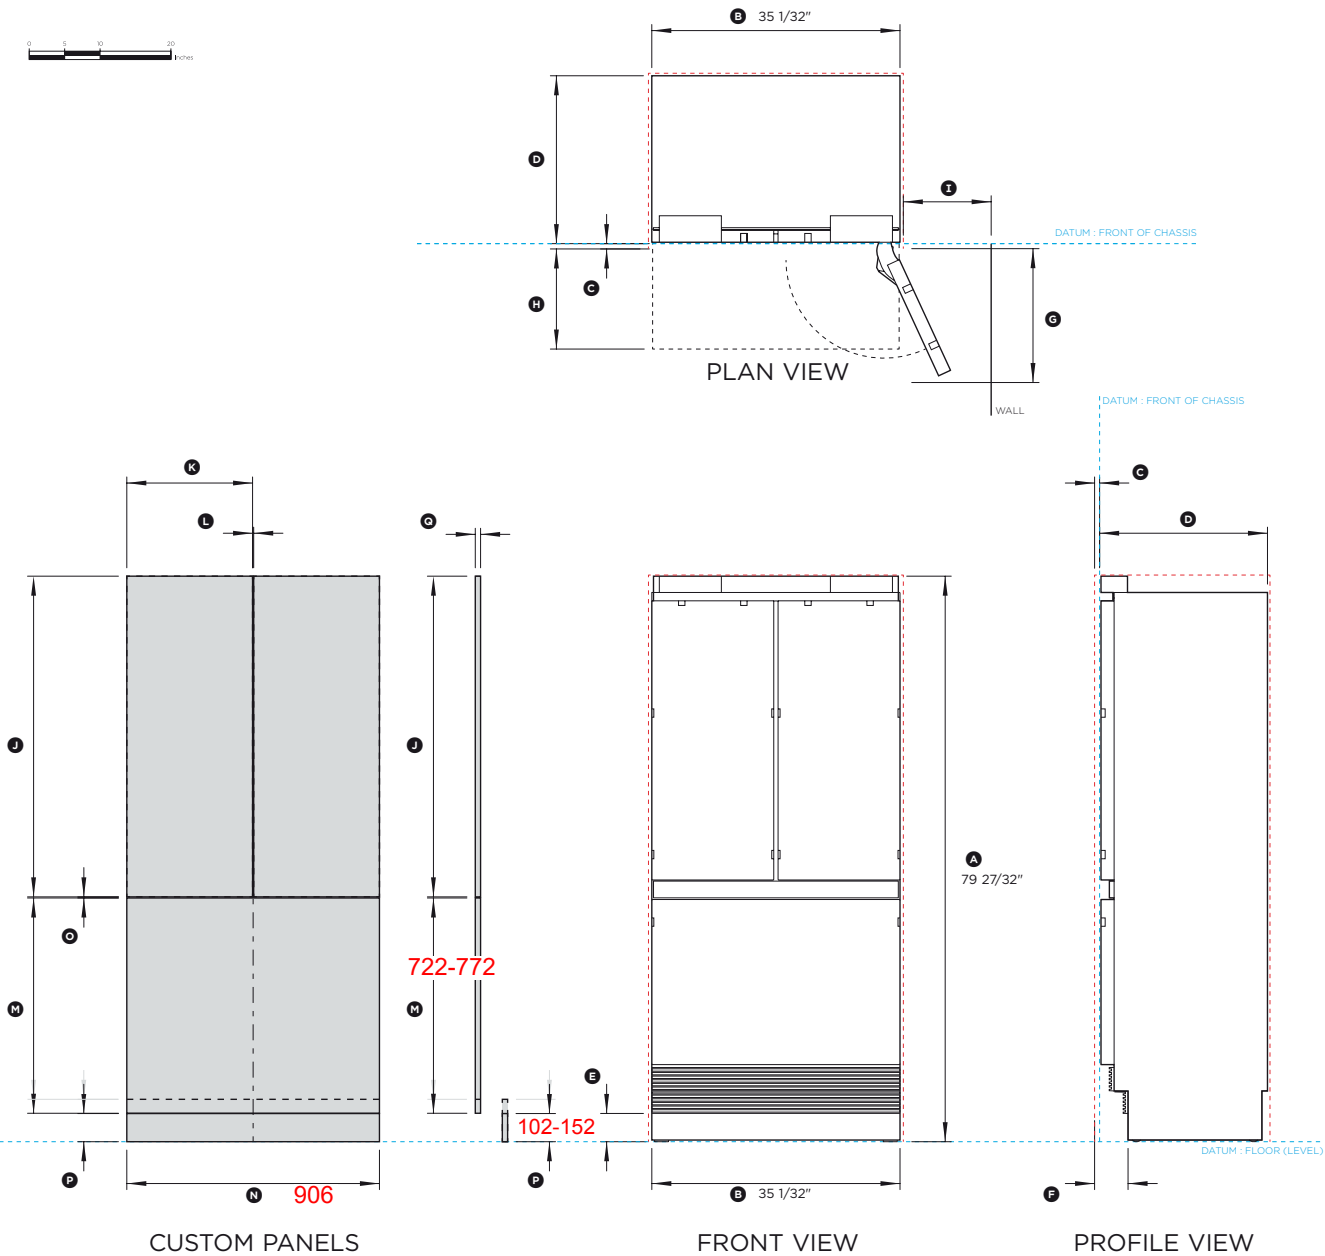

36" ACTIVESMART™ BUILT-IN REFRIGERATOR

Model no:

RS36A80J1

Product Dimensions	in
Ⓐ Overall height of fridge	79 27/32"
Ⓑ Overall width of fridge	35 1/32"
Ⓒ Depth of fridge front panels (excl. handles)*	3/4"
Ⓓ Overall depth of fridge (excl. front door panels)	23 3/4"
Ⓔ Height from bottom datum to top of toe kick	4"
Ⓕ Depth of toe kick measured from front of door panels*	4 3/4"
Ⓖ Depth of door (widest opening) measured from front of cabinetry	18 29/32"
Ⓗ Depth of drawer (open) measured from front of cabinetry*	14 3/16"
Ⓘ Minimum door clearance** to adjacent wall (115° - full internal access)*	12 13/32"

* Door panels to be manufactured and fitted by cabinetmaker, thickness min 5/8" - max 3/4".

** Measured from front cabinetry edge.

Custom Panel Dimensions	in
⓫ Height of top door panel	45 9/32"
⓬ Width of top door panel	17 3/4"
⓭ Gap between top door panels	5/32"
⓯ Height of bottom drawer panel	28 13/32"- 30 13/32"
⓰ Width of bottom drawer panel	35 21/32"
⓱ Gap between top door panels and bottom drawer panel	5/32"
⓲ Height of toe kick panel*	4" - 6"
⓳ Depth of custom panels	min 5/8" max 3/4"
Maximum weight of an individual top door panel	22 pounds
Maximum weight of bottom drawer panel	21 pounds

10kg
9.5kg

* The bottom grille can be reduced to allow for a higher toe kick. Adjust the height of the bottom drawer panel accordingly.

Minimum Clearances	in
Minimum cabinetry gap clearance from edge of custom panels	5/32"
Overall height of cavity	80"
Overall width of cavity	36"
Overall depth of cavity	24 3/4"

INDICATES PRODUCT DATUM

INDICATES MINIMUM CABINETRY CLEARANCES

IMPORTANT NOTE: The product dimensions and specifications apply at the date of issue. Under our policy of continuous product improvement, these dimensions and specifications may change at any time. Dimensions may vary by ±3/32". Please read the installation manual for detailed information on installing the product or visit fisherpaykel.com.


IH75-US-29188

ProInox H75

Stainless steel kitchen sink

Handcrafted

Contemporary style corners [0,75"]

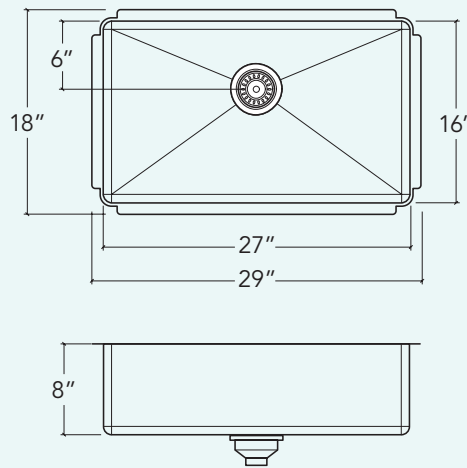

Installation

Undermount

Bowl

27" × 16" × 8"

Overall

29" × 18" × 8"

Recommended cabinet

33"

Drain

Ø 3 ½"

Packaging


30" × 21 ½" × 13"

28 lbs

Features

- 304 brushed finish stainless steel (18/10) – 18 gauge
- Sound deadening pads for maximum noise reduction
- Drain located towards rear providing more space under the sink
- Stainless steel strainer (AA-SA-3.5-SA) and mounting hardware included
- Product certified ASME A112.19.3, CSA B45.0, and CSA B45.4

Must-have accessories



Grid
IH-G-2716




Colander
IH-CA-16



Bin
IH-BI-16



Wood cutting board
IH-BA-16-MA



Plastic cutting board
IH-BB-16-WH

24" Custom Panel Dishwasher

800 Series – Custom Panel SHVM98W73N






Bosch SHVM98W73N Dishwasher



BOSCH

Invented for life

Installation Details

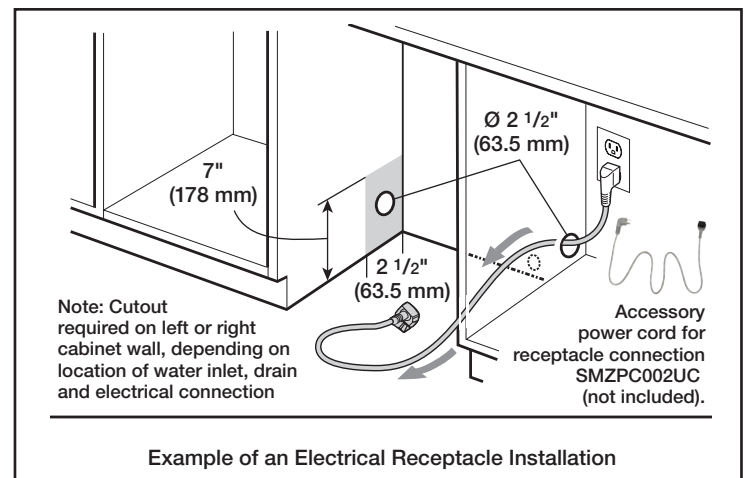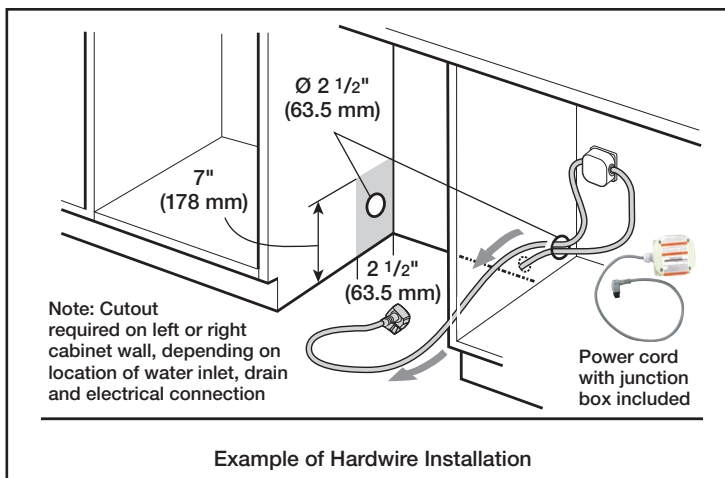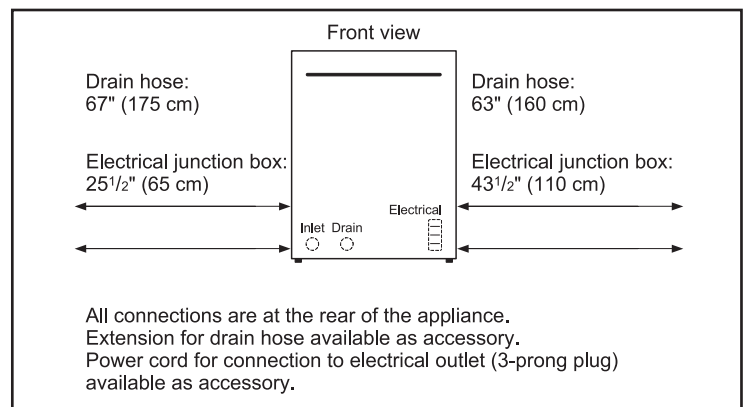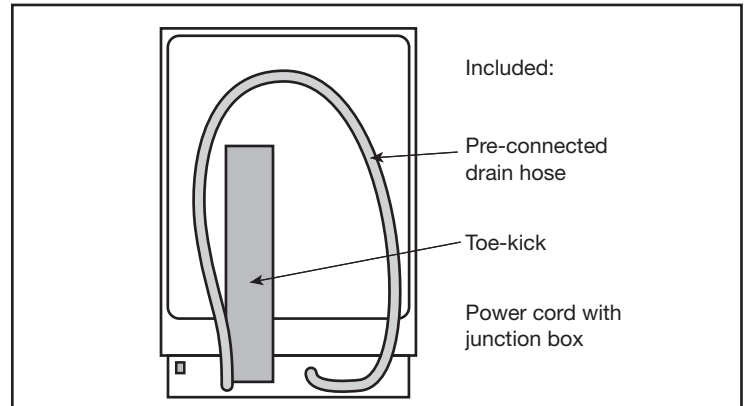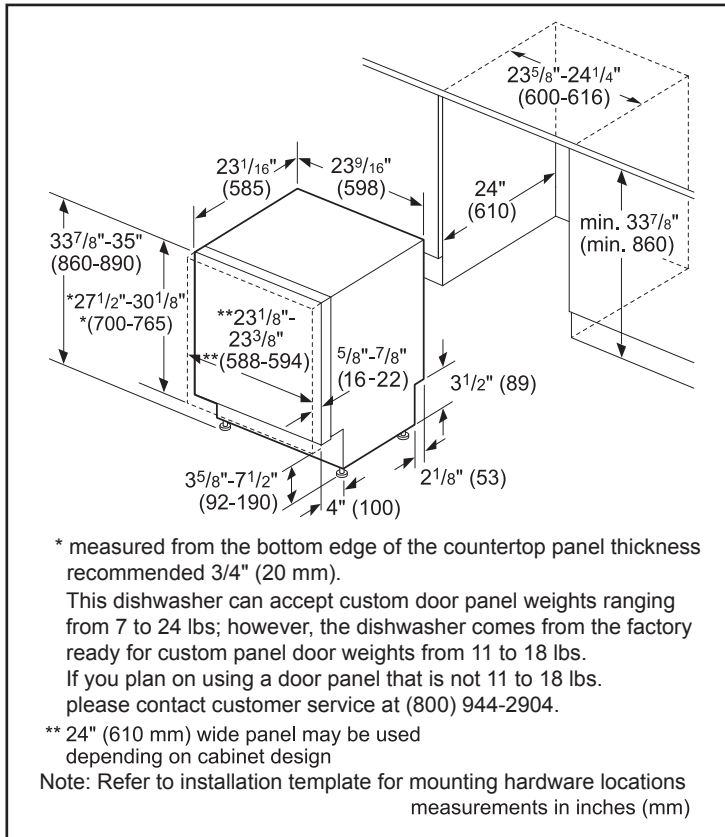

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


07/18

36" Flush-Mounted Gas Cooktop KM 2355



Miele KM2355 Cooktop


INSTALLATION DIMENSIONS

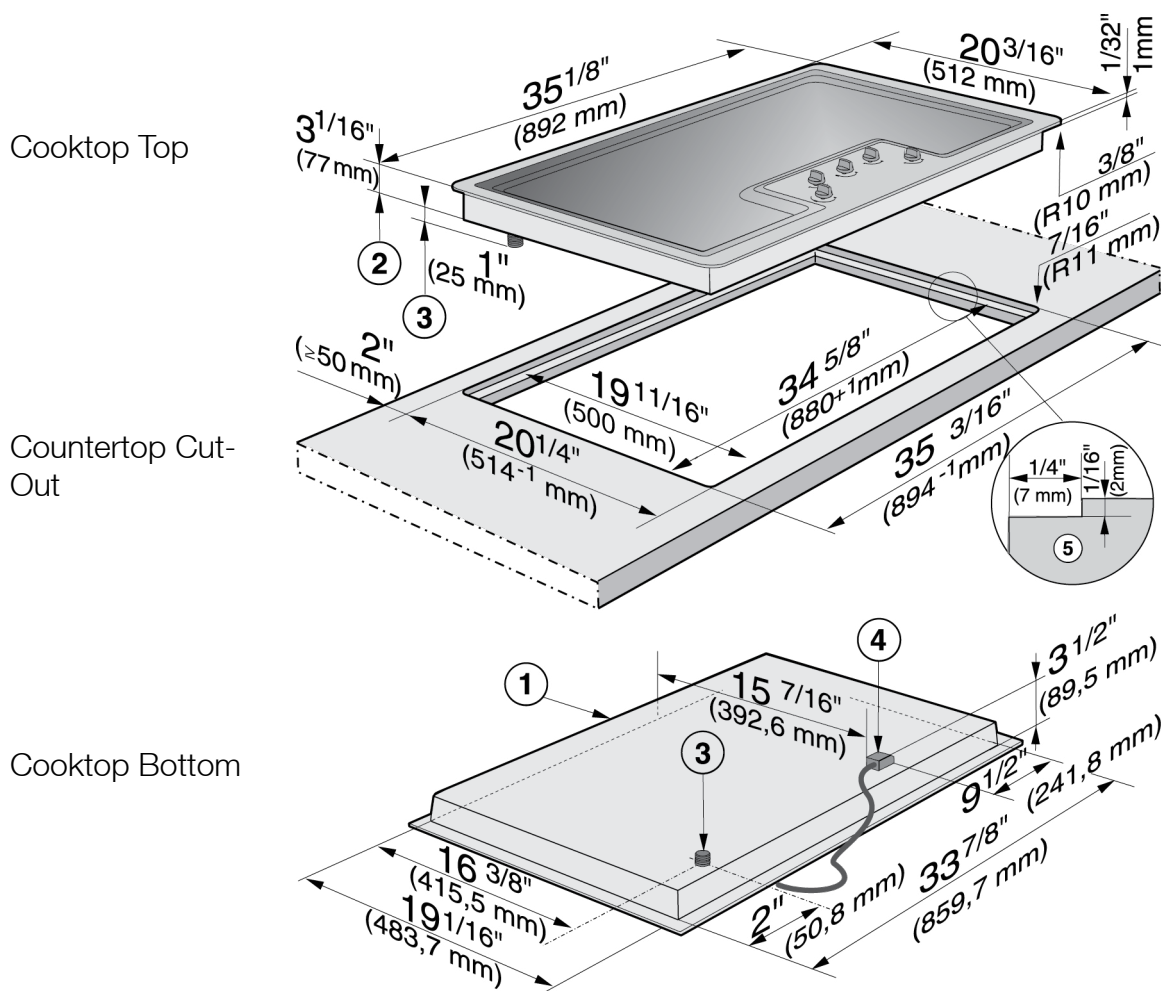

- ① Appliance front
- ② Installation height
- ③ Gas connection
- ④ Power supply box with connection cable, L = 4 ft (1.2 m)

36" Built-In Wall Cabinet Hood


INSTALLATION SPECIFICATIONS

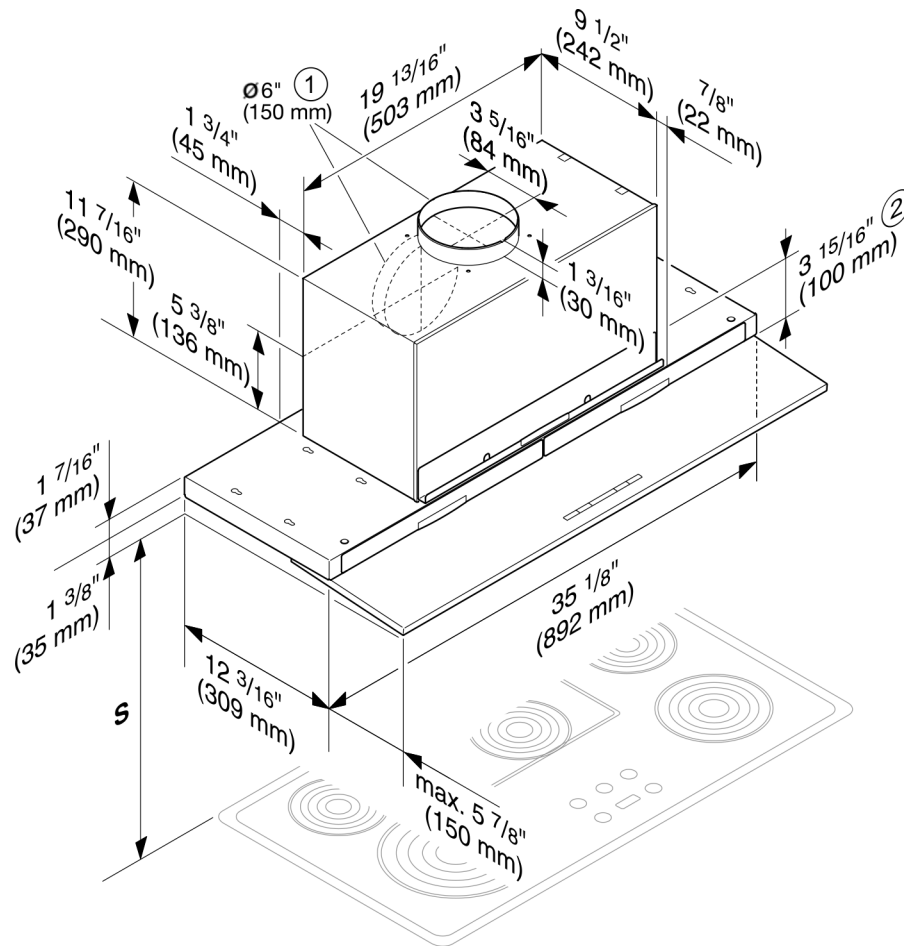

- ① The ducting can also be connected at the back.
- ② After installation, the wall unit can be fitted with an interim panel. If this is done, make sure that the slots for the grease filters and, for the charcoal filters in recirculation mode, remain easily accessible.
- ⑤ Please see Page 5 of Specification Sheet for further details.

36" Built-In Wall Cabinet Hood

INSTALLATION SPECIFICATIONS

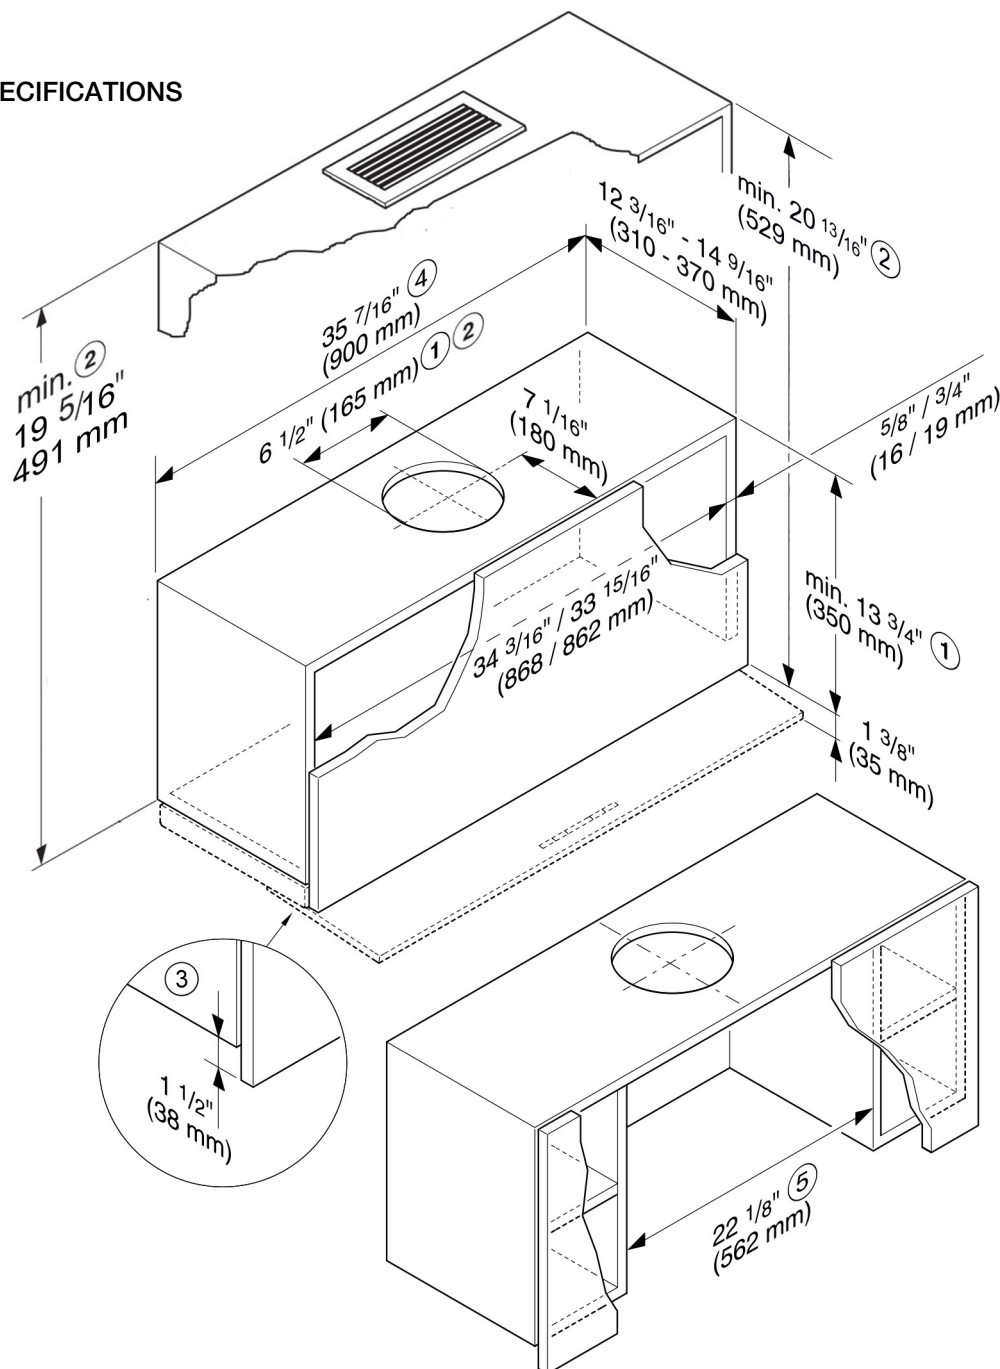

- ① Extraction, recirculation with conversion kit DUU 150.
- ② Recirculation mode with conversion kit DUU 151.
- ③ The wall unit carcass needs to be 1 1/2" (38 mm) shorter than the wall unit door.
- ④ Installation is also possible in a 23 5/8" (600 mm) wide unit. In the process, the following must be observed:

- The side units must also be shortened by 1 1/2" (38 mm).
- The doors of the built-in unit and side units must be opened to the top so that the grease filters are accessible.
- ⑤ Alternatively, the wall unit can be fitted with side sections.