



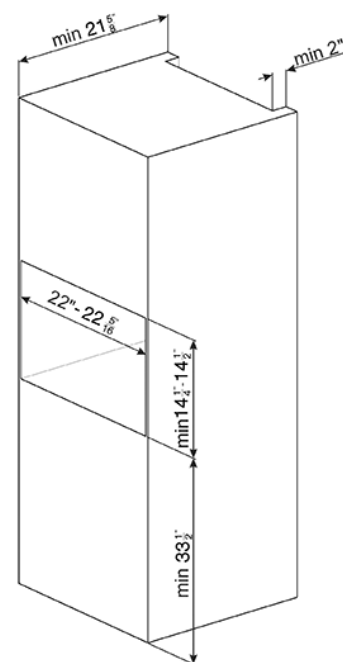

MI20XU

60CM (Approx 24") Built-in Microwave
Stainless Steel
EAN13: 8017709192730




• Microwave with grill, multiple programs • Fingerproof stainless steel • 36 Automatic Programs including Memory and Slow cook • Automatic defrosting by time or weight • Stainless steel interior cavity • Lateral opening door • Single LED display • Quick Start Option • Control Lock / Child Safety • Natural Cooling system • 9 3/4" Turntable • Microwave power: 800 W • Broil element: 900 W • Voltage rating 110V / 60Hz • Connected load (nominal power): 1,280 W • Amps @ 110 V: 11 Amps • **Accessories included:** • Frame kit for built-in installation • 1 Grid • **For availability please contact Smeg USA**

Functions



Main Oven

INSTALLATION SPECIFICATIONS

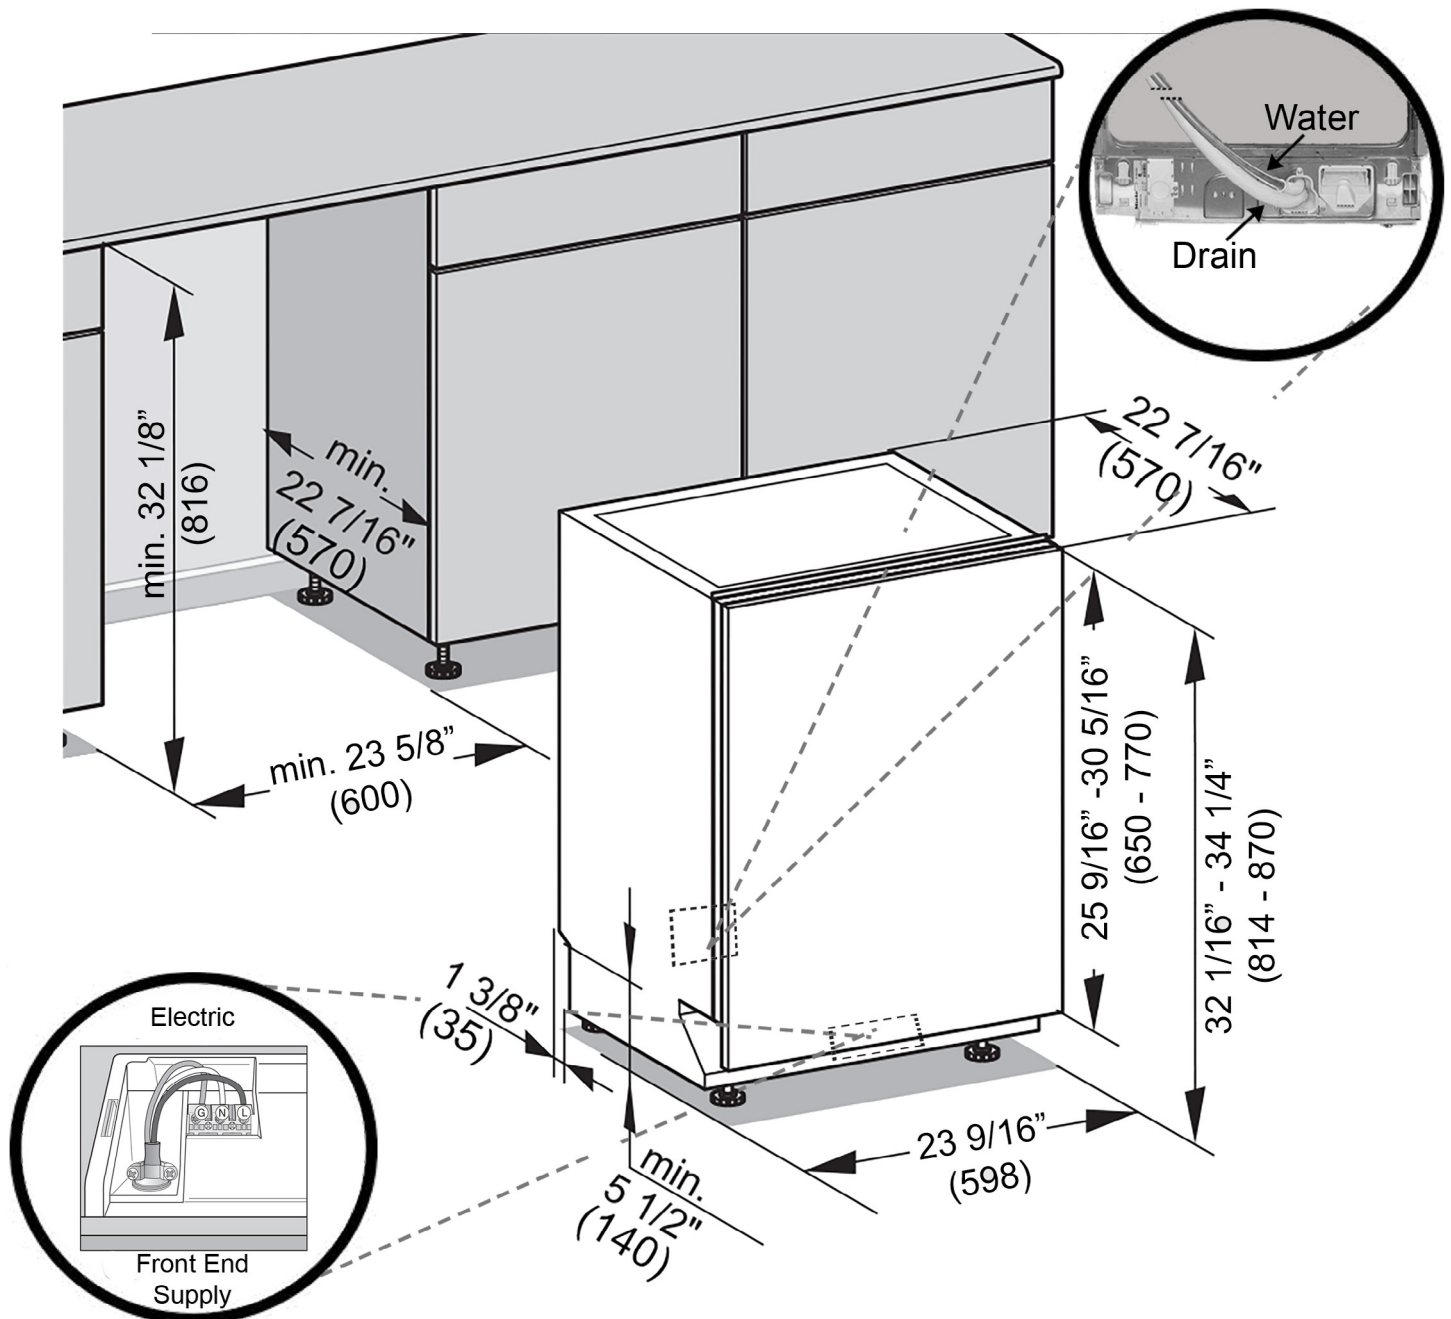


Drain - 4 ft 11 in (1.5 m) flexible drain hose.
(Connects from lower center rear)

Water - 4 ft 11 in (1.5 m) flexible water intake hose with 3/8\" compression fitting.
(Connects from lower center rear)

Electric - 4 ft 11 in (1.5 m) 120V 15 A 3 wire molded NEMA 5-15 plug power supply. (Connects via Front End Supply or may be hardwired)

Custom Panel Installation

Some Miele dishwashers do not come equipped with a front panel. These dishwashers are designed to accept a custom door panel supplied by a cabinet maker. Miele has a unique panel integration system which allows the dishwasher to align with the surrounding cabinets.

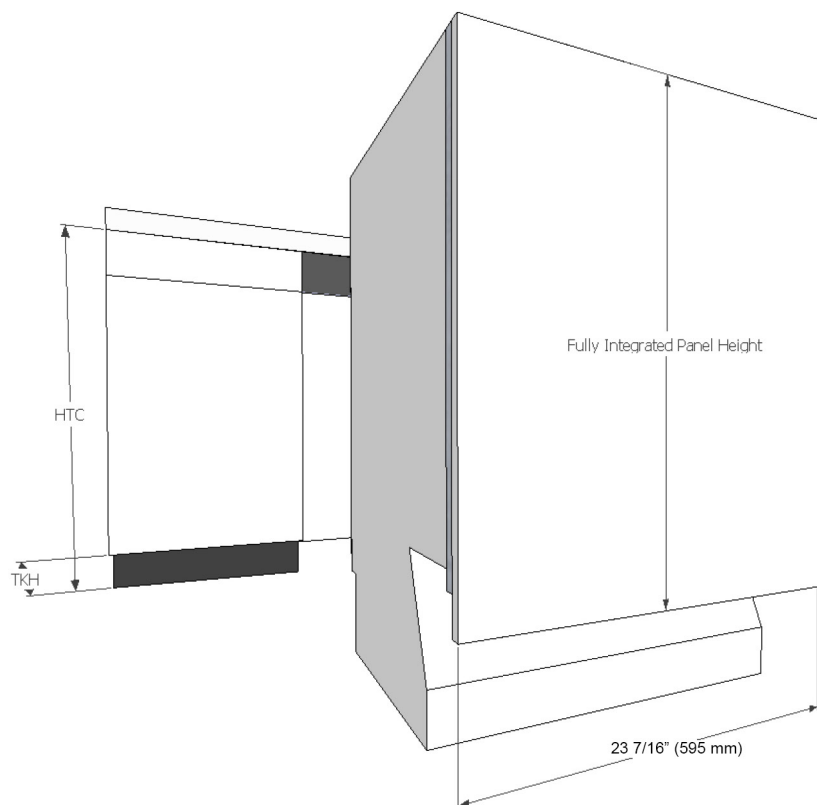

Width: 23 7/16" (595 mm) in all Cases
Thickness: 3/4" (19 mm) in all Cases
Height: Determined using the following calculation:

$$\text{Panel Height} = \text{HTC} - \text{TKH}$$

HTC = Height to the underside of countertop
TKH = Toe kick height

Note: Control panel is along the top edge of the unit. It is not visible when the unit is closed. A handle **MUST** be located on front of panel in order to open unit. (Except K2o models).

Maximum panel height: 30 5/16" (770 mm)

Minimum panel height: 25 9/16" (650 mm)

Maximum panel weight: 21 lbs (9.5 kg)


GFVI Installations

Miele offers pre-fabricated stainless steel panels for all fully integrated units. These panels are designed for various toe kick heights and offer a choice of handle options. See Miele Product Brochure for more info.

DATA SHEET

36" ACTIVSMART™ FRIDGE - FRENCH DOOR

Model no:
RF610ADX4, RF610ADX5
RF610ADW4, RF610ADW5
RF540ADX4, RF540ADX5
RF201ADX4, RF201ADX5, RF201ADW5

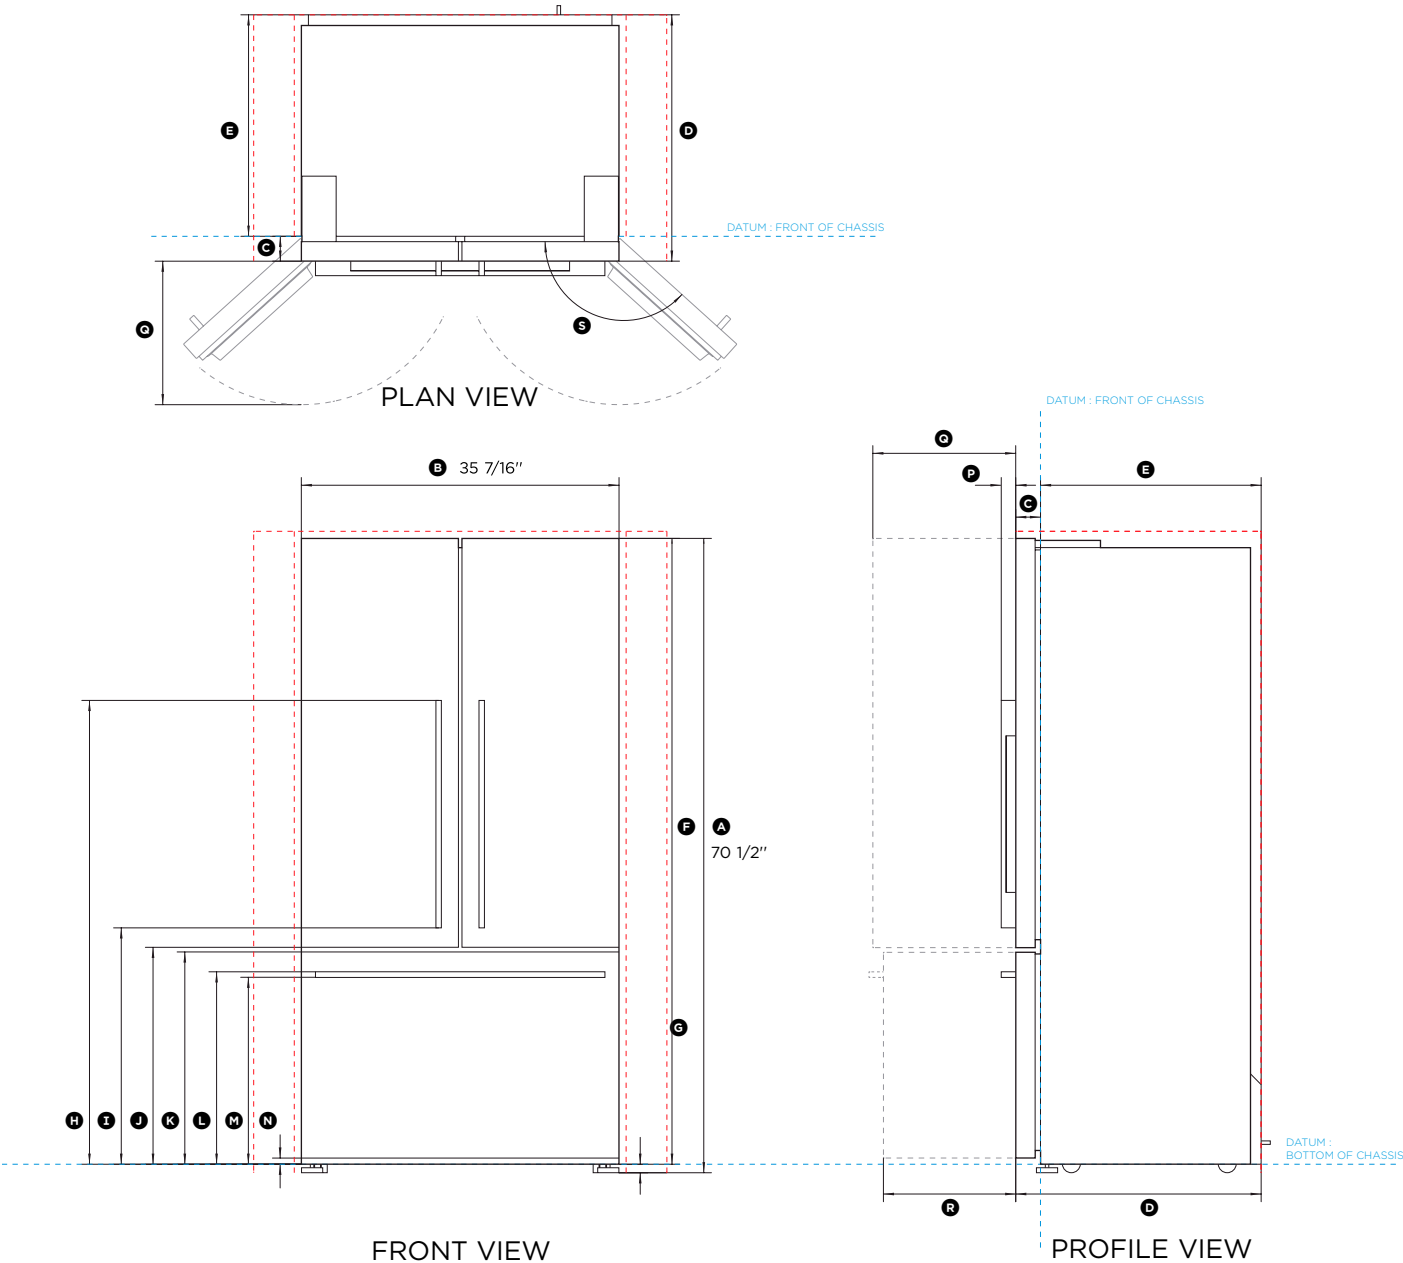

Product Dimensions		in
Ⓐ Overall height* of fridge	1791	70 1/2"
Ⓑ Overall width of fridge	900	35 7/16"
Ⓒ Depth of fridge door and gasket (excludes handle)		2 3/4"
Ⓓ Depth of fridge door and chassis (excludes handle)	695	27 3/8"
Ⓔ Depth of fridge chassis (does not include fridge door)		24 5/8"
Ⓕ Height from bottom datum to top of fridge door		69 1/2"
Ⓖ Height of feet (adjustable)		15/16"
Ⓗ Height from bottom datum to top of top handle		52 1/2"
Ⓘ Height from bottom datum to bottom of top handle		27 3/16"
Ⓛ Height from bottom datum to bottom of top door		25 1/16"
Ⓜ Height from bottom datum to top of bottom door		24 1/2"
Ⓢ Height from bottom datum to top of bottom handle		22 5/16"
Ⓤ Height from bottom datum to bottom of bottom handle		21 11/16"
Ⓡ Height from bottom datum to bottom of bottom door		5/8"
Ⓚ Width of handle		5/8"
Ⓣ Depth of handle (measured from front of door)	41	1 5/8"
Ⓤ Depth of door (open at 90°) (measured from front of door)		15 15/16"
Ⓡ Depth of drawer (open) (measured from front of drawer) excluding handle		14 3/4"
Ⓢ Rotation of door (open) (measured from front of door)		138°
* Includes mounted feet		
Minimum Clearances		in
Minimum height of cavity	1810	71 1/4"
Minimum side clearance installed flush with chassis		13/16"
Side clearance (hinge side) - installed flush with door - full rotation		5 5/16"
Rear clearance (including evaporator tray)		1 3/16"

INDICATES PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----

DATE: 23.10.2015

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. www.fisherpaykel.com

KENMORE ELECTRIC WALL OVEN INSTALLATION INSTRUCTIONS

(and Optional Electric or Gas Cooktop Combination)

⚠ WARNING Do not remove spacers (if equipped) on the side walls and/or on the back of the built-in oven. These spacers center the oven in the space provided. The oven must be centered to prevent excess heat buildup that may result in heat damage or fire.

Kenmore 790-48193001 Oven

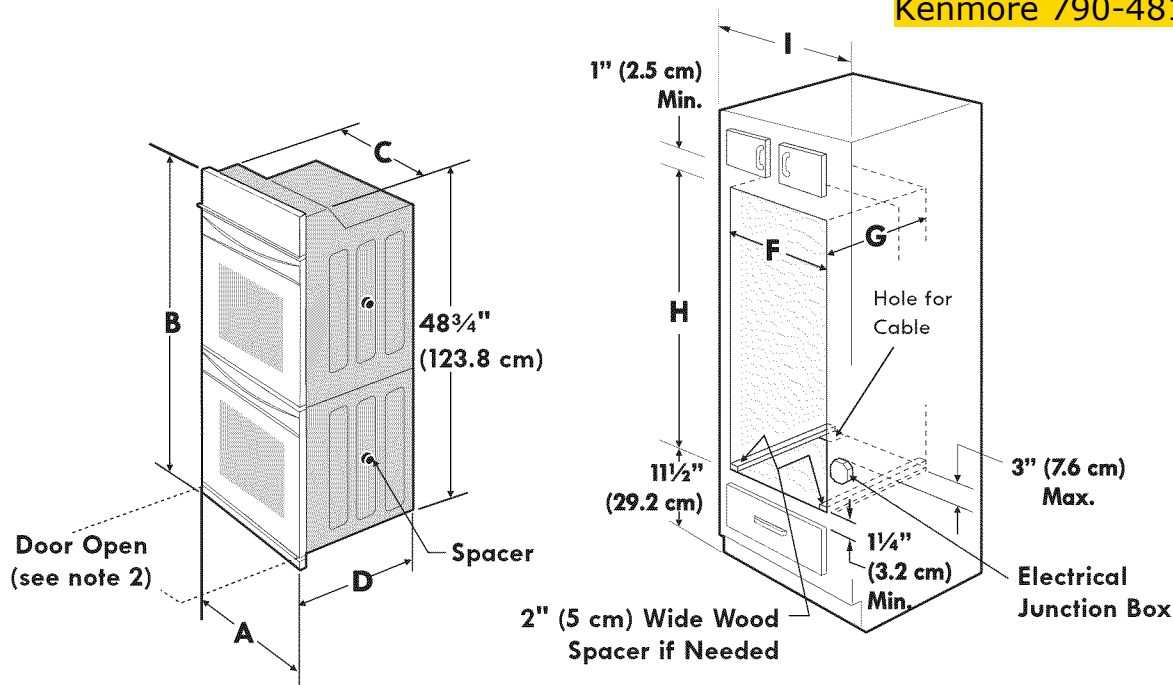


Figure 2

27" AND 30" DOUBLE OVENS (Single Ovens see Figure 1)

NOTES:

1. Base must be capable of supporting 300 pounds (136 kg) for 27" models and 375 pounds (170 kg) for 30" models.
2. Allow at least 21" (53.3 cm) clearance in front of oven for door depth when it is open.
3. Dimension **G** (cutout depth) is critical to the proper installation of the built-in oven. If the oven decorative trim does not butt against the cabinet, or if noise is heard on convection models, verify dimension **G** to assure it is according to the required dimension.

4. For a cutout height greater than 49 1/4" (125.1 cm) add a 2" (5 cm) wide wood shim of appropriate height to each side of the opening under the appliance side rails.

* For Cutout height between 51 13/16" (131.6 cm) and 51 15/16" (131.9 cm), you can order a larger bottom trim kit by calling the Service Center.

	Stainless Steel	Black	White
Trim 27"	903114-901S	903114-9010	903114-9011
Trim 30"	903114-910S	903114-9100	903114-9101

PRODUCT DIMENSIONS						
MODEL	A		B	C		D
27" (68.6cm)	27 (68.6)		50½ (128.3)	24 ⁵ / ₈ (62.5)		24½ (62.2)
30" (76.2cm)	30 (76.2)		50½ (128.3)	28¼ (71.8)		24½ (62.2)
CUTOUT DIMENSIONS AND CABINET WIDTH						
MODEL	F		G (min.)	H		I
	Min.	Max.		Min.	Max.	
27" (68.6cm)	24 ⁷ / ₈ (63.2)	25¼ (64.1)	23½ (59.7)	48 ⁷ / ₈ (124.1)	49 ⁷ / ₈ (126.7)	27 ¹ / ₈ (68.9) Min.
30" (76.2cm)	28½ (72.4)	29 (73.7)	23½ (59.7)	48 ⁷ / ₈ (124.1)	49 ⁷ / ₈ (126.7)	30 ¹ / ₈ (76.5) Min.

All dimensions are in inches (cm).

GAS COOKTOP INSTALLATION INSTRUCTIONS

INSTALLATION AND SERVICE MUST BE PERFORMED BY A QUALIFIED INSTALLER.
IMPORTANT: SAVE FOR LOCAL ELECTRICAL INSPECTOR'S USE.
 READ AND SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.



⚠ WARNING If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury or death.

FOR YOUR SAFETY:

- **DO NOT** store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- **WHAT TO DO IF YOU SMELL GAS:**
 - **DO NOT** try to light any appliance.
 - **DO NOT** touch any electrical switch; **DO NOT** use any phone in your building.
 - Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
 - If you cannot reach your gas supplier, call the fire department.
- Installation and service must be performed by a qualified installer, service agency or the gas supplier.

Appliances Installed in the state of Massachusetts:

This Appliance can only be installed in the state of Massachusetts by a Massachusetts licensed plumber or gas fitter. This appliance must be installed with a three (3) foot / 36 in. long flexible gas connector. A "T" handle type manual gas valve must be installed in the gas supply line to this appliance.

PRODUCT DIMENSIONS

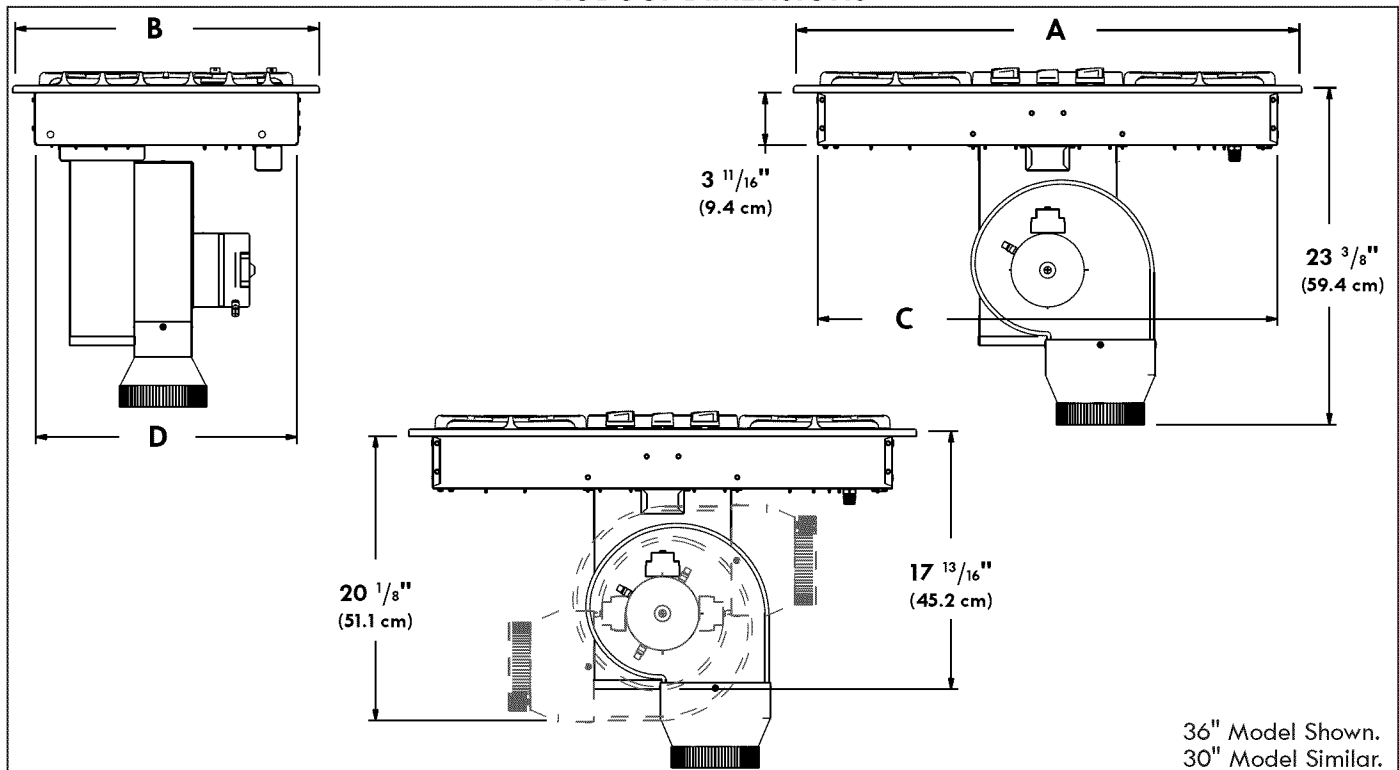


Figure 1

PRODUCT DIMENSIONS				
MODEL	A. COOKTOP WIDTH	B. COOKTOP DEPTH	C. CHASSIS WIDTH	D. CHASSIS DEPTH
30" Gas Cooktop	30" (76.2 cm)	21 13/32" (54.4 cm)*	26 13/16" (68.1 cm)	18 15/16" (48.1 cm)
36" Gas Cooktop	36" (91.4 cm)	21 23/32" (55.1 cm)	32 11/16" (83.0 cm)	18 15/16" (48.1 cm)

All dimensions are stated in inches and (cm).

* Dimension at center of cooktop.

Printed in U.S.A.

316902922 (1206) Rev. B
 English - pages 1-14

GAS COOKTOP INSTALLATION INSTRUCTIONS

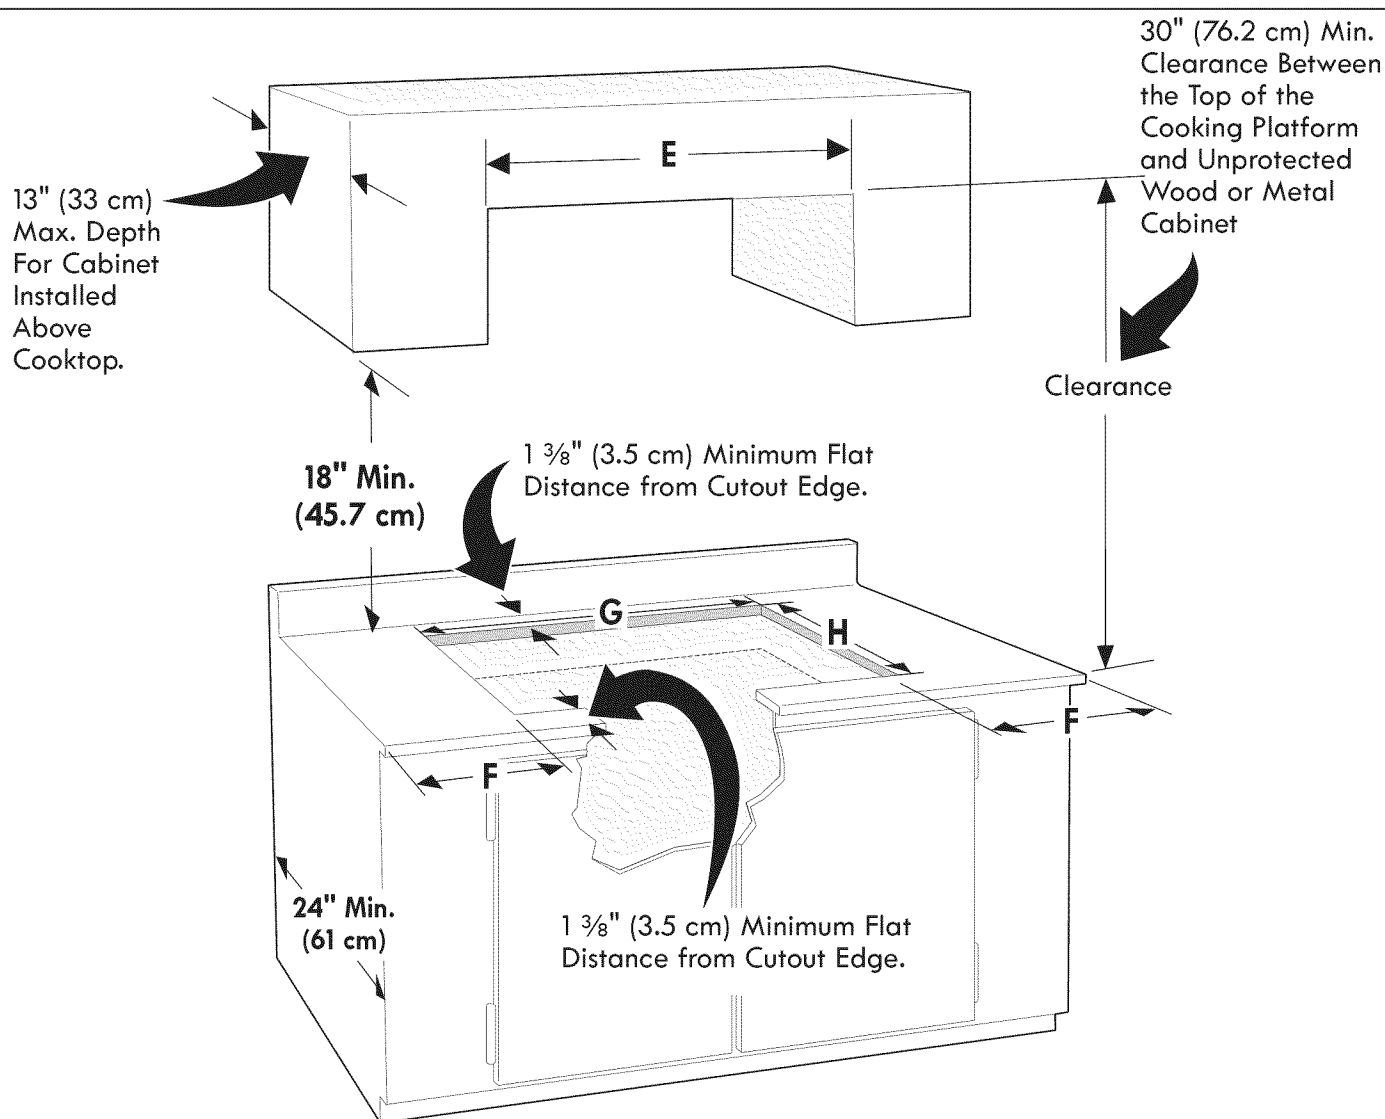


Figure 2 – CABINET DESIGN

MODEL	E. Top Cabinet Minimum Side Clearance	F. Minimum Clearance from Each Side	G. Cutout Width $\pm 1/16$ (0.2 cm)	H. Cutout Depth $\pm 1/16$ (0.2 cm)
30" Cooktop*	30" (76.2 cm)	9" (22.9 cm)	27 ¹ / ₁₆ " (68.7 cm)	19 ³ / ₁₆ " (49.2 cm)
36" Cooktop	36" (91.4 cm)	9" (22.9 cm)	32 ¹⁵ / ₁₆ " (83.7 cm)	19 ³ / ₁₆ " (49.2 cm)

CAUTION To eliminate the risk of burns or fire from reaching over heated surfaces, cabinet storage space located above the cooktop should be avoided.

* For installations involving replacing an existing cooktop, the cutout depth (H) in the countertop may be larger than the above recommendation. A Gap Filler Trim Kit is available which will then allow for a maximum cutout depth (H) of 21 ³/₁₆".

The Gap Filler Trim Kit part number is 5304488403.

Before beginning installation, refer to the instructions included with Gap Filler Trim Kit 5304488403 for countertop dimensions, cutout limitations, and proper location of ductwork.

GAS COOKTOP INSTALLATION INSTRUCTIONS

8 Installing the Ductwork

Use galvanized or aluminum duct in 6" round or 3 1/4" x 10" size, or a combination of both. PVC duct should be used if installing under a poured concrete slab. Use the shortest and straightest duct run possible. For satisfactory performance, the duct run should not exceed 100 feet equivalent length. Refer to the "Calculating Duct Length" chart for equivalent lengths. (see page 14). All duct joints should be fastened with a screw and sealed with tape as shown in Figure 5.

NOTE: Local building code must be followed in specifying approved type and schedule of ALL duct used. Always use an appropriate roof or wall cap with damper.

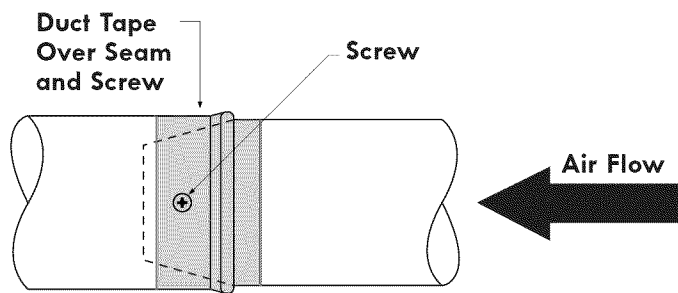


Figure 5 – DUCT TAPE OVER SEAM AND SCREW

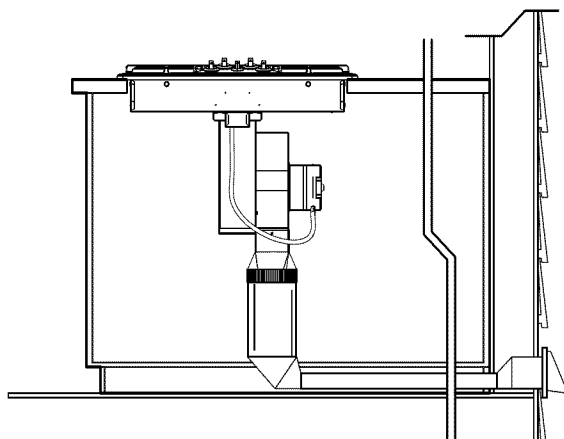


Figure 6 – DUCT ON-THE-FLOOR

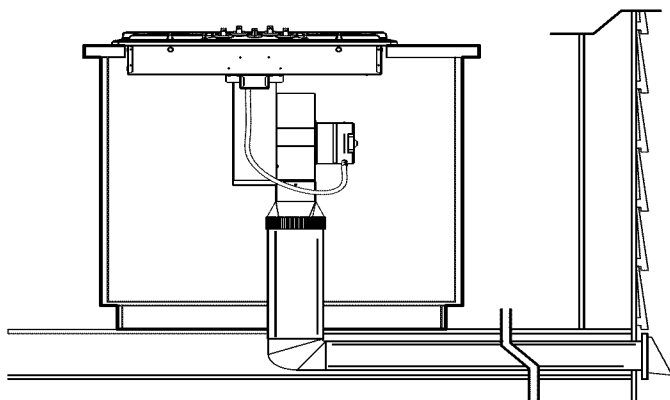


Figure 7 – DUCT THROUGH-THE-FLOOR

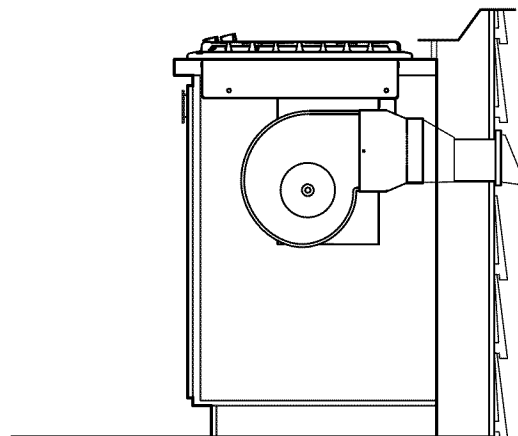


Figure 8 – DUCT THROUGH-THE-WALL

9 Preparing for Ductwork

Cut hole in cabinet wall or floor as appropriate for your installation. Make sure exhaust duct is located between wall studs or floor joists. (Figure 9, 10, 11, 12, 13A & 13B)

NOTE: Ductwork **MUST** be vented to outside.

DO NOT vent into a wall, ceiling, crawlspace, attic or any concealed space.

WARNING When cutting or drilling into wall or ceiling, **DO NOT** damage electrical wiring and other hidden utilities.

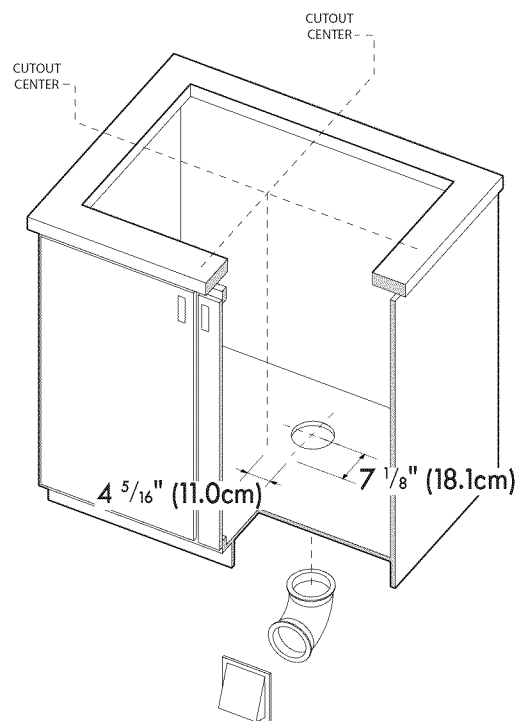


Figure 9 – 30" MODEL
BOTTOM DUCTWORK HOLE