

GE® ADA Compliant Stainless Steel Interior Dishwasher with Sanitize Cycle

ELECTRICAL RATING

Voltage AC.....	120
Hertz.....	60
Total connected load amperage.....	8.9

The diagram illustrates the required clearances for utility line entrances under a countertop. Key dimensions include:

- Countertop Thickness:** 6"
- Clearance from Floor:** 32-3/8" min. to 34-3/4" max.
- Entrance Width:** 4"
- Side Clearances:** 5" on each side of the entrance.
- Back Clearance:** 3"
- Overall Width:** 24"
- Angles:** 90° corners are indicated.

Electrical, drain and water supply line entrances must be confined to shaded areas to avoid interference with components.



ADA
COMPLIANT



Specification Revised 2/21

GDT226SILII



GE® ADA Compliant Stainless Steel Interior Dishwasher with Sanitize Cycle

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

All units ship with complete full-size panel template. The template can be ordered from parts - WD02X29298.

IMPORTANT: TO ENSURE OPTIMUM DOOR BALANCE PERFORMANCE, THE CUSTOM PANEL MUST NOT WEIGH MORE THAN 17.6 LBS.

A custom handle must be installed onto the custom panel.

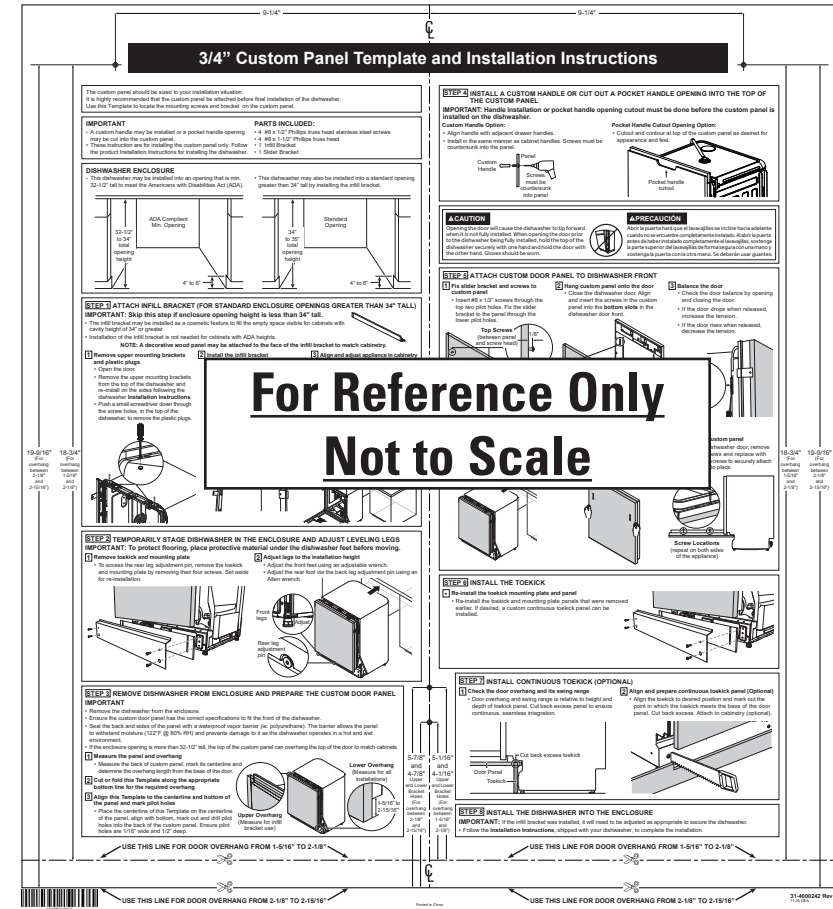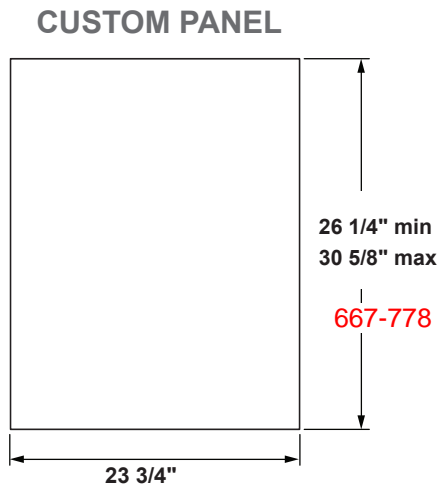

For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.