


Miele 24" Dishwasher  
#G 4993 SCVi

INSTALLATION SPECIFICATIONS

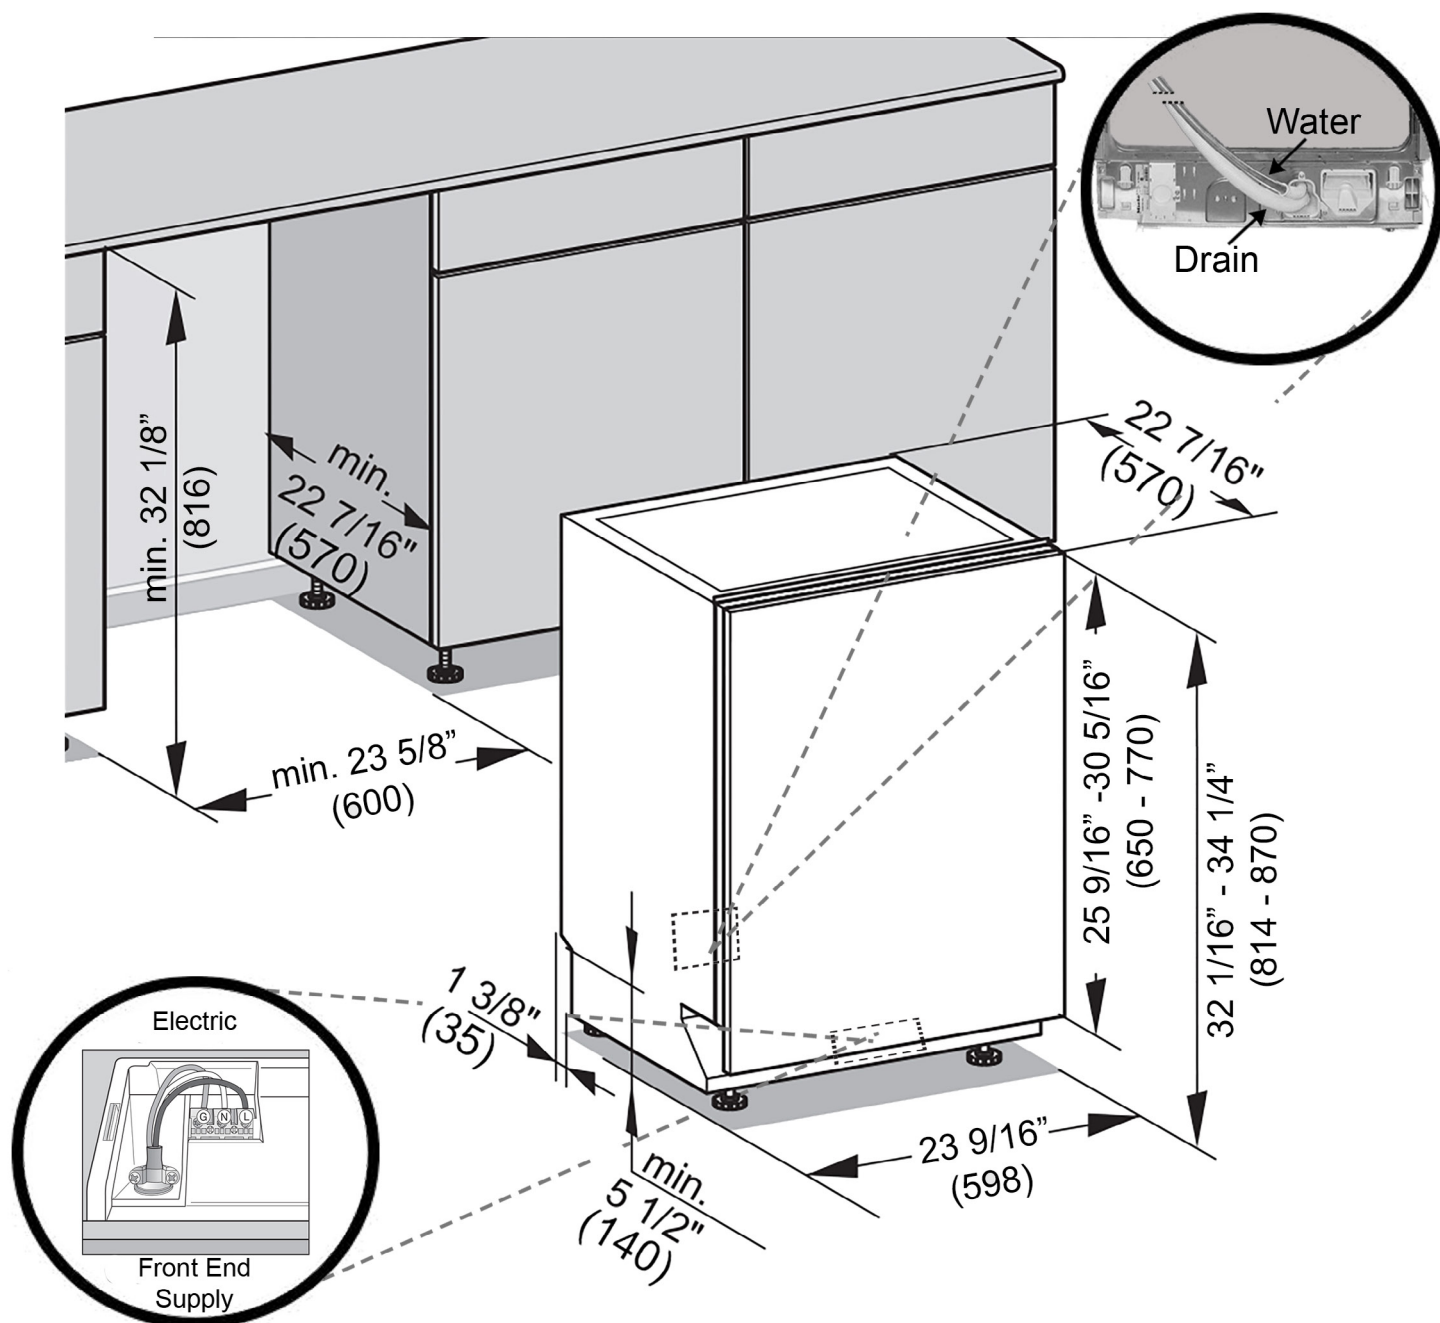


- Drain -** 4 ft 11 in (1.5 m) flexible drain hose.  
(Connects from lower center rear)
- Water -** 4 ft 11 in (1.5 m) flexible water intake hose with  $\frac{3}{8}"$  compression fitting.  
(Connects from lower center rear)
- Electric -** 4 ft 11 in (1.5 m) 120V 15 A 3 wire molded NEMA 5-15 plug power supply.  
(Connects via Front End Supply or may be hardwired)

## PRODUCT SPECIFICATIONS


Model	SO30PM/S/PH
Dimensions	29 7/8"W x 28 1/2"H x 23"D
Oven 1 Interior Dimensions	25 1/4"W x 17 1/2"H x 19 7/8"D
Overall Capacity	5.1 cu. ft.
Usable Capacity	3.3 cu. ft.
Door Clearance	21 3/8"
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	30 amp dedicated circuit
Conduit Length	4 Feet

## ELECTRICAL




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified


## DIMENSIONS

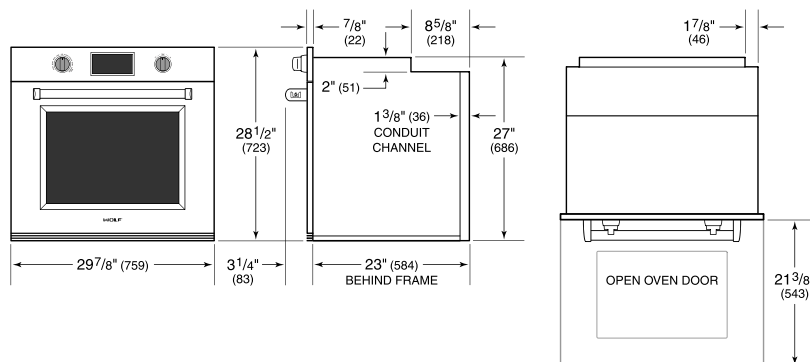


## STANDARD INSTALLATION

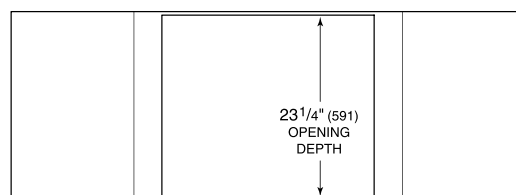

TOP VIEW

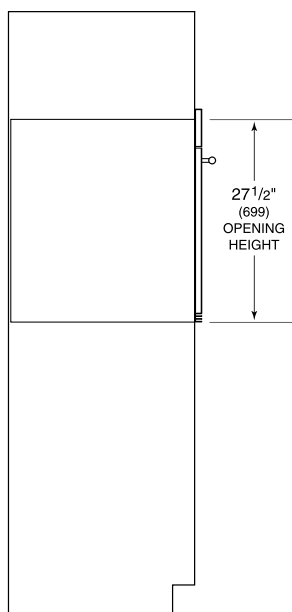

SIDE VIEW

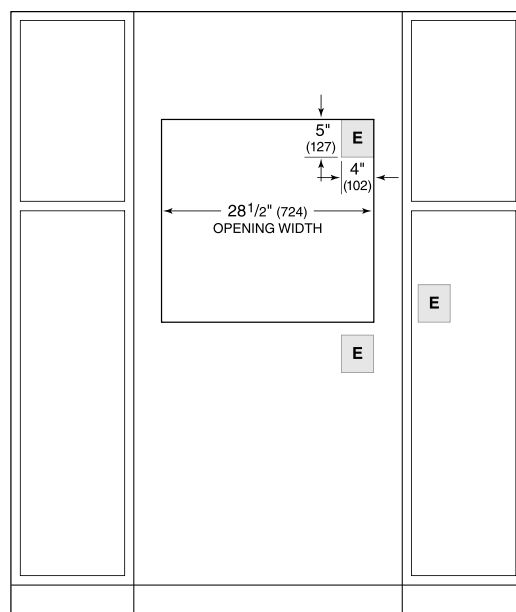


FRONT VIEW

**NOTE:** Location of electrical supply within opening may require additional cabinet depth.

## PRODUCT SPECIFICATIONS


Model	SPO30PM/S/PH
Dimensions	29 7/8"W x 17 7/8"H x 21 1/2"D
Capacity	1.6 cu. ft.
Door Clearance	14 3/16"
Weight	82 lbs
Electrical Supply	grounded, 240/208 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Power Cord Length	6 Feet
Receptacle	NEMA 6-20R grounding type

## ELECTRICAL




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

## DIMENSIONS

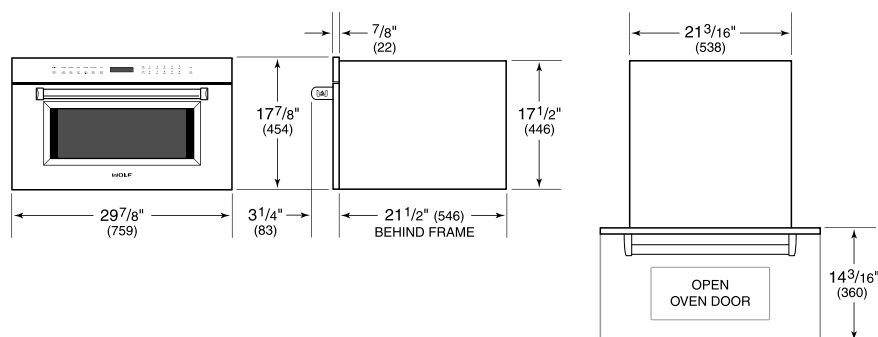

## STANDARD INSTALLATION

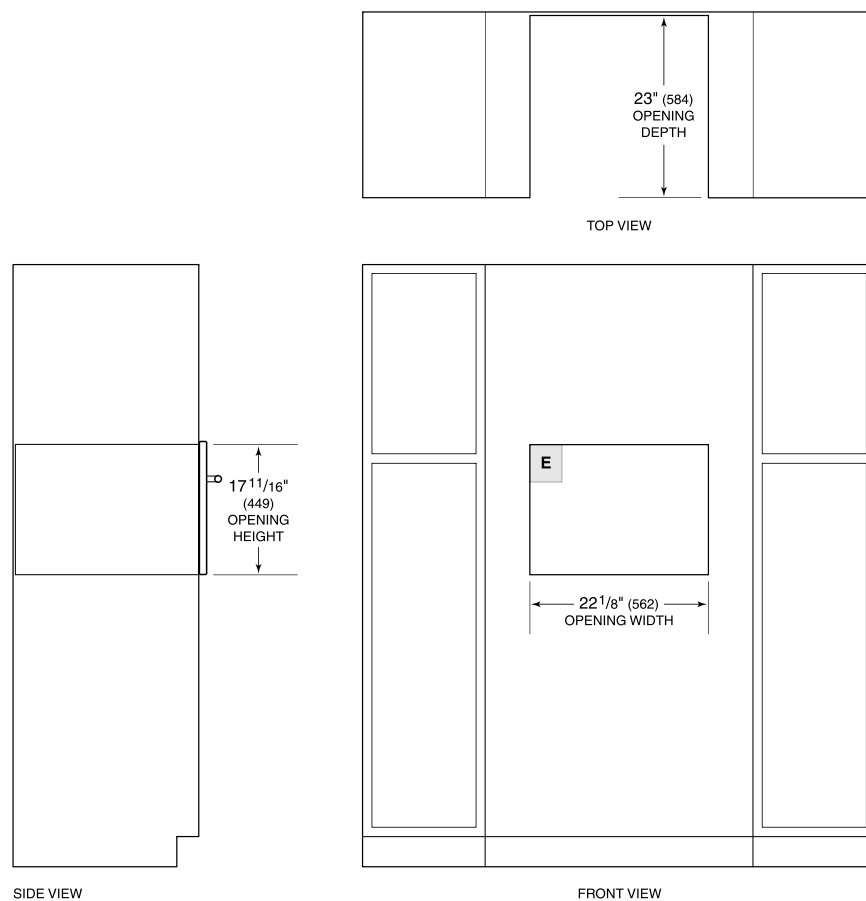




**NOTE:** 24" (610) and 30" (762) models require the same opening dimensions.

#RS36W8ORJ1 N

FISHER & PAYKEL

DATA SHEET  
36" ActiveSmart Built-In Fridge

0 100 200 400  
millimetres

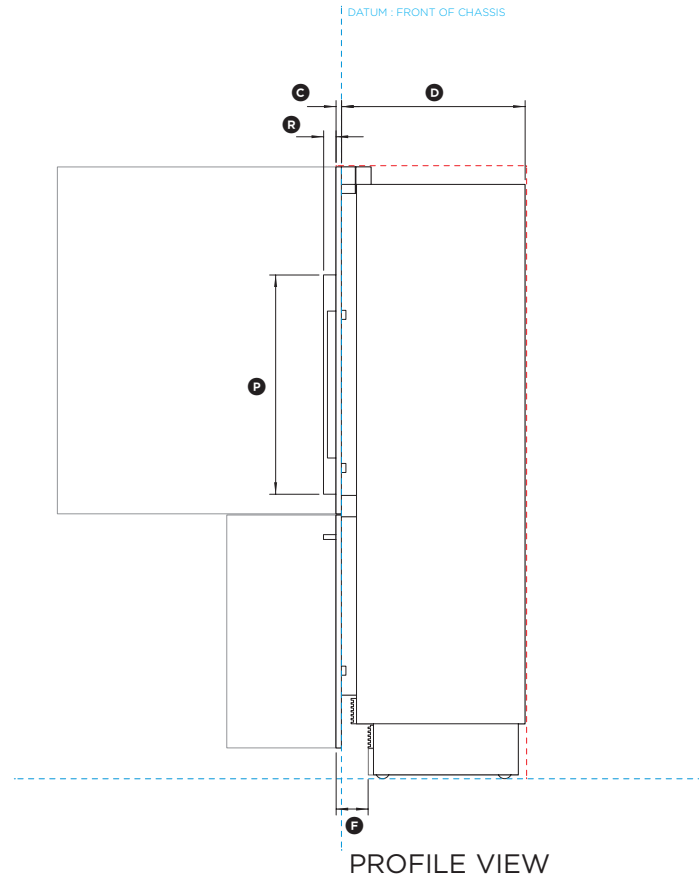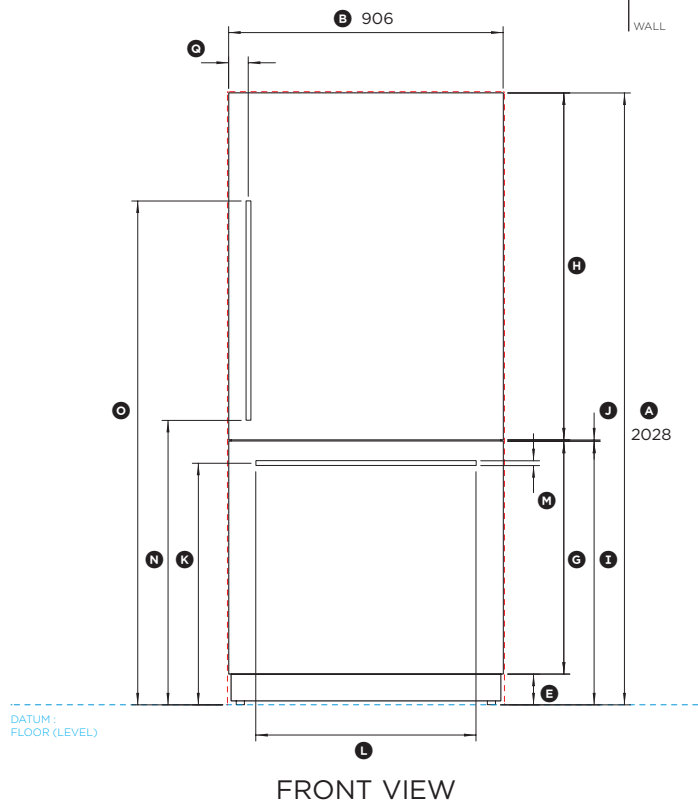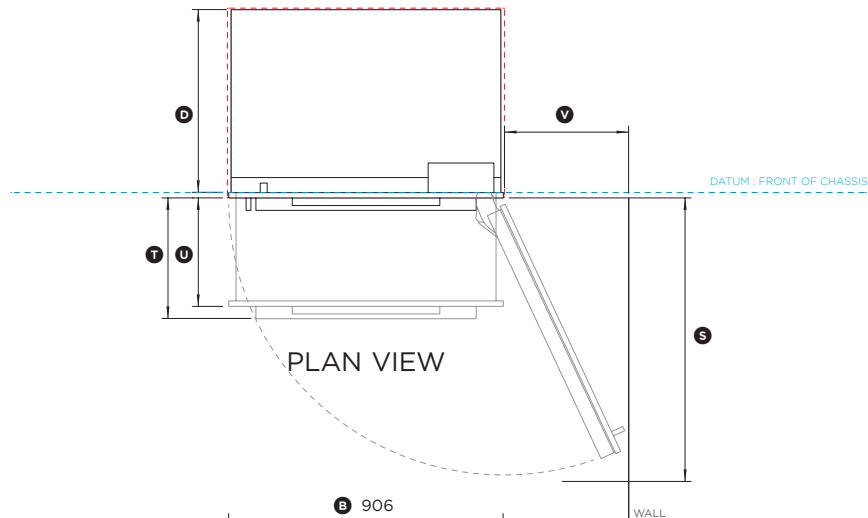

Model no:

**RS36W8ORJ1** (with Stainless Door panels PART NO. RD3680R)

**RS36W80LJ1** (with Stainless Door panels PART NO. RD3680L)

Note: Left hand hinge model is a mirrored version of image shown.  
(refer page 1 for imperial measurements)

Product Dimensions	mm
Ⓐ Overall height of fridge	2028
Ⓑ Overall width of fridge	906
Ⓒ Depth of fridge front panels (excl. handles)	19
Ⓓ Overall depth of fridge (excl. front door panels)	606
Ⓔ Height from bottom datum to top of toekick	102
Ⓕ Depth of toekick measured from front of door	71 - 101
Ⓖ Height of bottom drawer panel	772
Ⓗ Height of top door panels	1150
Ⓘ Height from bottom datum to top of drawer panel	874
Ⓢ Gap between top and bottom door panels	4
Ⓚ Height from bottom datum to centre of bottom handle	801
Ⓛ Width of bottom handle	727
Ⓜ Thickness of handles	16
Ⓝ Height from bottom datum to bottom of top handle	943
Ⓟ Height from bottom datum to top of top handle	1670
Ⓟ Height of top handle	727
Ⓡ Distance from side of fridge to the centre of top handle	65
Ⓢ Depth of handle (measured from front of door)	41
Ⓣ Depth of door (widest opening) measured from front of door	940
Ⓤ Depth of drawer (open) measured from front of drawer, including handle	400
Ⓡ Depth of drawer (open) measured from front of drawer, excluding handle	360
Ⓡ Minimum door clearance to adjacent wall (115° - full internal access)	410


Clearance Dimensions	mm
Minimum cabinetry gap clearance from edge of product	4
Overall height of cavity	2032
Overall width of cavity	914
Overall minimum depth of cavity	629

INDICATES CABINETRY / PRODUCT DATUM - - - - -  
INDICATES CABINETRY CLEARANCES - - - - -

DATE: 05.05.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

### INSTALLATION DIMENSIONS

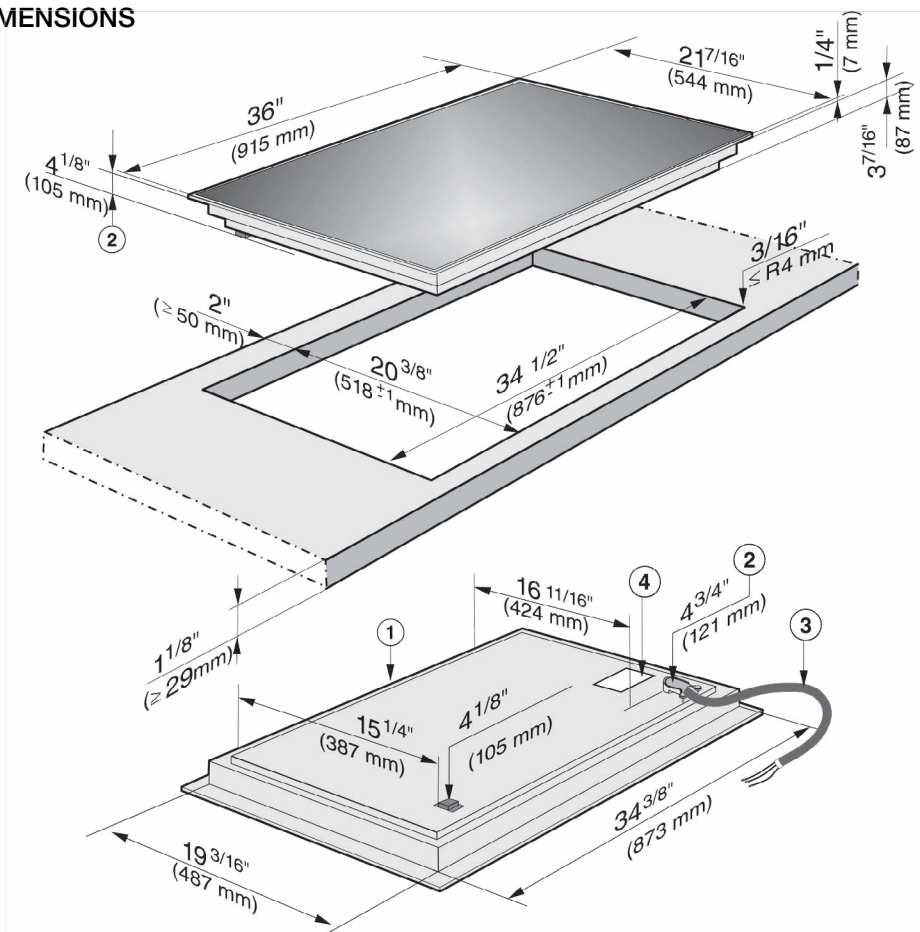

① Front

② Installation height

③ Flexible metal hose with power cord L = 3' 11 1/4" (1200 mm)


④ Data plate

# 36" Induction Cooktop KM 6370



## INSTALLATION

### Ventilations

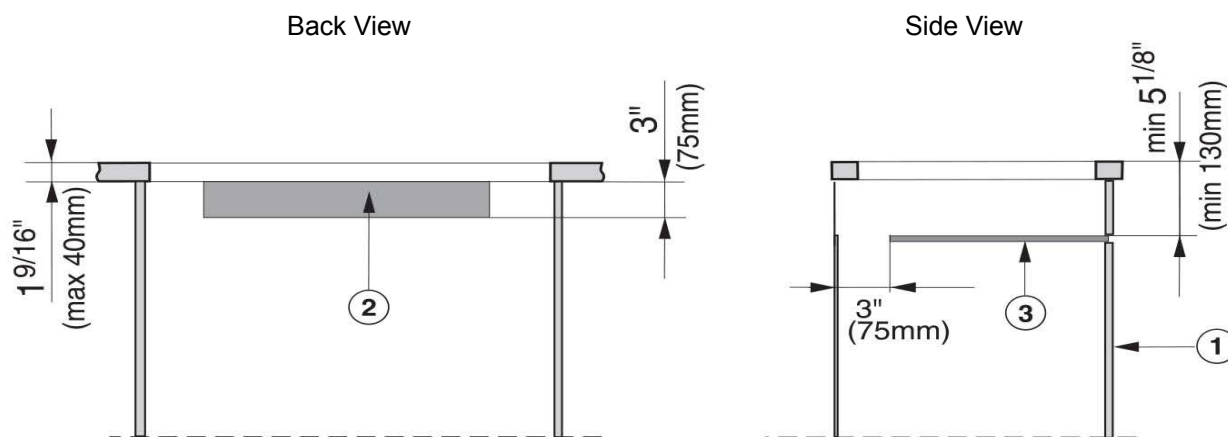

① Front of cooktop

② Cut-out in cabinet for ventilation.

Shown as an example in the rear wall of the cabinet.

③ Protective base

Installation of a protective base under the cooktop is allowed but not required.

If a protective base is fitted, there must be a clearance of at least 5 1/8" (130 mm) between the top of the protective base and the top of the countertop, for proper ventilation of the cooktop.

At the back there has to be a gap of 3" (75 mm) for the power cord.

Cooktop	Measurements cut-out
KM 6370 / KM 6375	90 sq-in. Example: 30" x 3" (762 x 75mm)