36-INCH BUILT-IN 2-DOOR BOTTOM FREEZER




FREEDOM® COLLECTION, PANEL-READY


WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System**; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System**; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

^{**}Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

CUTOUT DIMENSIONS

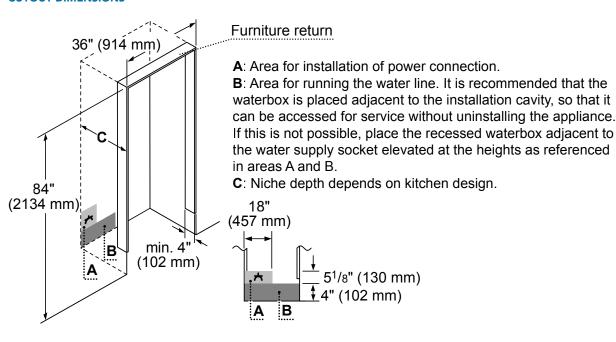


TOP VIEW CLEARANCE



** Door handle must be added to this dimension

Depends on the thickness of the furniture door.
 3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).



Page 2 of 3 09 / 17


T36IB900SP

36-INCH BUILT-IN 2-DOOR BOTTOM FREEZER





PANEL DIMENSIONS

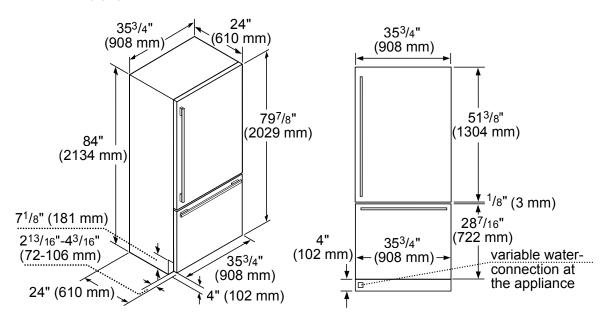

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS



TFL36IB800 36-Inch 2-Door Flat Stainless Steel Door Panel

STORAGE



36HFGALBIN 36-Inch Half Gallon Bin



ICEBUCKETL Large Ice Bucket



LPRODBIN10 Large Produce Bin



36PRODRAIL
36-Inch Produce Railing

HANDLES

NOTE: Choose one handle for each column, choose 2 handles for each 2-door bottom freezer and choose 3 handles for each French Door bottom freezer.

PR36HNDL20

36-Inch Professional Series Handle

PR30HNDL20

30-Inch Professional Series Handle

MS36HNDL20

36-Inch Masterpiece® Series Handle MS30HNDL20

30-Inch Masterpiece® Series Handle

PR36HNDL10

36-Inch Professional Series Classic Handle PR30HNDL10

30-Inch Professional Series Classic Handle

MS36HNDL10

36-Inch Masterpiece® Series Classic Handle MS30HNDL10

30-Inch Masterpiece® Series Classic Handle

REPLFLTR10 FREEDOM® WATER FILTER

Replacement water filter for use in all freezer and bottom freezer models

HEATRKIT10 AND HEATRKIT20 FREEDOM® HEATER KIT

For installations where two appliances are installed side-by-side or instances where any appliances are installed less than 6" apart from another but not connected. The heater kit is also recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall. HEATERKIT20 offers improved energy efficiency when compared to HEATRKIT10.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.


Page 3 of 3 09 / 17


MEDMC301WS 30-INCH DOUBLE COMBINATION BUILT-IN OVEN WITH SPEED OVEN



MASTERPIECE® SERIES

30-INCH DOUBLE COMBINATION OVEN WITH SPEED OVEN

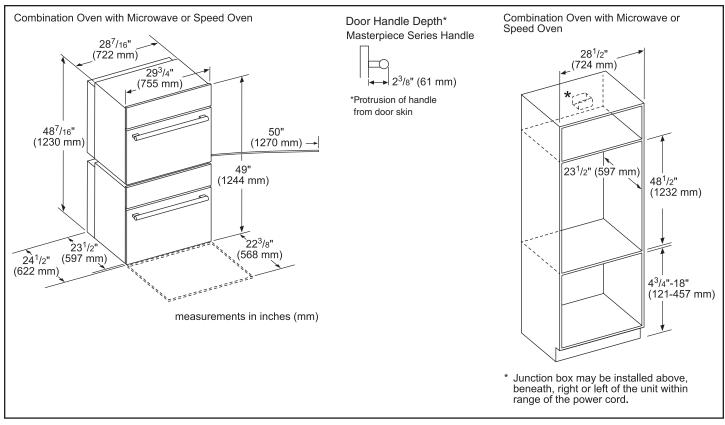

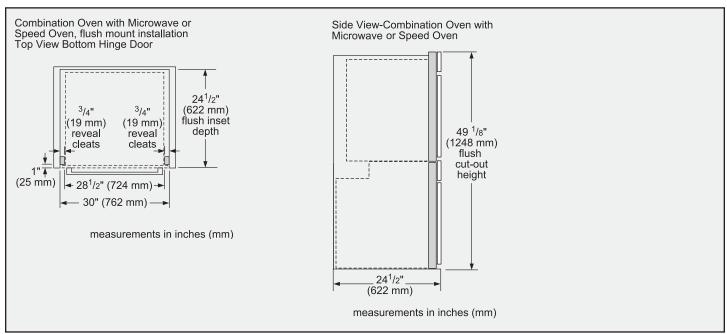


Page 2 of 3 07 / 18

24" Custom Panel Dishwasher

800 Series DLX - Custom Panel SHV878ZD3N



Installation Details

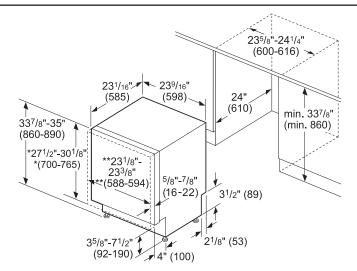



 * measured from the bottom edge of the countertop panel thickness recommended 3/4" (20 mm).


This dishwasher can accept custom door panel weights ranging from 7 to 24 lbs; however, the dishwasher comes from the factory ready for custom panel door weights from 11 to 18 lbs. If you plan on using a door panel that is not 11 to 18 lbs. please contact customer service at (800) 944-2904.


** 24" (610 mm) wide panel may be used depending on cabinet design

Note: Refer to installation template for mounting hardware locations measurements in inches (mm)

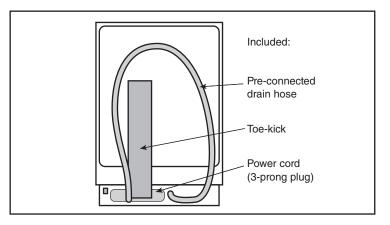

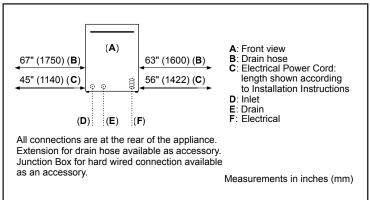

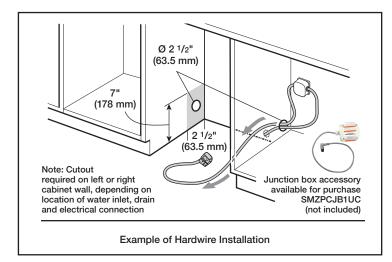

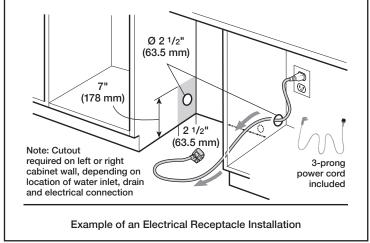

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

INSTALLATION OPTIONS

INSTALLATION ABOVE A BUILT-IN OVEN OR WARMING DRAWER

Thermador Induction Cooktops may be installed above a Thermador Single Built-in Oven. A minimum 1" air gap must be maintained between the bottom of the cooktop and the top of the oven.

Thermador Cooktops may also be installed above a Thermador Warming Drawer to create a convenient cooking center. Refer to the warming drawer section for additional specifications.

IMPORTANT

We strongly recommend the installation of a Thermador Ventilation System with this induction cooktop.

Seal the surfaces of the cutout to make them heat resistant. This prevents the surfaces from expanding as a result of humidity.


Solid surface countertops often require special installation. For example, heat reflective tape or rounded corners may be necessary. Contact the countertop manufacturer for instructions specific to your countertop.

WARNING

To reduce the risk of ignition of nearby combustible materials, install the countertop with a minimum distance of 2" (51 mm) from both side walls and the back wall.


HEAT SHIELD

The heat shield will require an additional 1" clearance below the cooktop. For safety reasons, the heat shield must be properly installed. This prevents components from overheating as a result of the recirculation of hot air from the cooktop. The heat shield is the same width as the cooktop. For shipping, it is screwed to the burner box. Once installed, the heat shield will be able to rotate freely, as shown in the illustration. Refer to the instructions packed with product for installation details.



36-INCH COOKTOP AND CUTOUT DIMENSIONS

NOTE: The work surface should be d level. The stability of ap should be confirmed aking the cutout.



Minimum distance from cutout to the wall
 Recessed depth (includes 1° air clearance)

Measurements in inches (mm in brackets)

INSTALLATION ABOVE A THERMADOR BUILT-IN OVEN

Heat shield: Self positioning = 2 3/8" length, Minimum required air clearance: 1" (26mm) 31/8° 43/16" (102mm) (106mm) COUNTERTOR 63/4 COOKTOP SUME 11/16 23/4 (27 mm) 36" 281/4" OVEN (914mm) 291/16" 247/16" (738 mm) 271/16" (687 mm) \$43/4" TOE KICK #(121mm)

Note: Dimensions based on standard countertop height (36" with $4 \, \text{$^{\prime\prime}$}$ to ekick including base plate).

The built-in oven can be installed below the induction cooktop as long as there is an air clearance of 1" between the bottom of the cooktop and the top of the oven.

Sump applies to 30-inch Wall Ovens only.