

G 7591 SCVi

24" Fully Integrated Dishwasher, K2o (ADA)

Features:

- AutoDos - an integrated automatic detergent dispensing system
- DirectSensor Controls - intuitive touch controls
- QuickIntenseWash - a full wash and dry cycle in 58 minutes
- 40 dBa (38 dBa when using ExtraQuiet)
- 3D MultiFlex Cutlery Tray
- WifiConn@ct
- Panel-Ready
- Knock2Open
- Water Softener
- ADA Compliant
- EnergyStar


MATERIAL

11388260




SPECIFICATIONS	
Overall Unit Dimensions	23 ⁹ / ₁₆ " (598 mm) W x 32 ¹ / ₁₆ " - 34 ¹ / ₄ " (814 - 870 mm) H x 22 ⁷ / ₁₆ " (570 mm) D [Depth does not include door panel]
Niche	
Minimum Cabinet Niche Opening	23 ⁵ / ₈ " (600 mm) W x 32 ¹ / ₈ " (814 mm) H x 22 ⁷ / ₁₆ " (570 mm) D
Plumbing	
Water Supply Requirements	<ul style="list-style-type: none"> • Cold or Hot (max 150°F/65°C) water connection • Male 3/8" compression fitting • Water pressure range 7.25 psi (0.5 bar) and 145 psi (10 bar)
Water Connection Line (Supplied)	Length: 5 ft (1.5 m) Female 3/8" compression.
Drain Hose (Supplied)	Length: 5 ft (1.5 m) 7/8" (22 mm) internal diameter
Electrical	
Electrical Requirements	110V / 120V, 60Hz, 15 Amps
Power Cord (Convertible to hardwire)	NEMA 5-15 plug, 5 ft (1.52 m)
Shipping	
Shipping Weight	121 lbs (55 kg)
Shipping Dimensions	27 ¹ / ₈ " W x 38 ¹ / ₈ " H x 26 ³ / ₈ " D


PRODUCT DIMENSIONS

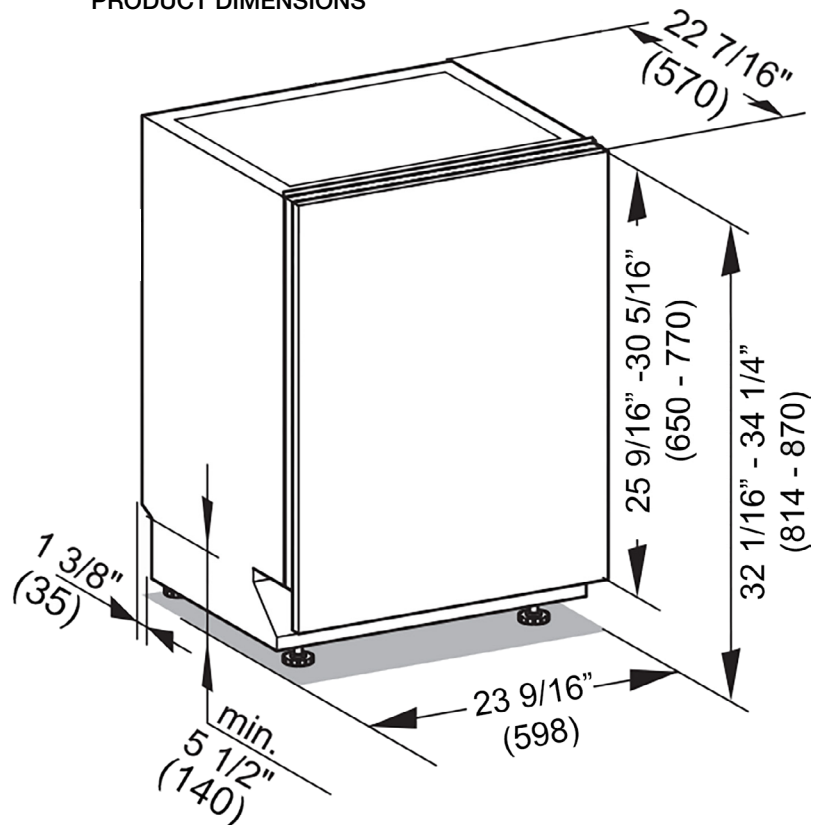

CUTOUT DIMENSIONS

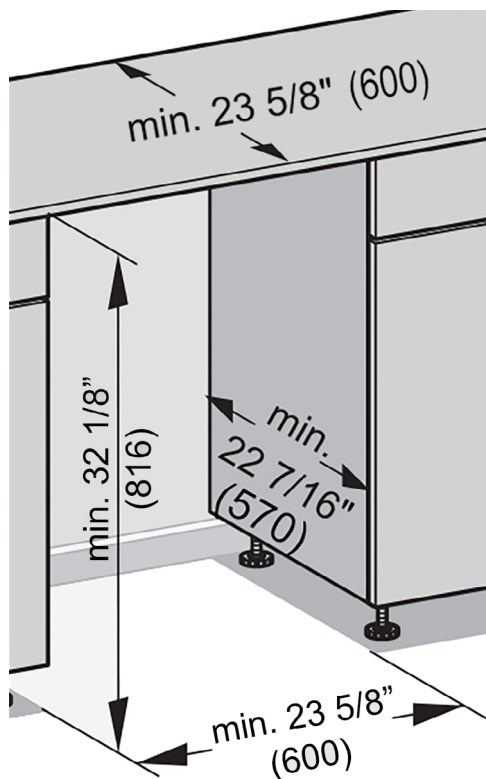

CUSTOM PANEL

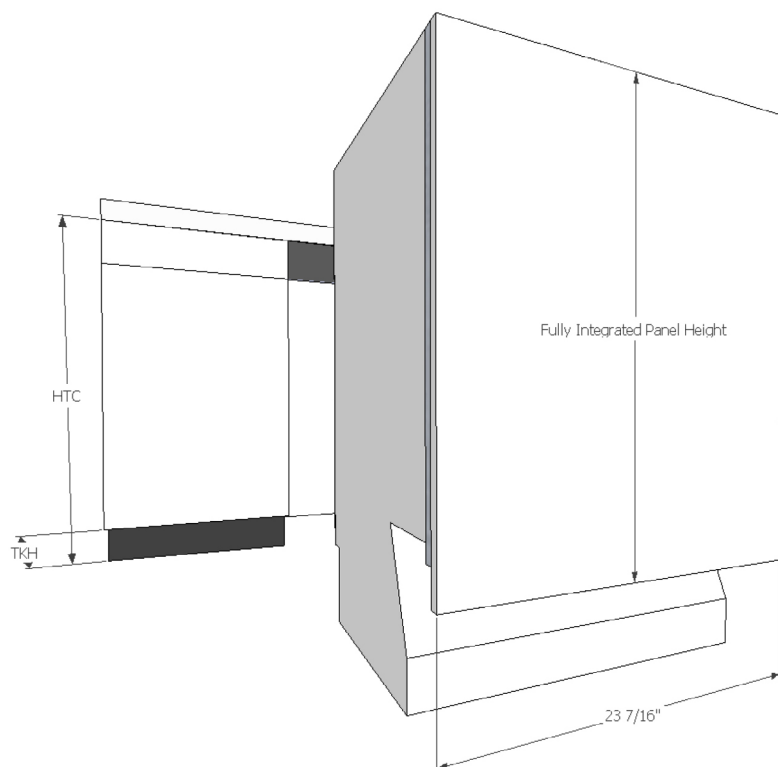

Width: 23 7/16" (598 mm) in all cases

Thickness: 3/4" (19 mm) in all cases

Height: Determined using the following calculation:

$$\text{Panel Height} = \text{HTC} - \text{TKH}$$

HTC = Height to the underside of countertop

TKH = Toe kick height

Note: Control panel is along the top edge of the unit. It is not visible when the unit is closed. A handle **MUST** be located on the front panel in order to open the unit.

Maximum panel height: 30 3/8" (772 mm)

Minimum panel height: 25 5/8" (650 mm)


Maximum panel weight: 26 lbs (12 kg)

PRODUCT SPECIFICATIONS

Elkay Crosstown® 16 Gauge Workstation Stainless Steel, 31-1/2" x 18-1/2" x 9" Equal Double Bowl Sink Kit with Aqua Divide. Sink is manufactured from 16 gauge 304 Stainless Steel with a Polished Satin finish, Full spray sides and bottom with Sides and Bottom pads.

Installation Type:	Sink Kits, Undermount
Material:	304 Stainless Steel
Special Features:	Workstation
Finish:	Polished Satin
Gauge:	16
Sound Deadening:	Full spray sides and bottom with Sides and Bottom pads
Number of Bowls:	2
Sink Dimensions:	31-1/2" x 18-1/2" x 9"
Bowl 1 Dimensions:	14-5/16" x 17" x 9"
Bowl 2 Dimensions:	14-5/16" x 17" x 9"
Drain Size:	3-1/2" (89mm)
Minimum Cabinet Size:	36"
Mounting Hardware:	Part # 54300308 included
Template Included:	Yes
Cutout Template #:	1000005511

Template is available for download at [elkay.com](#). CAD software will be required to open the template.




Included with Product: Two CTXBG1314 bottom grids, LKC0717SS colander, LKCB1217AC Cutting Board, LKDR1317RU drying rack, LKDR0717SS drying rack, two LKDD drains

AMERICAN PRIDE. A LIFETIME TRADITION.

Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.

Product Compliance: ASME A112.19.3/CSA B45.4
Accessory: ASME A112.18.2/CSA B125.2

Installation Profile:

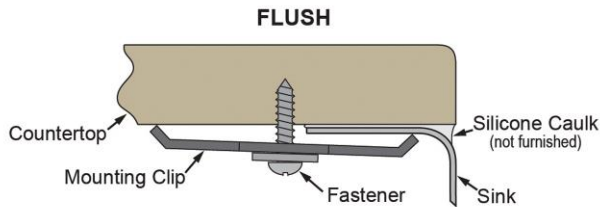


Designed to affix to the underside of any solid surface countertop.



Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.

[Clean and Care Manual \(PDF\)](#)
[Installation Instructions \(PDF\) - 1000005239](#)
[Installation Instructions \(PDF\) - 1000005235_drain](#)
[Installation Instructions \(PDF\) - Warranty \(PDF\)](#)

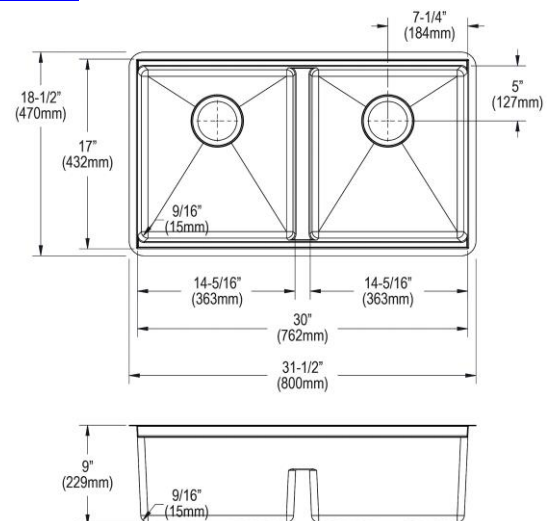

PART: _____ QTY: _____
PROJECT: _____
CONTACT: _____
DATE: _____
NOTES: _____
APPROVAL: _____


In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](#) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Fully Integrated 36" MasterCool

#KF2982Vi

CUTOUT DIMENSIONS

- Niche depth assumes a 3/4" (19 mm) panel, please adjust according to custom panel thickness

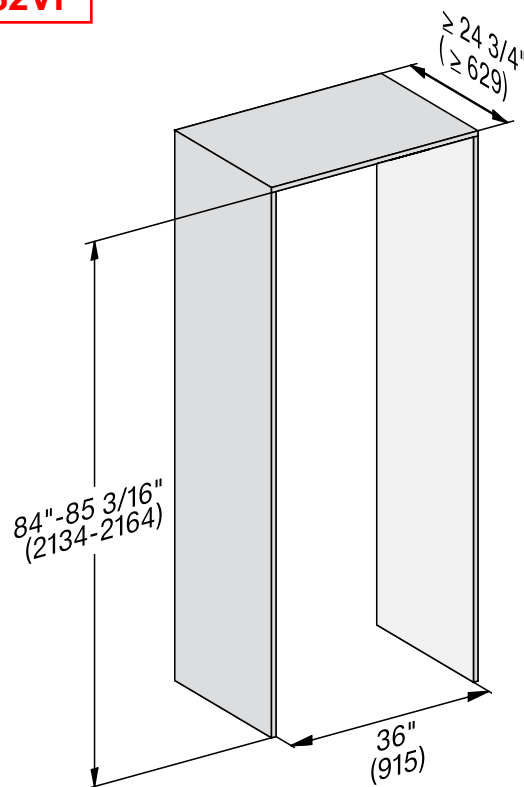

CUTOUT DETAILS


- The electrical connection must not be positioned higher than 9" (228.6 mm) above the floor.

For All Freezers and Bottom Mount units only:

- The 1/4" (6.4 mm) plumbed water connection should not be positioned higher than 2" (50.8 mm) above the floor.

Notes:

In case of an emergency the electrical outlet and water shutoff must be easily accessible and must not be concealed behind the appliance.

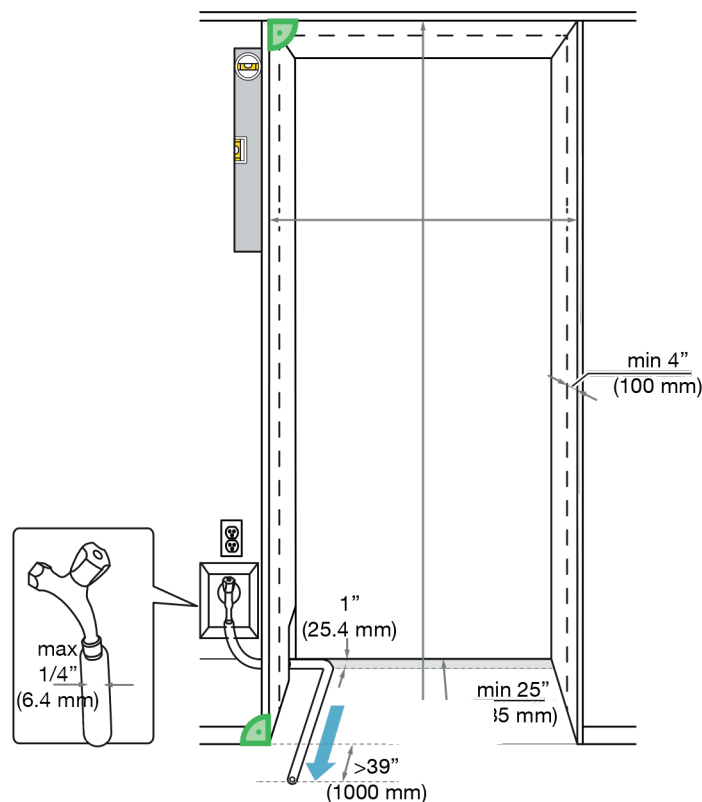


Fully Integrated 36" MasterCool

ELECTRICAL AND WATER CONNECTION

(Water Connection For F 29x2 Vi & KF 29x2 Vi Only)


Rear View

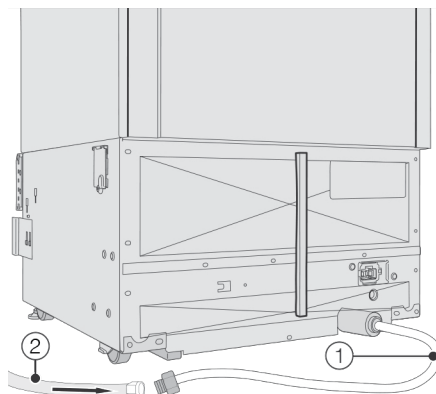

Water Connection:

- 1/4" water line is required
- Located at the rear of the appliance on a 4' 11" line.
- 1/4" compression fitting, ready to accept 1/4" line.

Side View

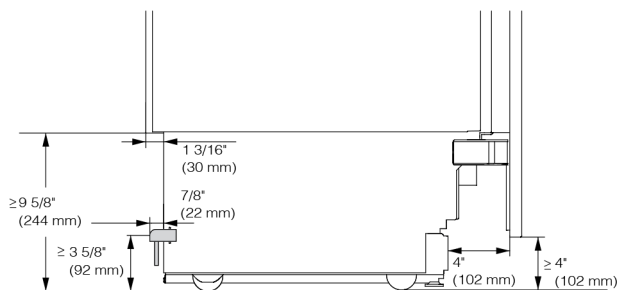

Notes:


- In case of an emergency the electrical outlet and water shutoff must be easily accessible and must not be concealed behind the appliance.
- In the event that connection points are located behind the unit the electrical outlet and water connection should be located no higher than 9 5/8" from the floor.

Fully Integrated 36" MasterCool

CUSTOM PANEL DETAILS

For Models:

- F 2902 Vi • F 2912 Vi
- K 2902 Vi • K 2912 Vi

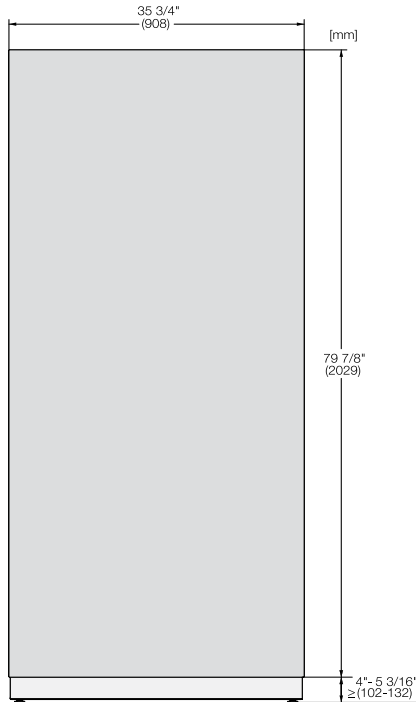


Max. Panel Weight:
F 29x2 Vi - 68;bs
K 29x2 Vi - 106 lbs

Optional Accessory:
Clean Touch Steel Panel:
• KFP 3605
Material# 11499100

For Models:

- KF 2902 Vi • KF 2912 Vi

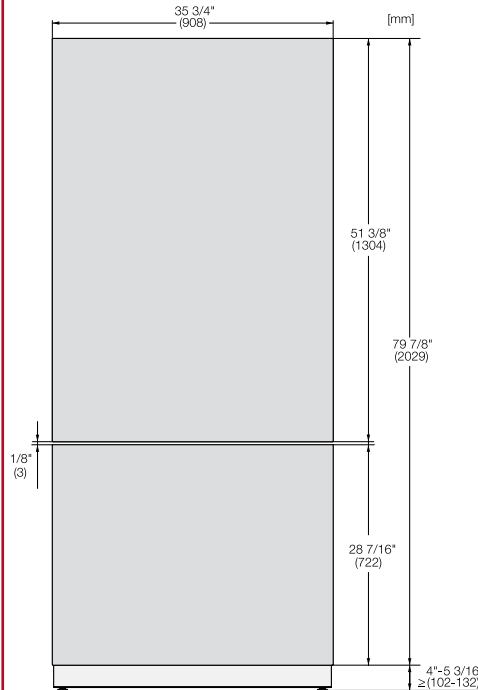


Max. Top Panel Weight:86 lbs
Max. Bottom Panel Weight: 19 lbs

Optional Accessory:
Clean Touch Steel Panel:
• KFP 3615 - Top Panel
Material# 11499140
• KFP 3625 - Bottom Panel
Material# 11499150

For Models:

- KF 2982 Vi

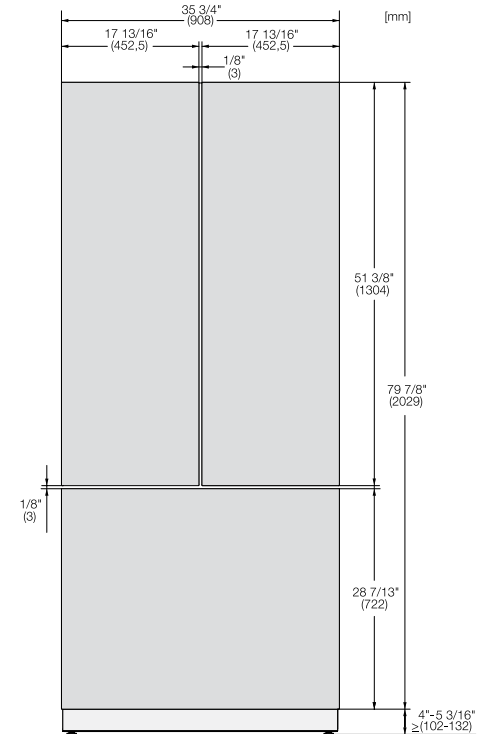


Max. Top Panel Weight (x2):150 lbs
Max. Bottom Panel Weight: 19 lbs

Optional Accessory:
Clean Touch Steel Panel:
• KFP 3635 - Top Panel
Material# 11499420
• KFP 3625 - Bottom Panel
Material# 11499150

Panel Notes

*If the adjoining cabinets are taller than the height of machine (HOM) - the front panel may be extended accordingly.
Simply maintain the toekick height and extend the panel the needed distance.*

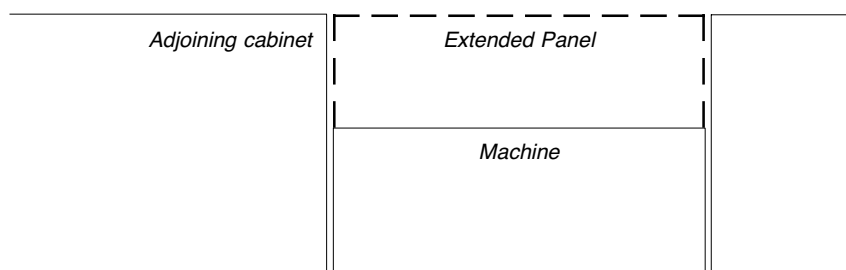


Fully Integrated 36" MasterCool


HINGING DETAILS 115° OPENING

Available for the following models:


- K 29x2 Vi
- F 29x2 Vi
- KF 29x2 Vi

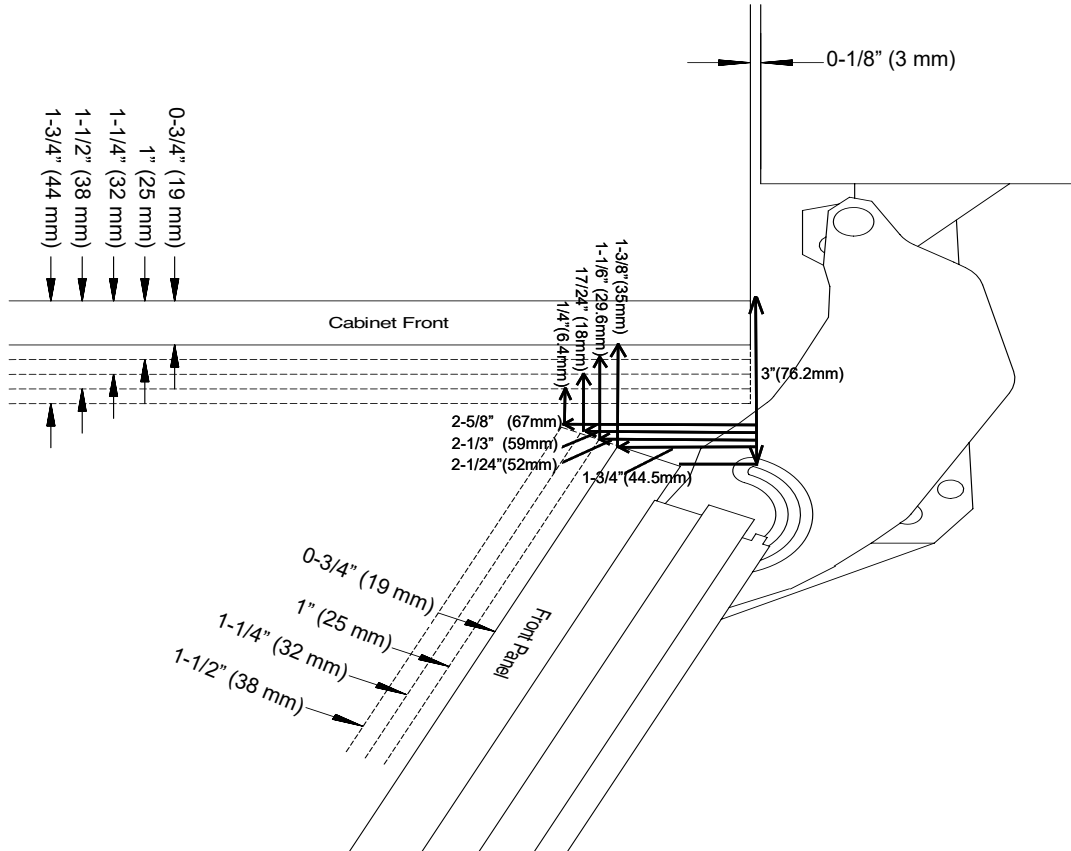

Top View)
(K 29x2 Vi, F 29x2 Vi, KF 29x2 Vi)

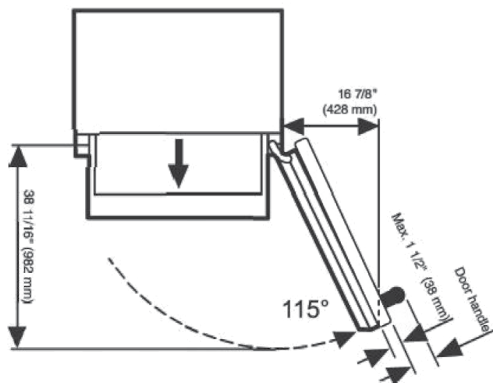

Top View
(KF 2982 Vi)


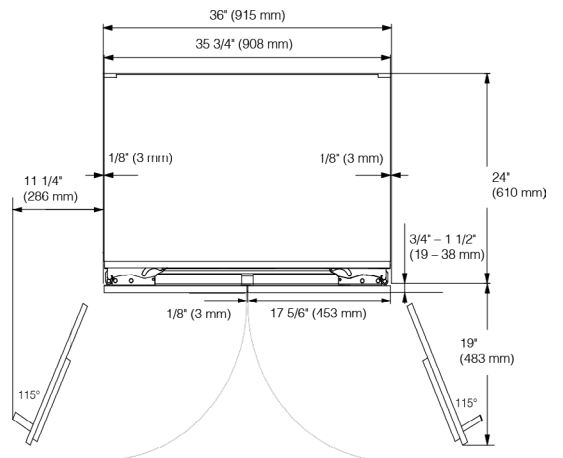


Fully Integrated 36" MasterCool


HINGING DETAILS 90° OPENING

Available for the following models:


- K 29x2 Vi
- KF 29x2 Vi

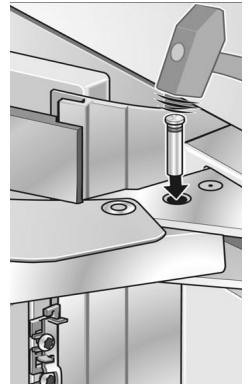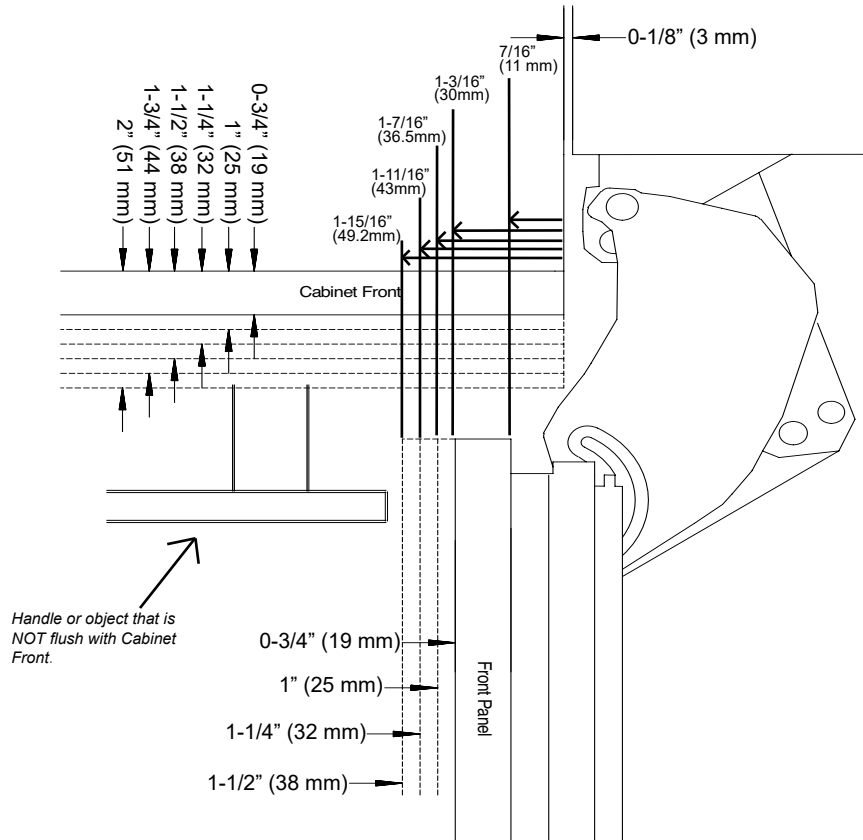

Top View
(K 29x2 Vi, KF 29x2 Vi)

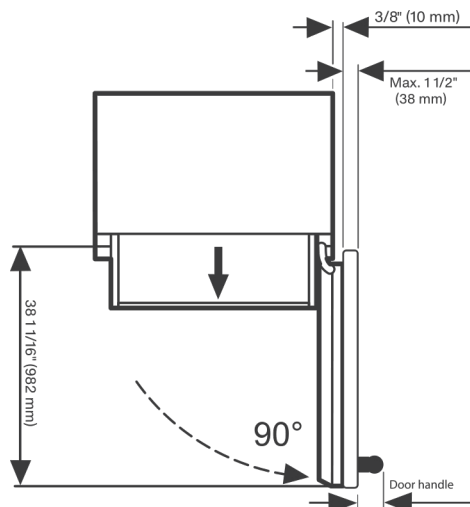

Top View
(KF 2982 Vi)

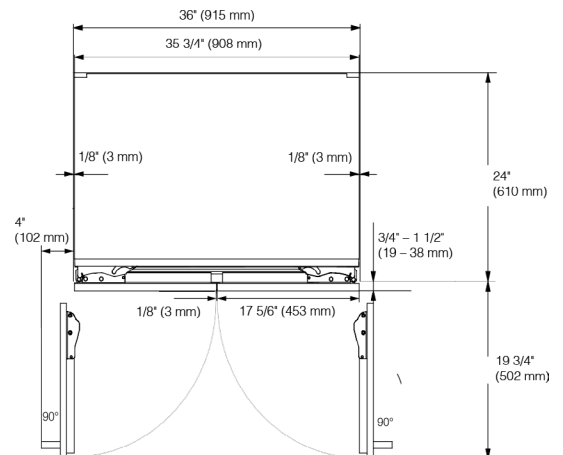


Freezer units cannot be stop pinned at 90°

24" Speed Oven - Flush Installation

#H6600BM

PRODUCT DIMENSIONS

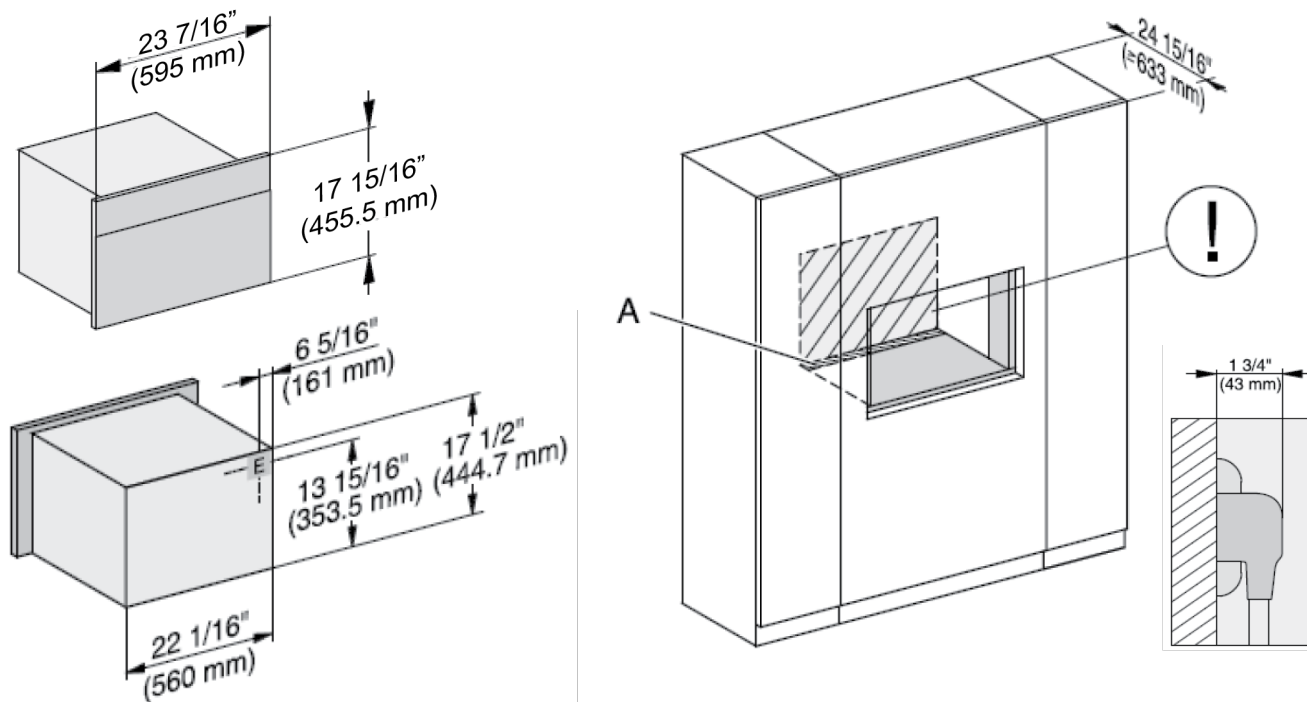


A - Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation

- ! - Electrical and water supplies are recommended to be placed in adjacent cabinetry.
Additional cabinet depth is required when placing the electrical and water supplies behind the appliance.

E = Electric connection

FLUSH INSTALLATION

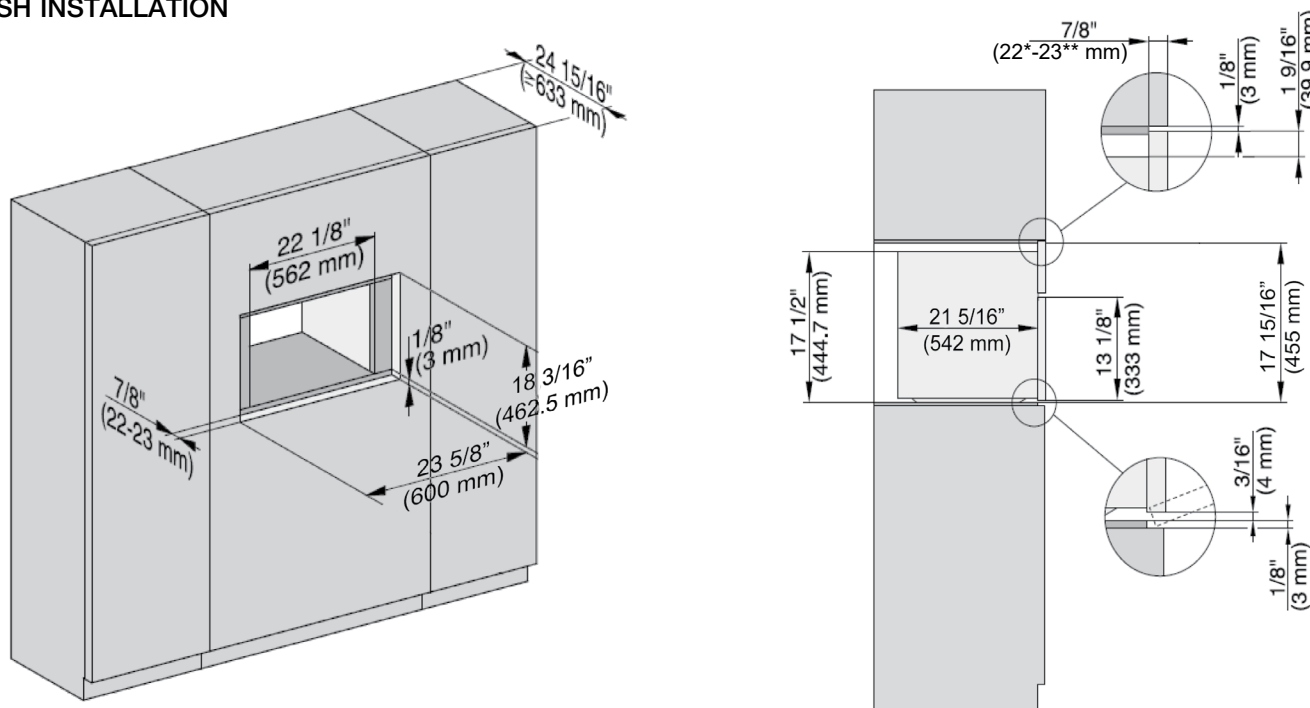


* Oven with glass
** Oven with metal

24" Speed Oven - Proud Installation

PRODUCT DIMENSIONS

#H6600BM

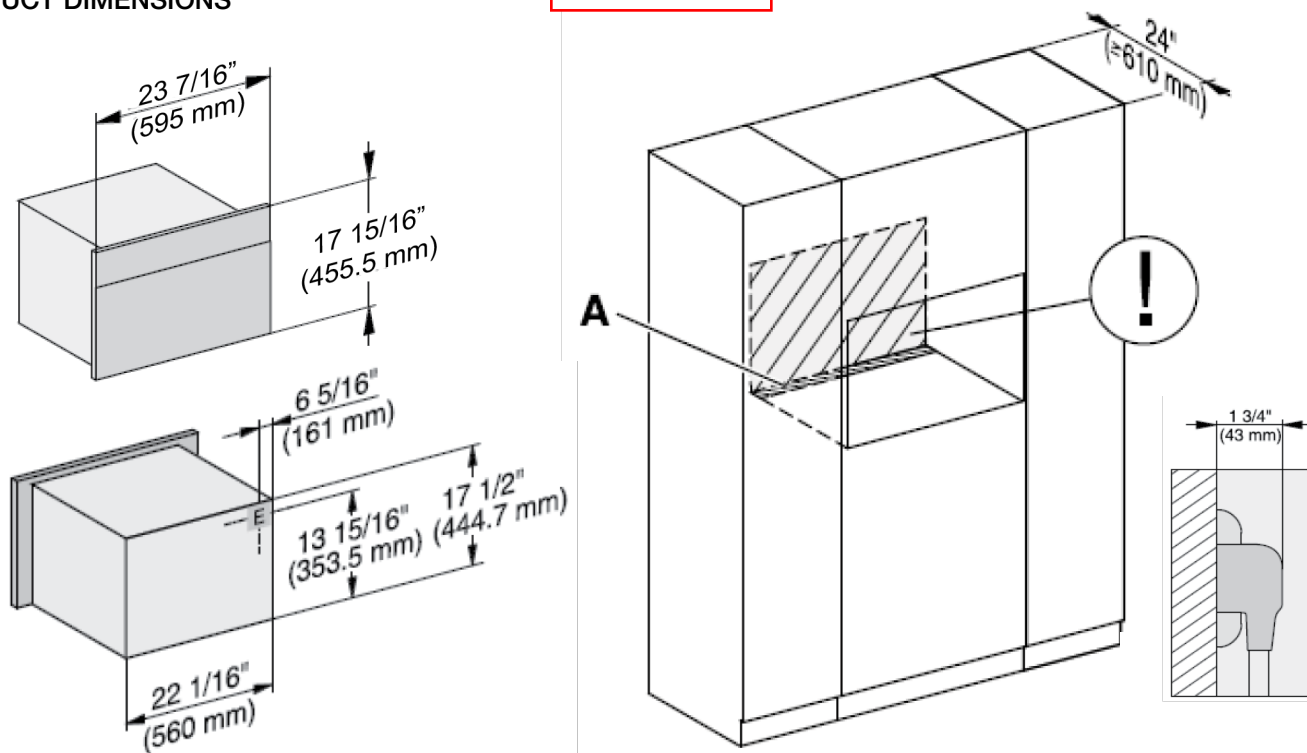


A - Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation

- ! - Electrical and water supplies are recommended to be placed in adjacent cabinetry.
Additional cabinet depth is required when placing the electrical and water supplies behind the appliance.

E = Electric connection

PROUD INSTALLATION

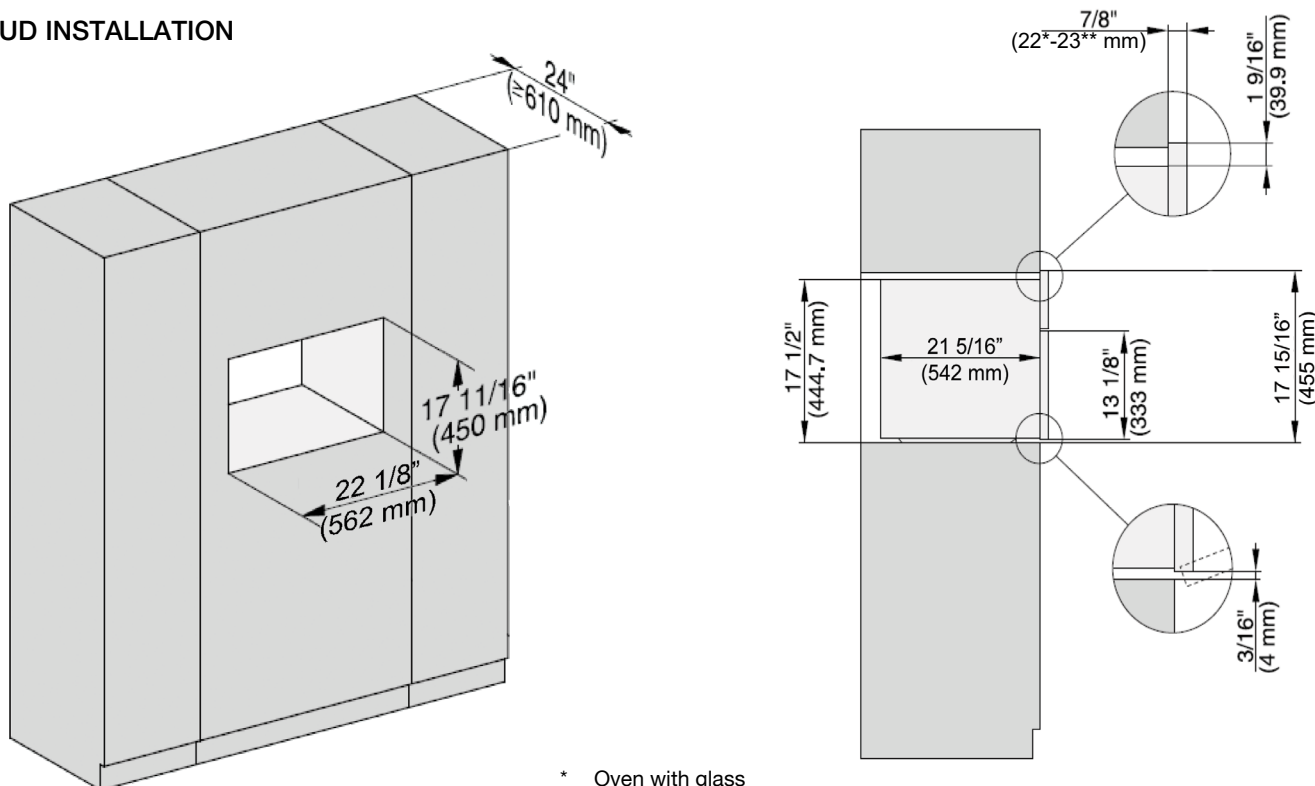

* Oven with glass
** Oven with metal


PureLine 30" Convection Oven

H 6680 BP




PRODUCT VIEWS

Isometric

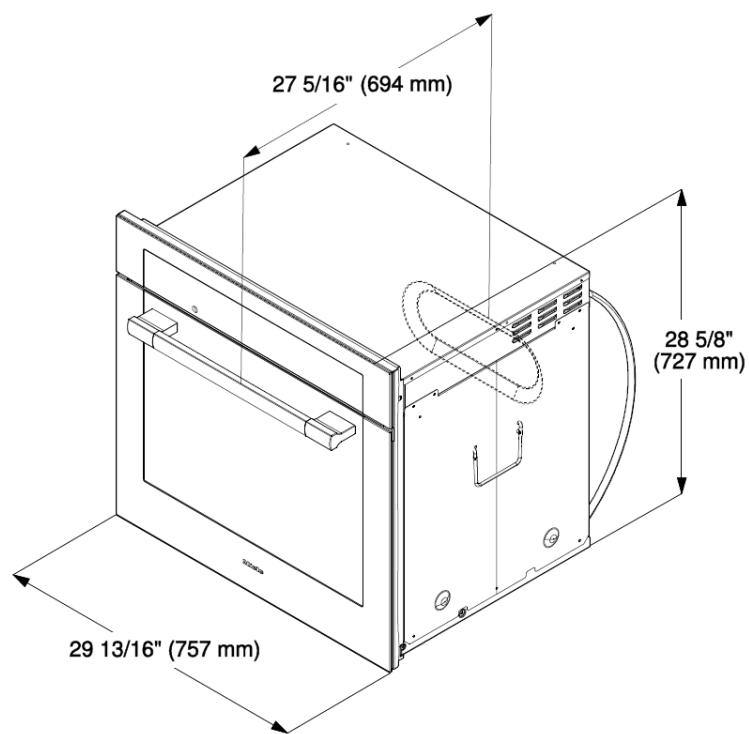

Front

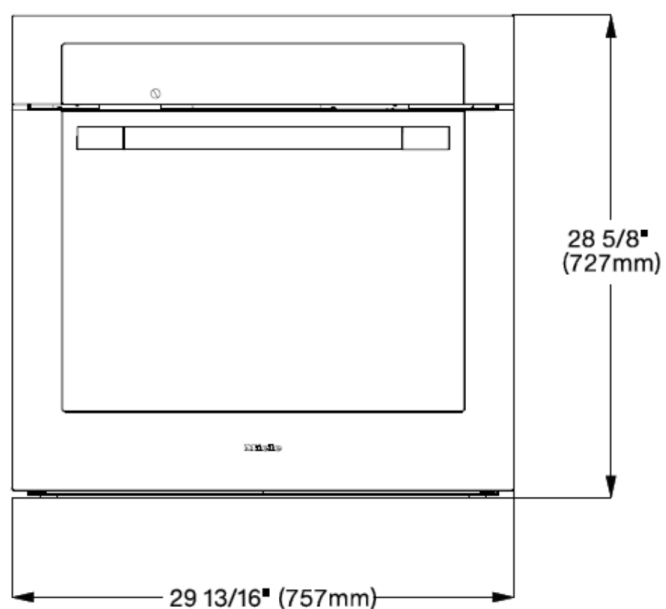


PureLine 30" Convection Oven H 6680 BP




PRODUCT VIEWS

Top View

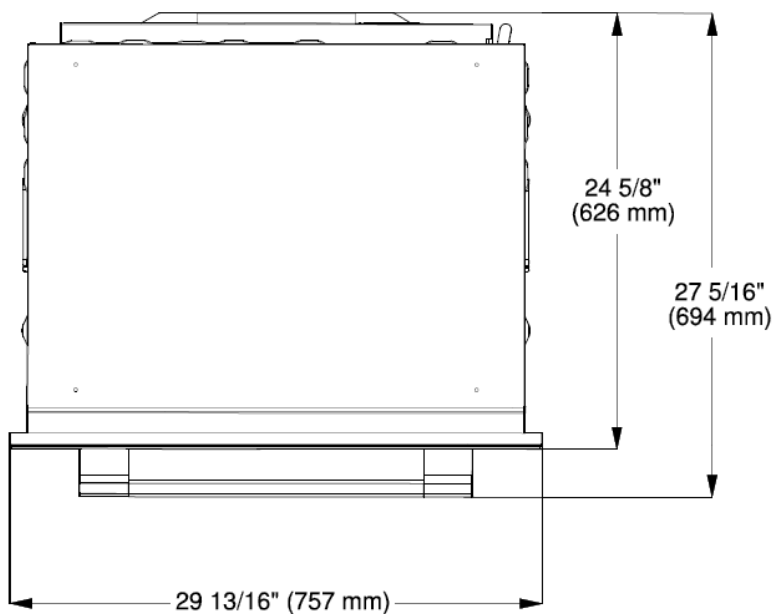

Rear View

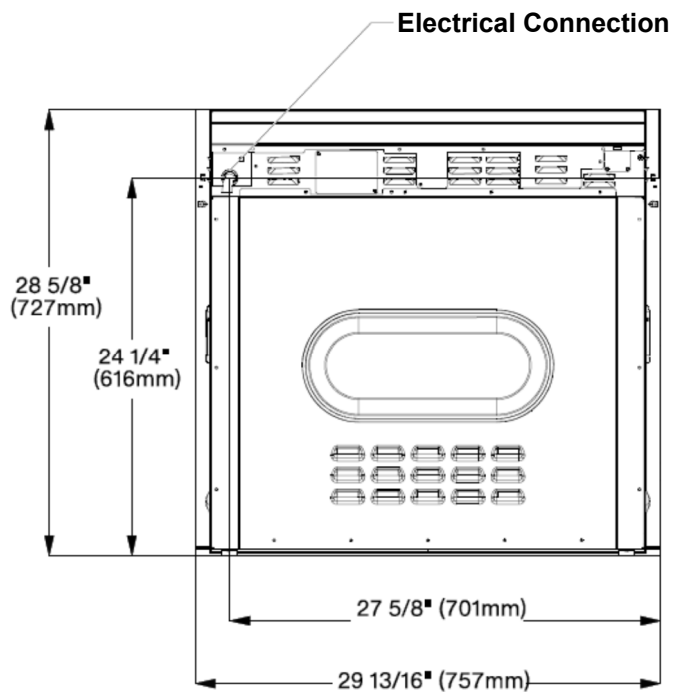


PureLine 30" Convection Oven H 6680 BP




PRODUCT VIEWS

Side View

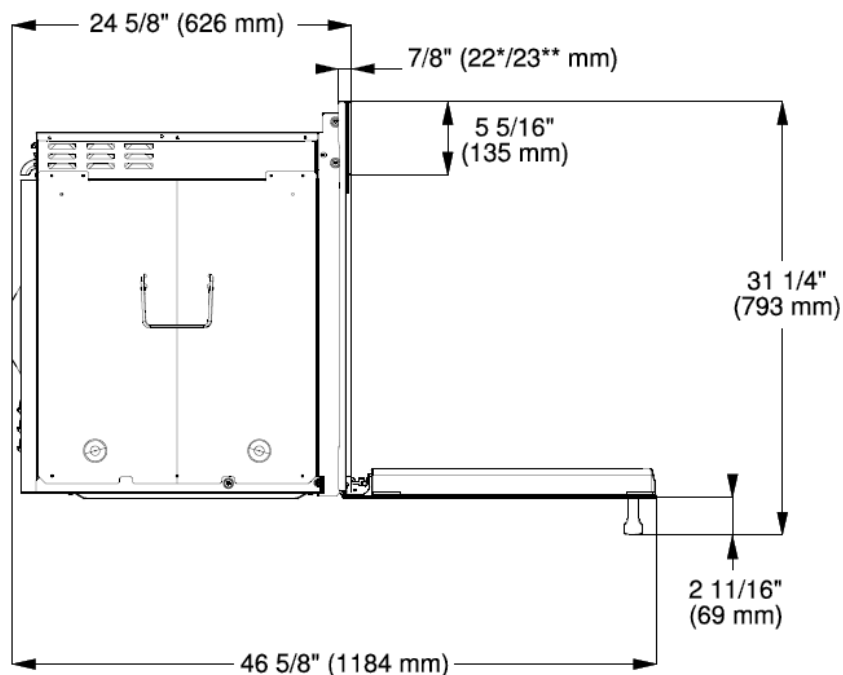

INSTALLATION SPECIFICATIONS

Install in Tall Cabinet

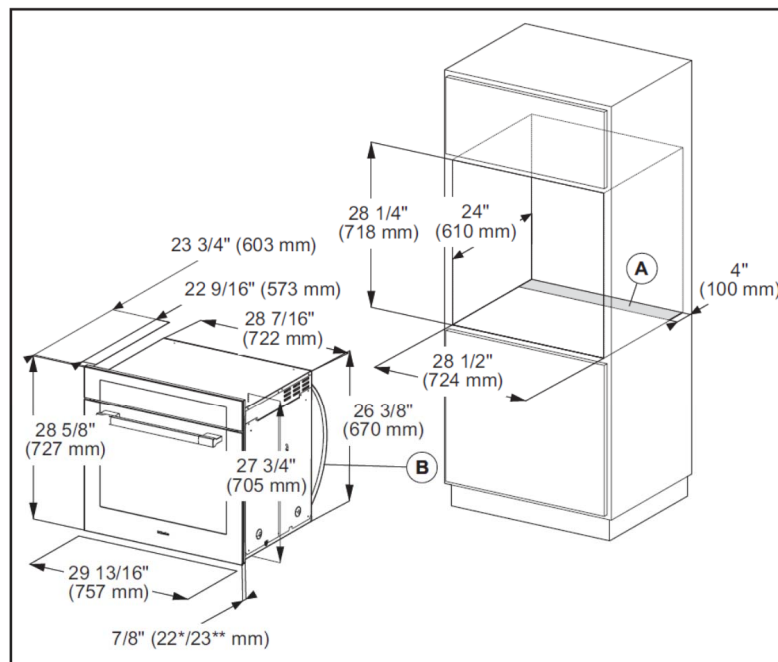


- Ⓐ Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug
- * Oven with glass front
- ** Oven with metal front

PureLine 30" Convection Oven H 6680 BP



INSTALLATION SPECIFICATIONS

Undercounter Installation

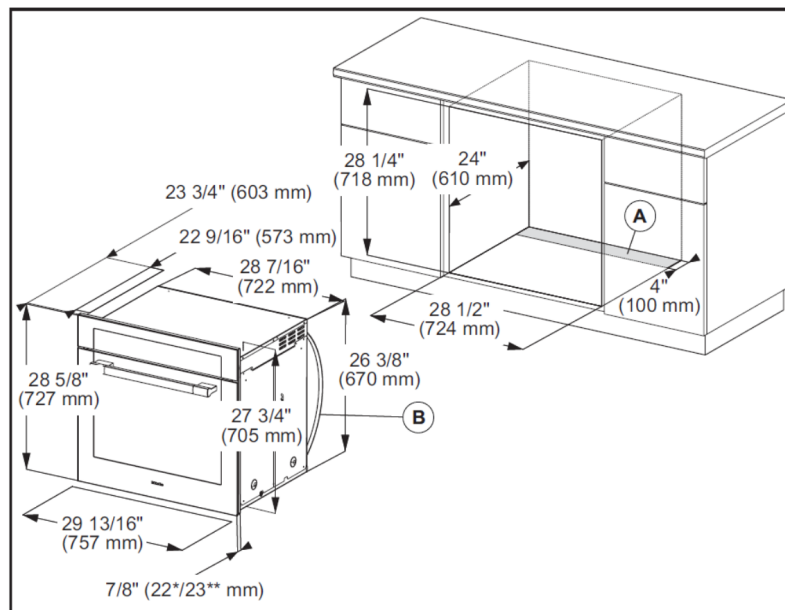


(A) Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation

(B) Power cord with plug

* Oven with glass front

** Oven with metal front

Undercounter Installation Front view Installed

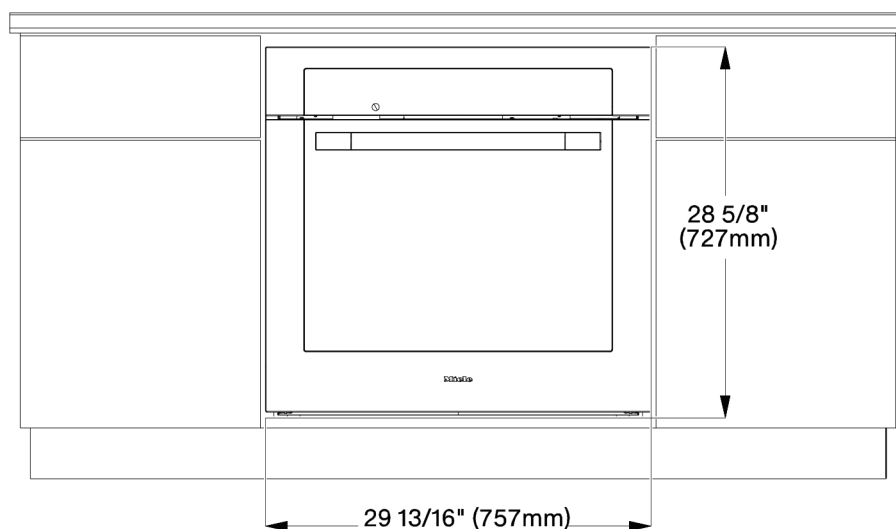


30" Flush-Mounted Induction Cooktop

KM 6365



INSTALLATION DIMENSIONS

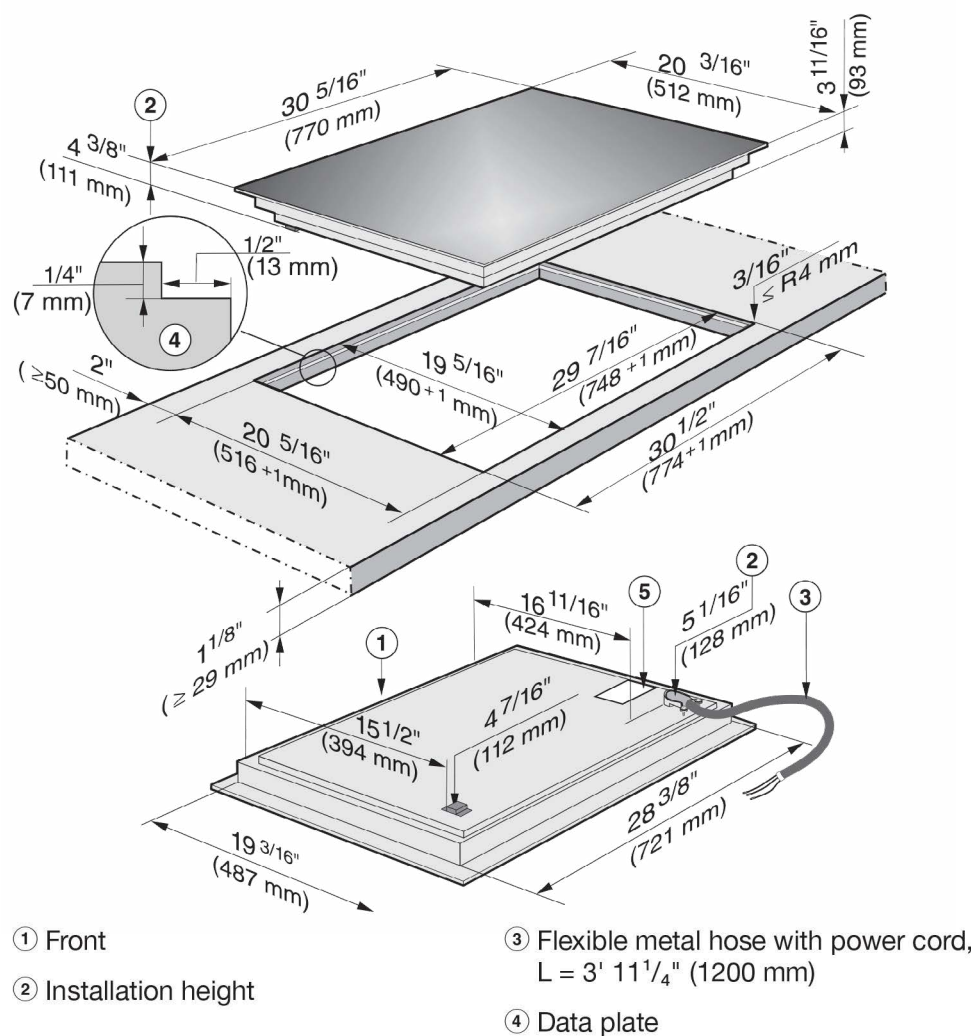

Cut-out dimensions for granite or marble counters. Please take careful note of the diagram.

This unit must only be flush mounted! Proud mounting of unit may damage the unit and will void warranty.

Miele