


# T18IF800SP

## 18-INCH FLUSH FREEZER COLUMN WITH INTERNAL ICE MAKER


FREEDOM® COLLECTION, PANEL-READY, REVERSIBLE DOOR SWING



### CUTOUT DIMENSIONS

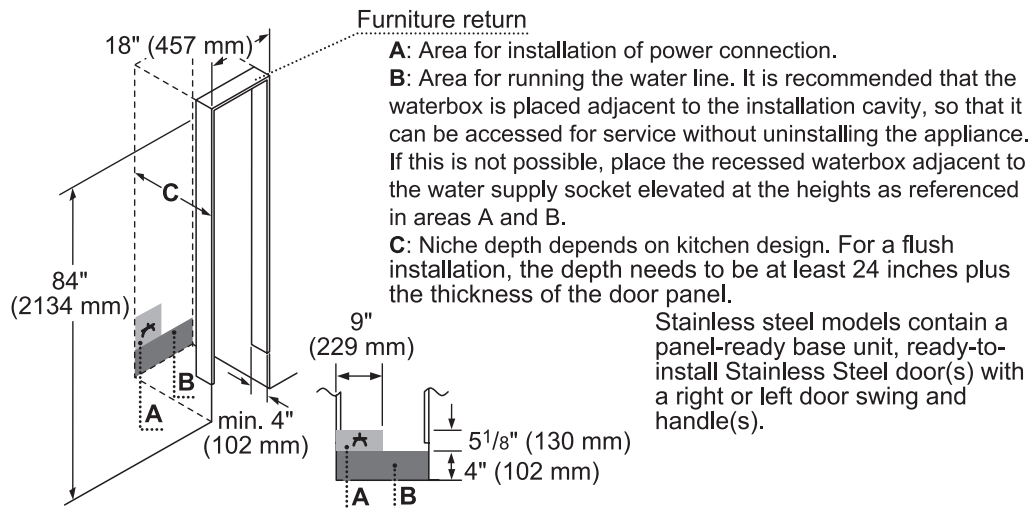

### TOP VIEW CLEARANCE

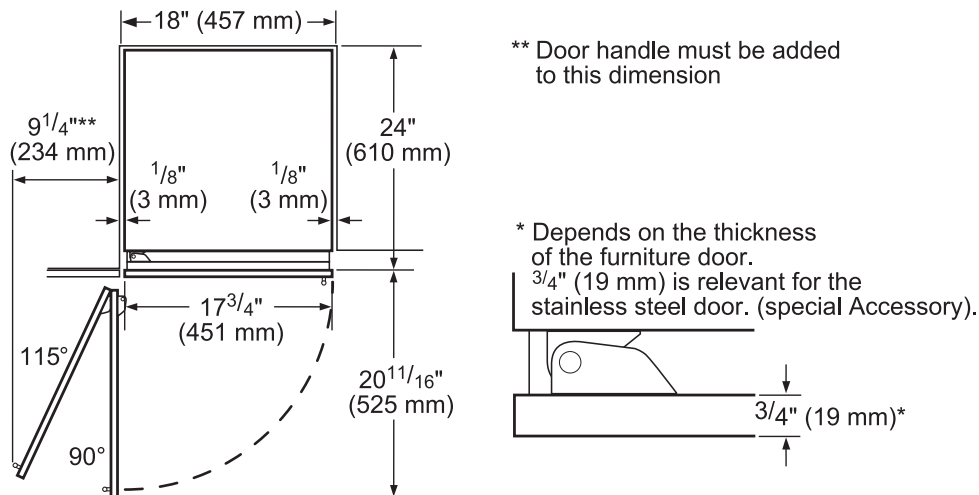


# T18IF800SP

## 18-INCH FLUSH FREEZER COLUMN WITH INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY, REVERSIBLE DOOR SWING



### PANEL DIMENSIONS

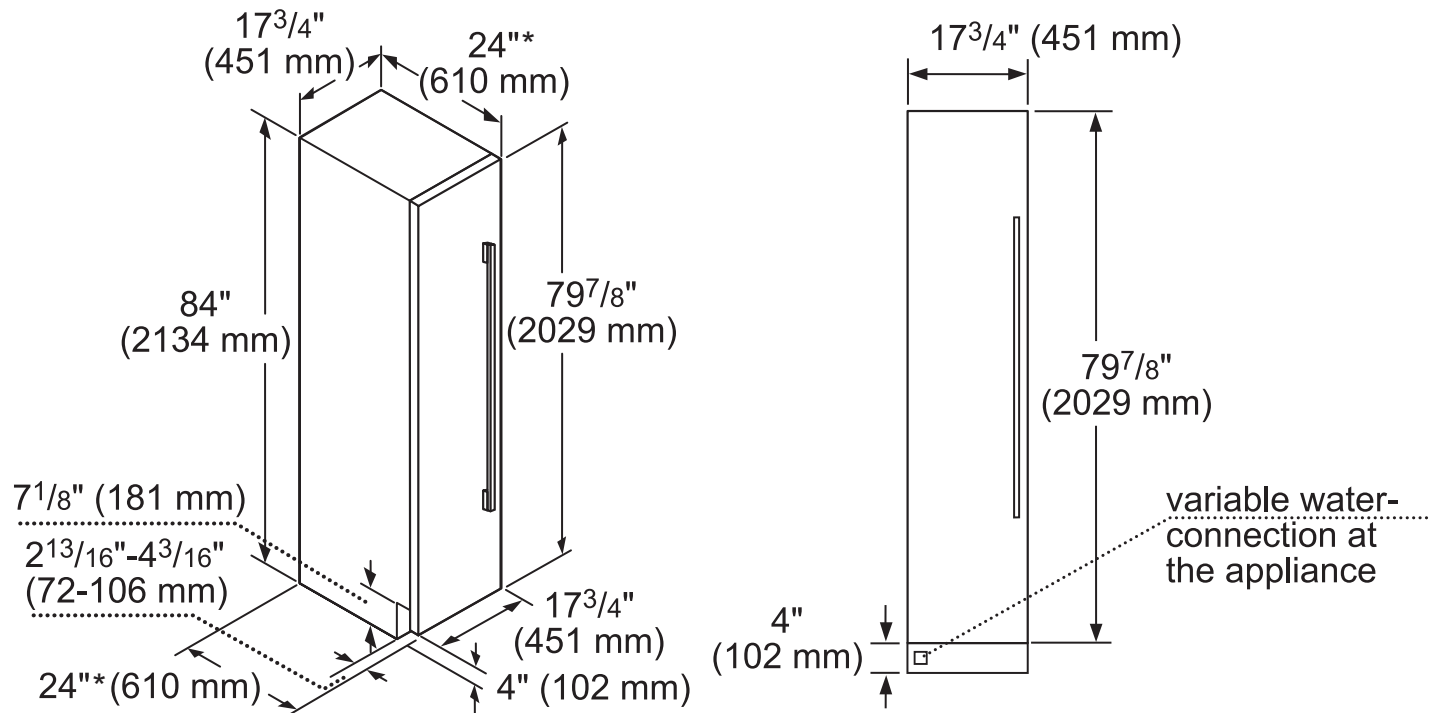

\*Excludes thickness of door panel. If standard panel with  $\frac{3}{4}"$  thickness is mounted, total depth is  $24\frac{3}{4}"$ .

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.


# T18IW800SP

## 18-INCH FLUSH CUSTOM WINE PRESERVATION COLUMN


FREEDOM® COLLECTION



### CUTOUT DIMENSIONS

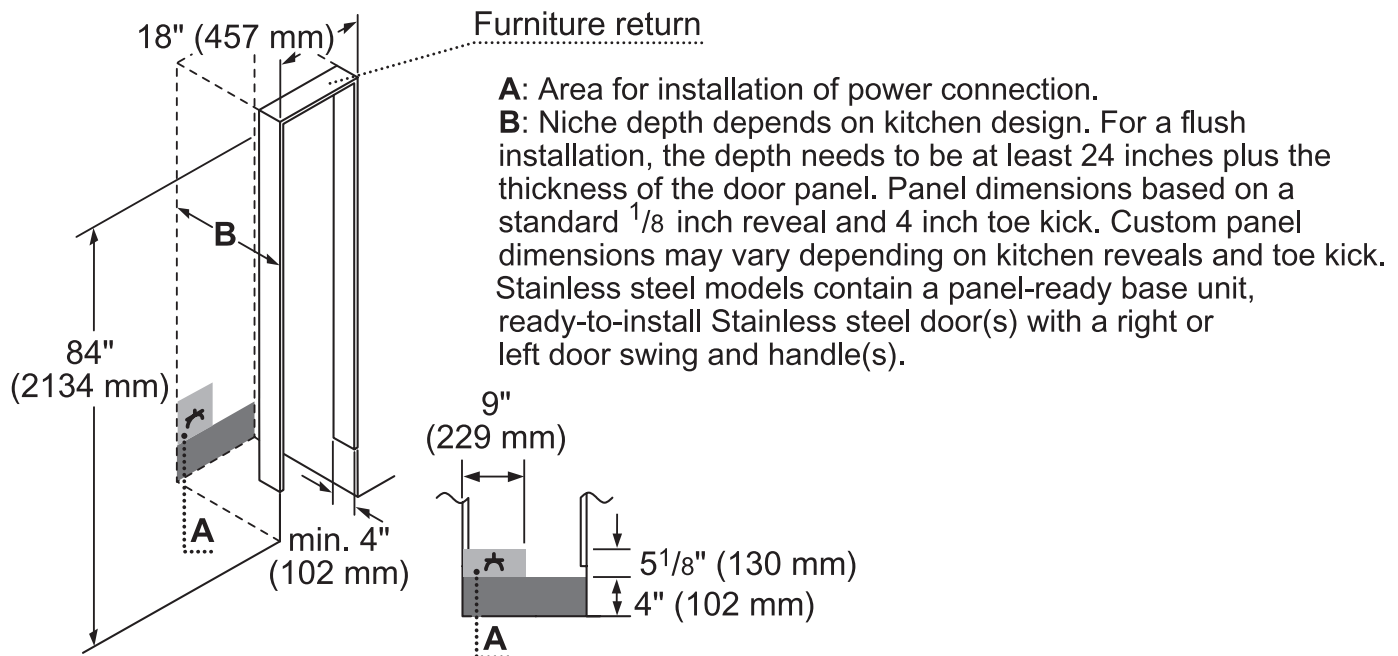


### TOP VIEW CLEARANCE

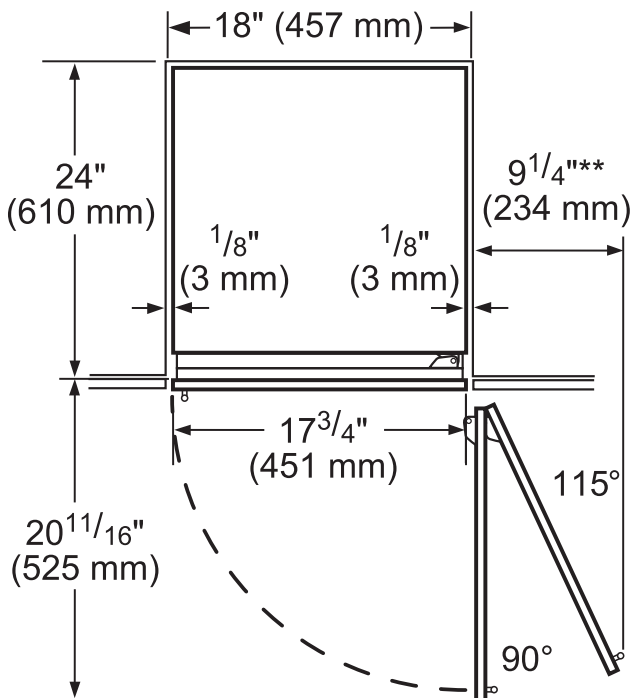

\*\* Door handle must be added to this dimension

\* Depends on the thickness of the furniture door.  $\frac{3}{4}$ " (19 mm) is relevant for the stainless steel door. (special Accessory).

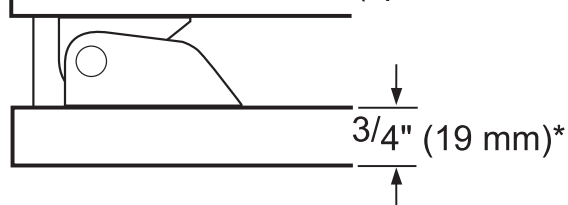


# T18IW800SP

## 18-INCH FLUSH CUSTOM WINE PRESERVATION COLUMN

FREEDOM® COLLECTION



### PANEL DIMENSIONS

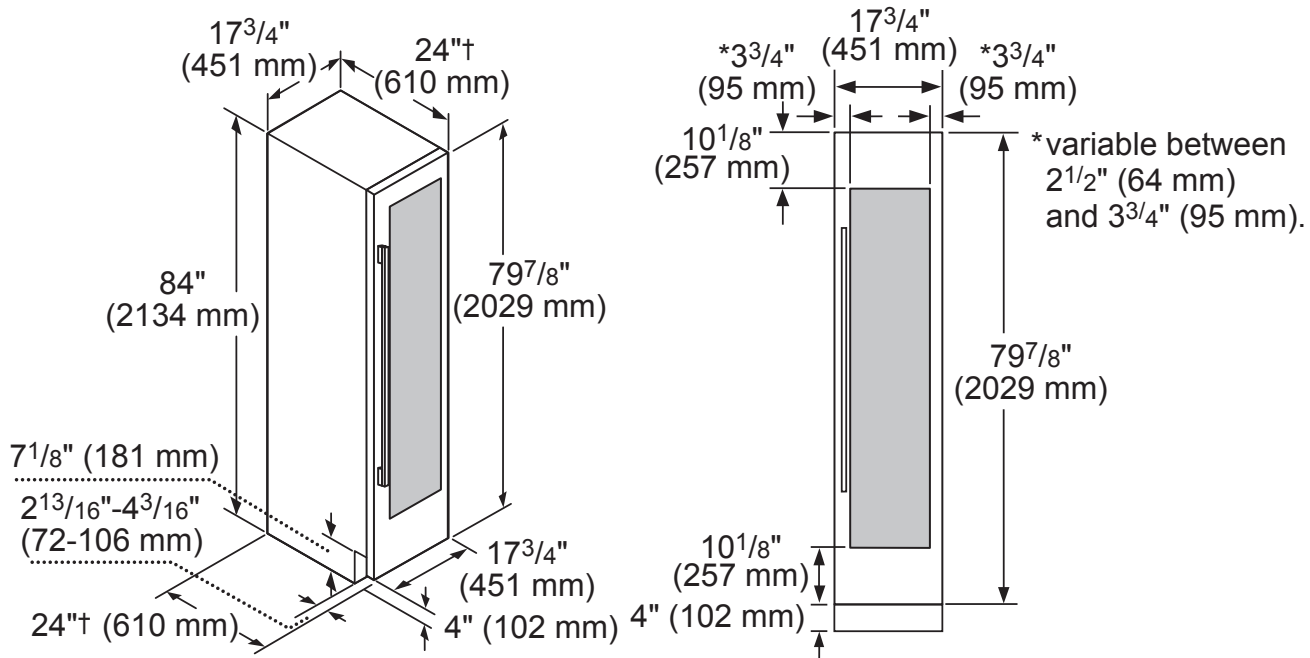

†Excludes thickness of door panel. If standard panel with  $\frac{3}{4}"$  thickness is mounted, total depth is  $24\frac{3}{4}"$ .

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

# T24IR800SP


## 24-INCH FLUSH CUSTOM FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY




### CUTOUT DIMENSIONS


#### Furniture return

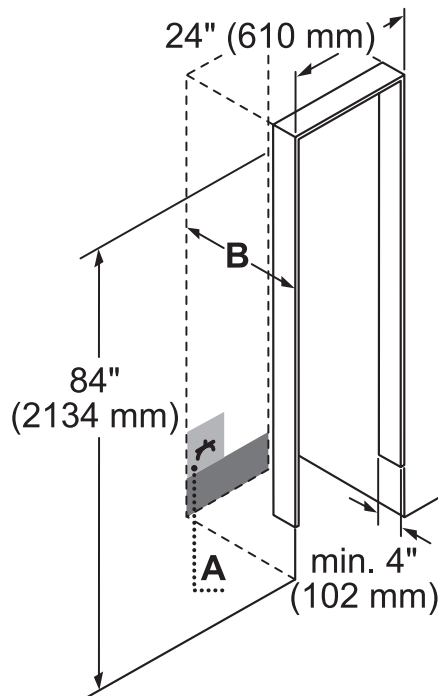

**A:** Area for installation of power connection.  
**B:** Niche depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel. Panel dimensions based on a standard  $\frac{1}{8}$ " inch reveal and 4 inch toe kick. Custom panel dimensions may vary depending on kitchen reveals and toe kick. Stainless Steel models contain a panel-ready base unit, ready-to-install Stainless Steel door(s) with a right or left door swing and handle(s).

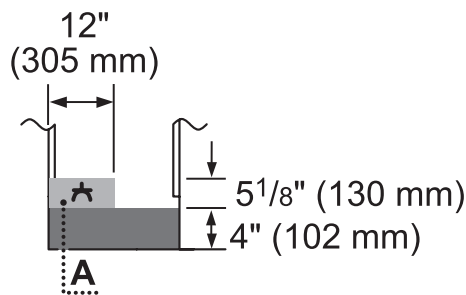


### TOP VIEW CLEARANCE

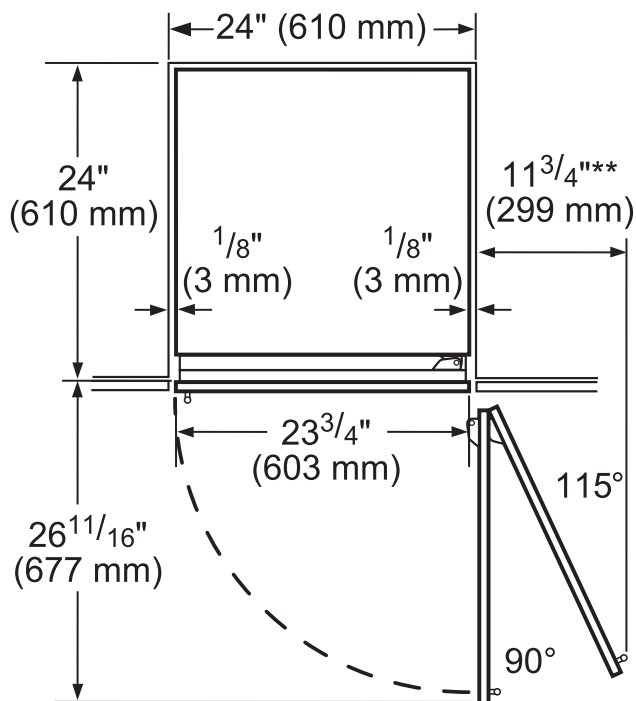

\*\* Door handle must be added to this dimension

\* Depends on the thickness of the furniture door.  $\frac{3}{4}$ " (19 mm) is relevant for the stainless steel door. (special Accessory).

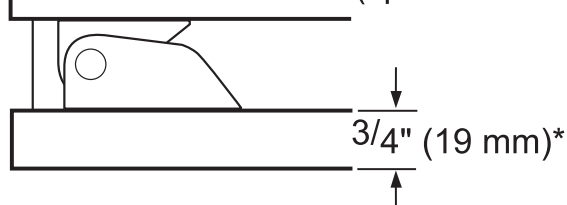


# T24IR800SP

## 24-INCH FLUSH CUSTOM FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY



### PANEL DIMENSIONS

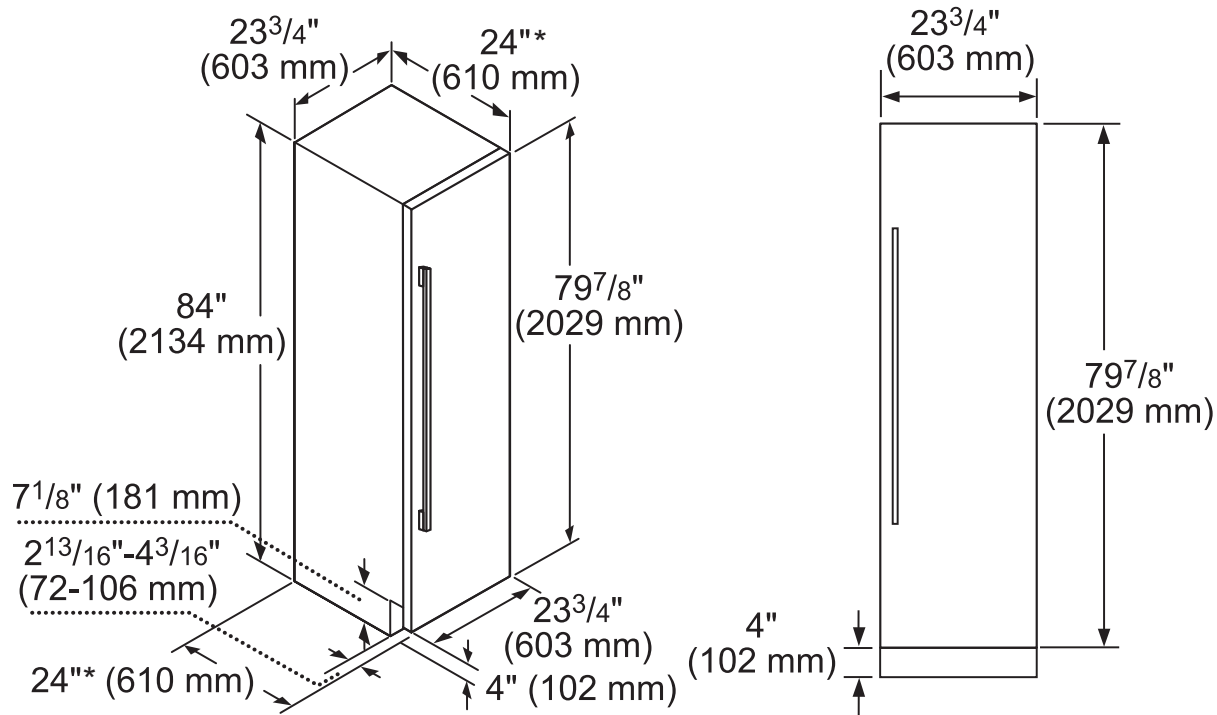

\*Excludes thickness of door panel. If standard panel with 3/4" thickness is mounted, total depth is 24 3/4".

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.


# MES301HS

## 24-INCH STEAM AND CONVECTION SINGLE BUILT-IN OVEN

MASTERPIECE® SERIES




### 24-INCH STEAM AND CONVECTION OVEN

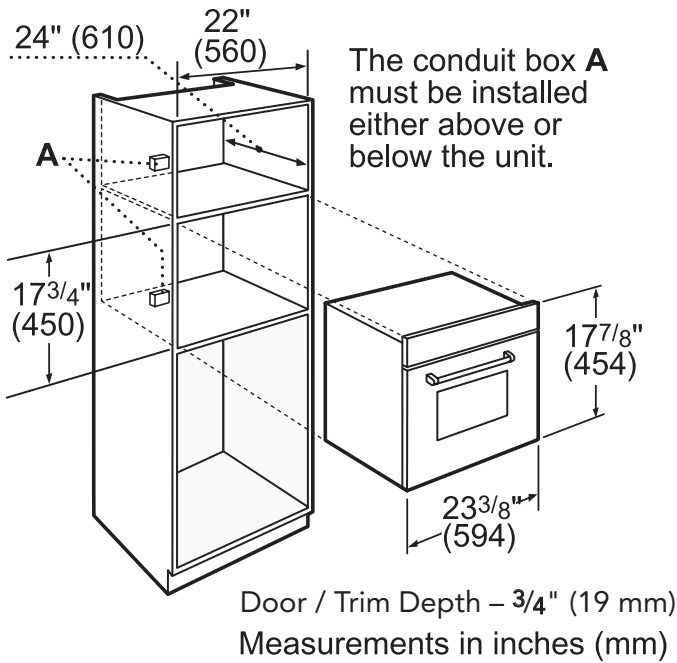


Door Handle Depth\*

Masterpiece  
Handle



\*Protrusion of handle from outer part of door. Does not include thickness of door

### 30-INCH (24-INCH STEAM AND CONVECTION OVEN WITH TRIM KIT)

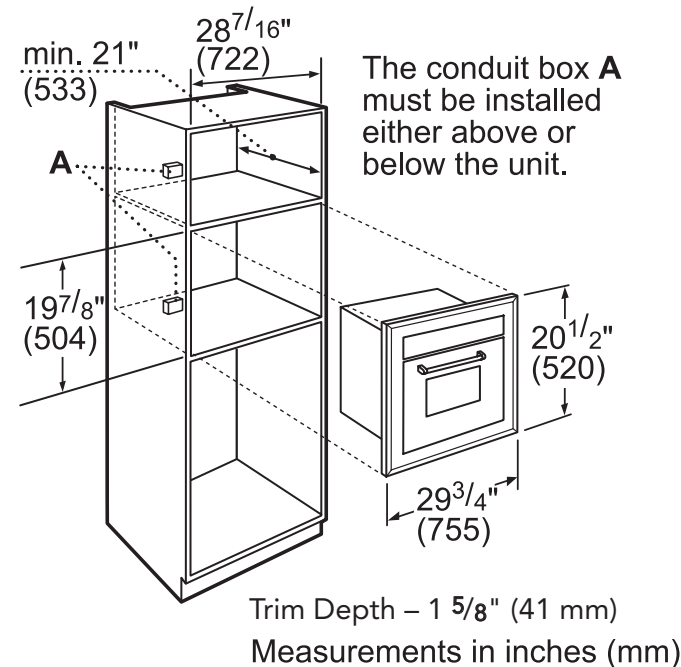


**NOTE:** 27" Trim Kit cutout width is 25 7/16" and product width is 26 3/4"

#### TRIM KIT SPECIFICATIONS

	27-Inch w/Trim Kit	30-Inch w/Trim Kit
Product Width	26 3/4"	29 3/4"
Product Height	20 1/2"	20 1/2"
Product Depth	21 5/8"	21 5/8"
Door Clearance	15"	15"
Min. Cabinet Width	27"	30"
Min. Cabinet Depth	21"	21"
Cutout Width	25 7/16"	28 7/16"
Cutout Height	19 7/8"	19 7/8"
Trim Overlaps (top - bottom - sides)	3/8" - 3/8" - 5/8"	3/8" - 3/8" - 5/8"

Door Handle Depth\*

Masterpiece  
Handle



\*Protrusion of handle from outer part of door. Does not include thickness of door


# MED301JS

## 30-INCH SINGLE BUILT-IN OVEN

MASTERPIECE® SERIES




### 30-INCH SINGLE OVEN—WALL-MOUNTED

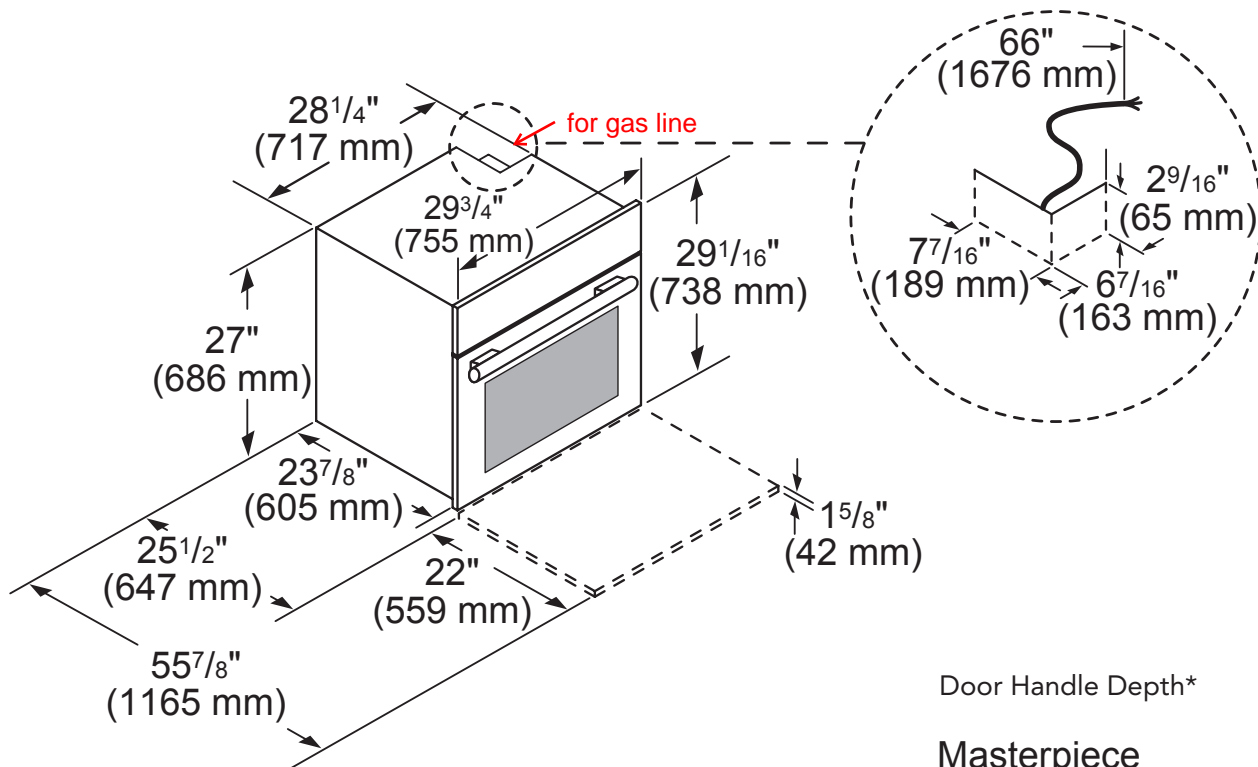


Door Handle Depth\*

#### Masterpiece Handle



\*Protrusion of handle from outer part of door. Does not include thickness of door

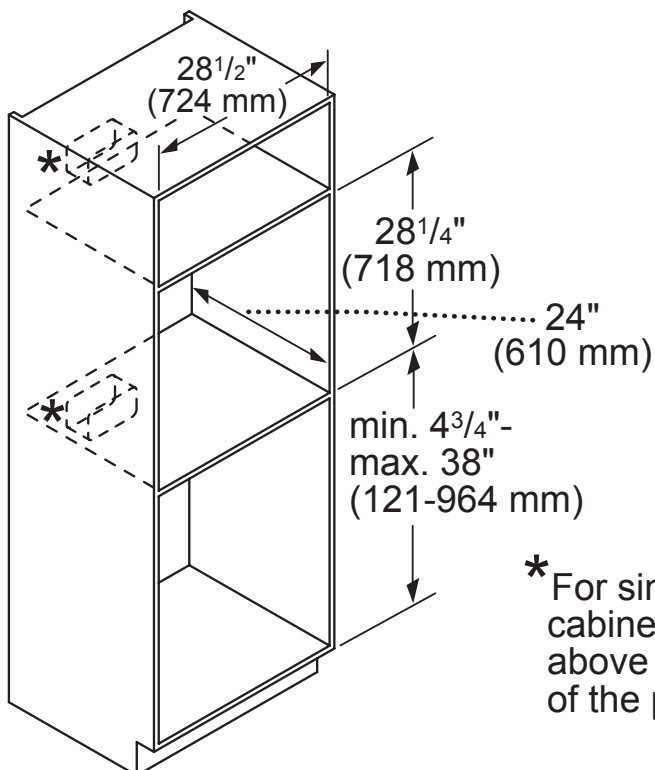

\* For single ovens installed into a wall cabinet, the junction box may be located above or beneath the unit within reach of the power cord.




# MED301JS

## 30-INCH SINGLE BUILT-IN OVEN


MASTERPIECE® SERIES



### 30-INCH SINGLE OVEN—UNDER-COUNTER

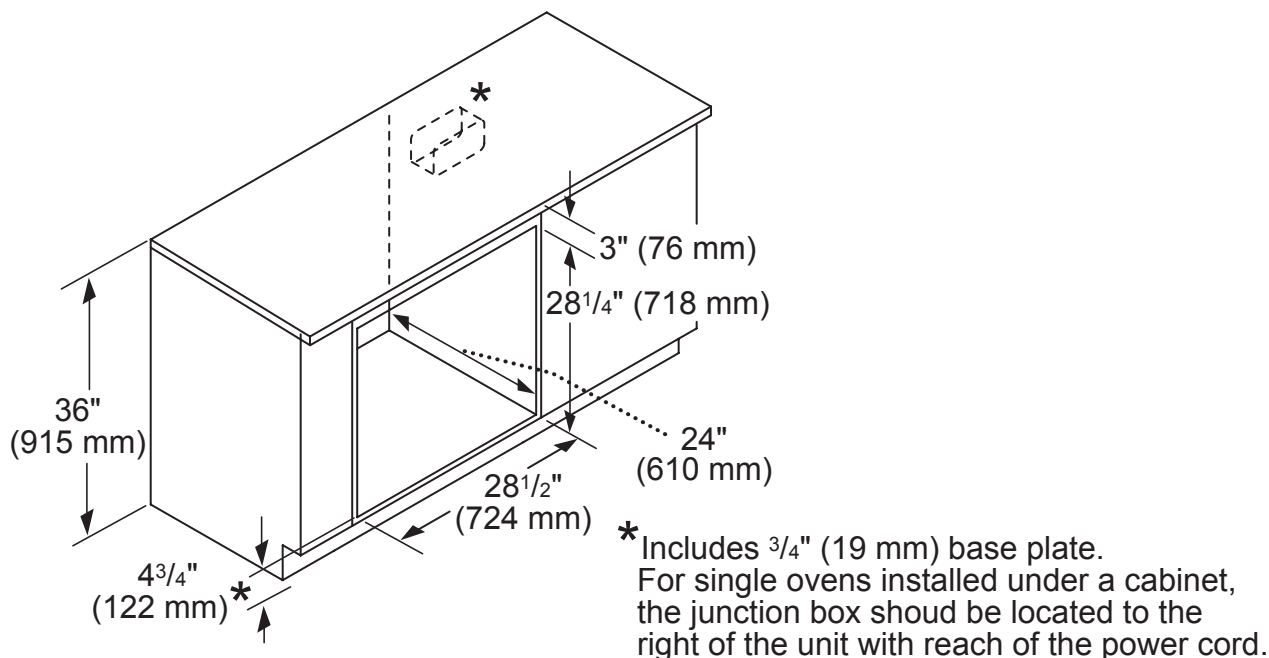

### 30-INCH SINGLE OVEN OVER WARMING DRAWER

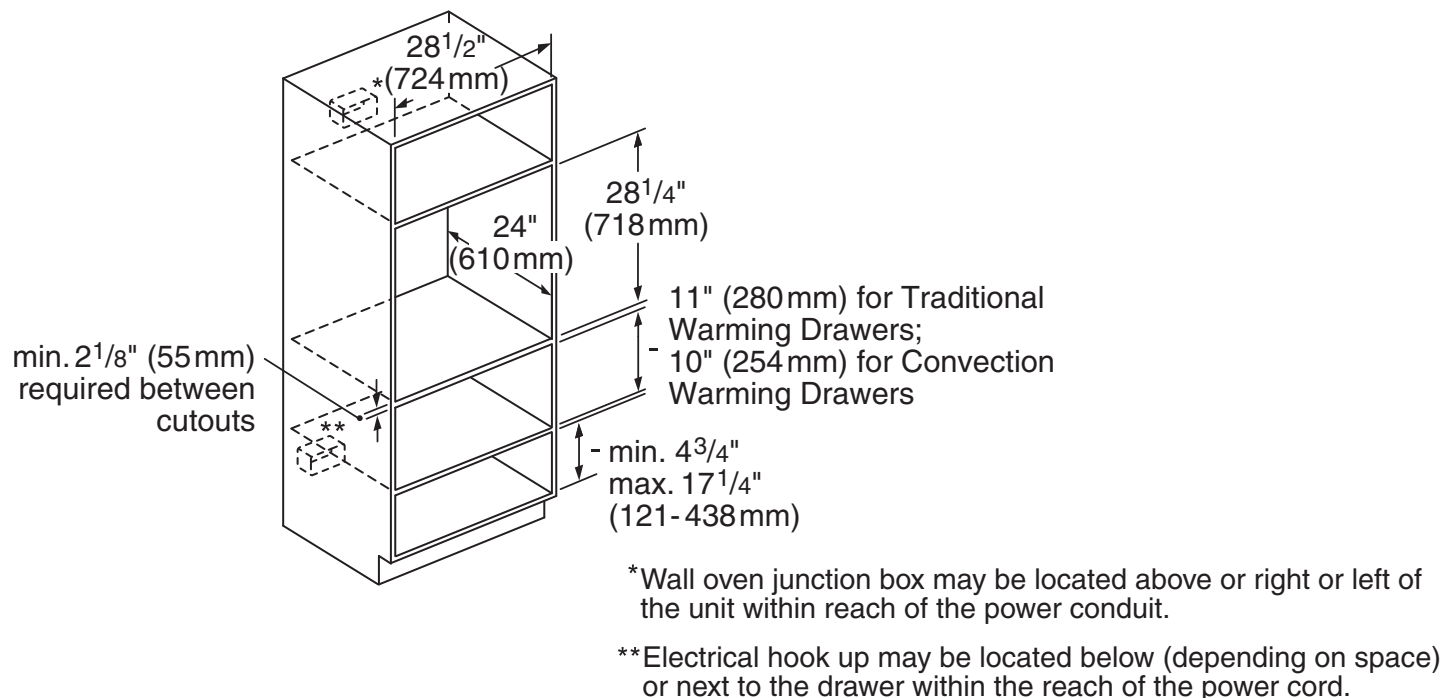

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.


# SGS365FS

## 36-INCH GAS COOKTOP

MASTERPIECE® SERIES



### 36-INCH COOKTOP AND CUTOUT DIMENSIONS

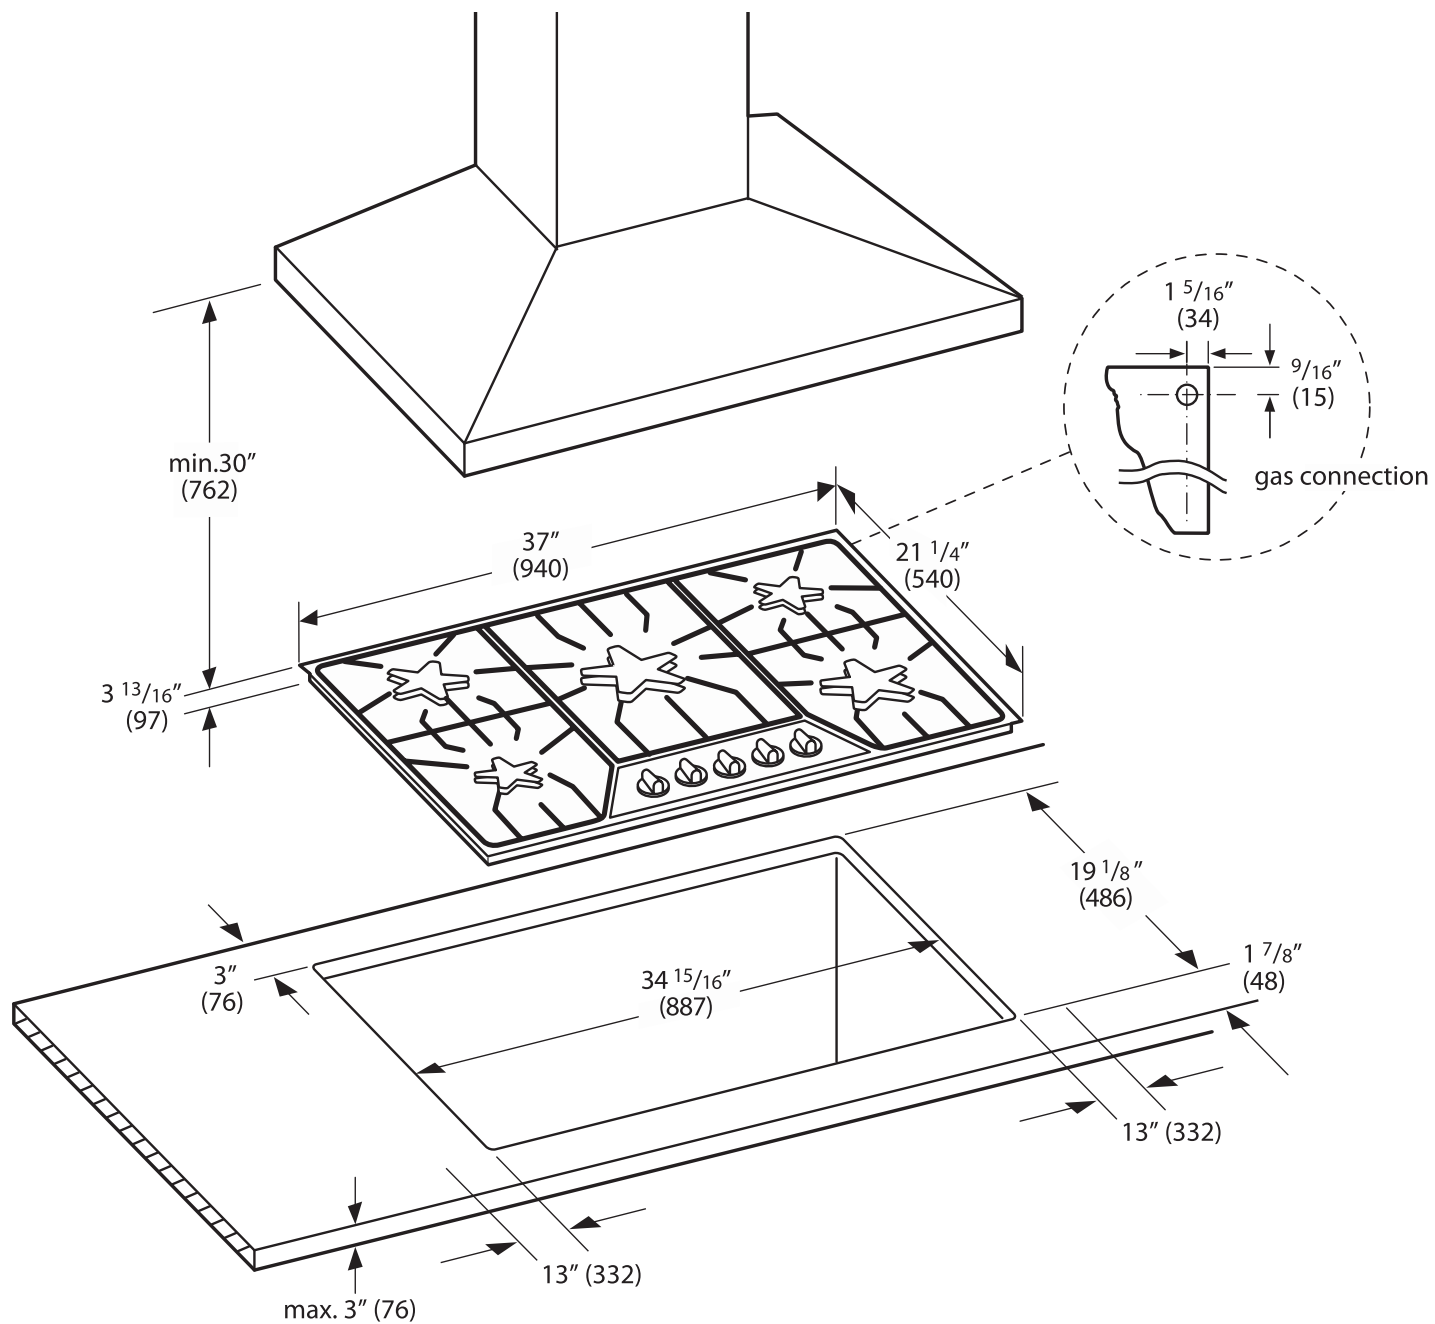


# SGS365FS

## 36-INCH GAS COOKTOP

MASTERPIECE® SERIES



### INSTALLATION ABOVE A THERMADOR BUILT-IN OVEN

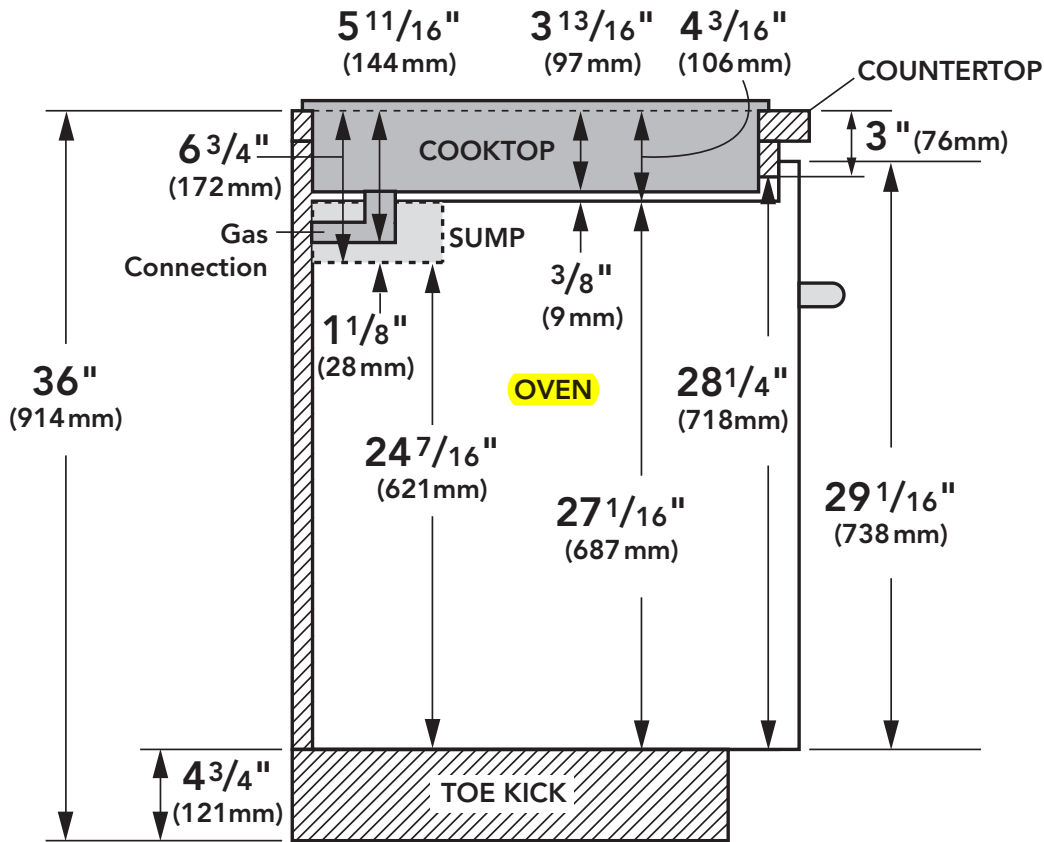

Note: Dimensions based on standard countertop height (36" with 4 3/4" toe kick including base plate).

The built-in oven can be installed below the gas cooktop as long as there is no contact between the bottom of the cooktop and the top of the oven.

Sump applies to 30-inch Wall Ovens only.



# UCVP36RS

## 36-INCH DELUXE DOWNDRAFT VENTILATION

MASTERPIECE® SERIES



### HOOD DIMENSIONS

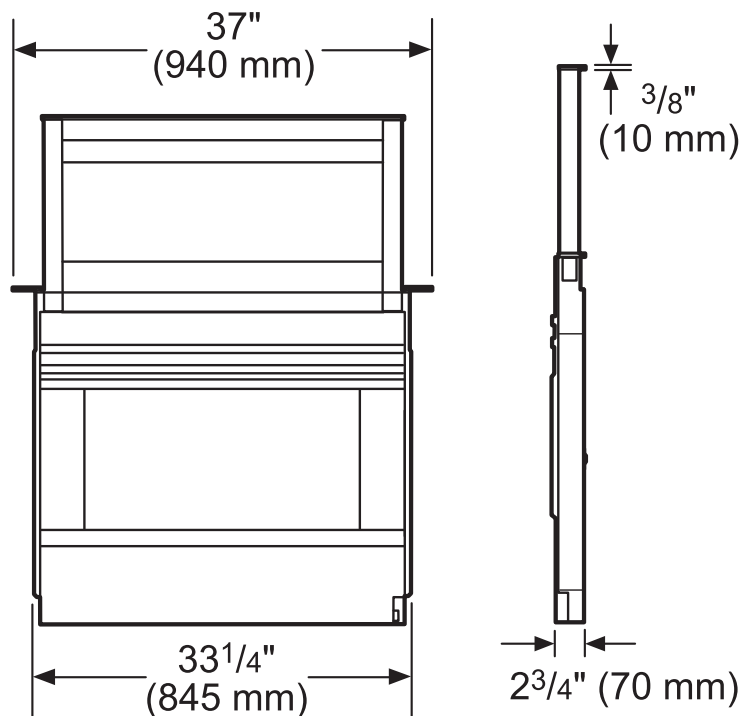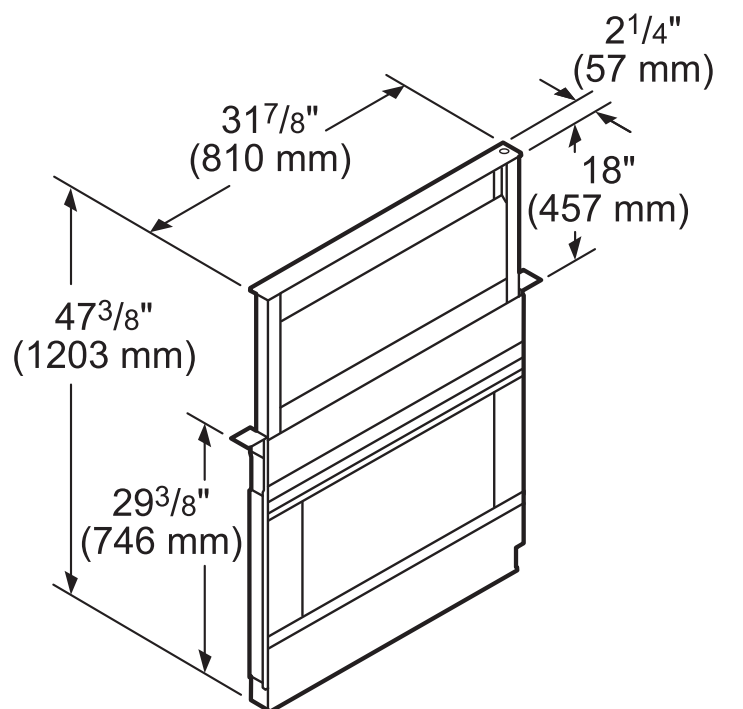

measurements in inches (mm)


# UCVP36RS

## 36-INCH DELUXE DOWNDRAFT VENTILATION


MASTERPIECE® SERIES



### CUTOUT AND CLEARANCE DIMENSIONS

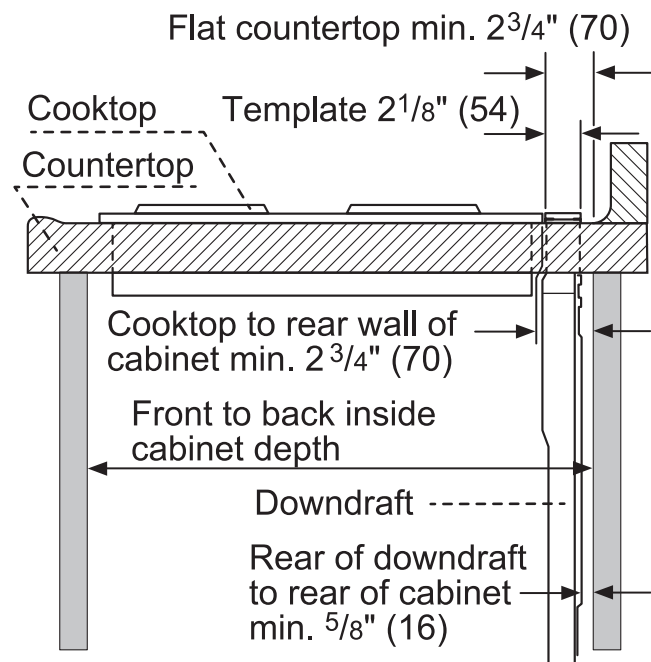

measurements in inches and (mm)

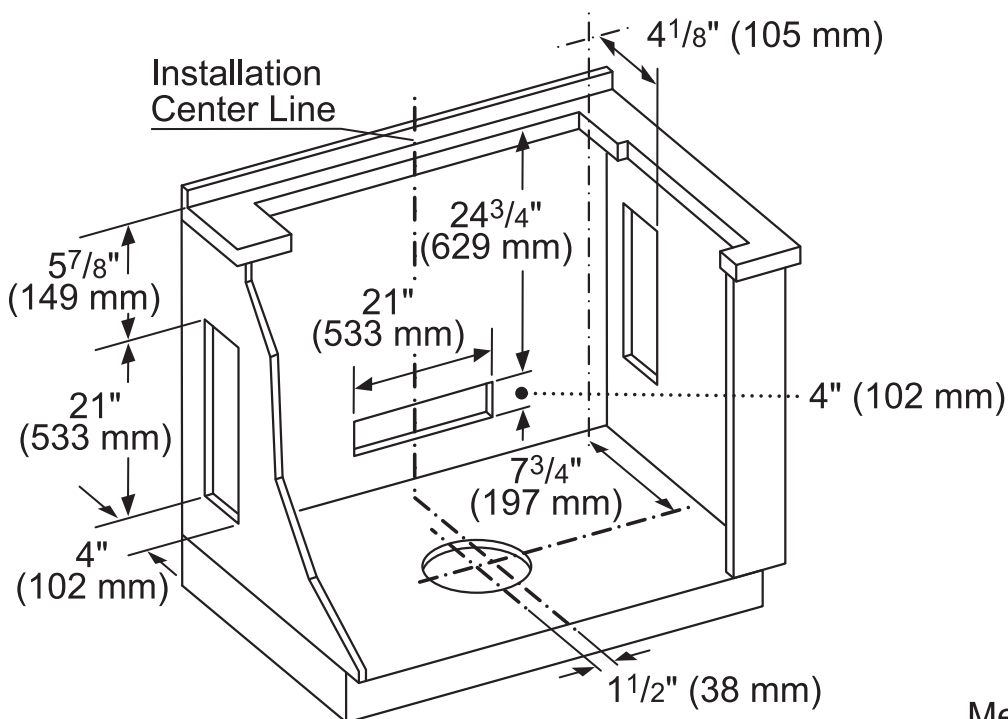

Measurements in inches (mm)


# UCVP36RS

## 36-INCH DELUXE DOWNDRAFT VENTILATION


MASTERPIECE® SERIES




### FLEXIBLE BLOWER INSTALLATION – REAR, LEFT OR RIGHT SIDE EXHAUST EXAMPLE

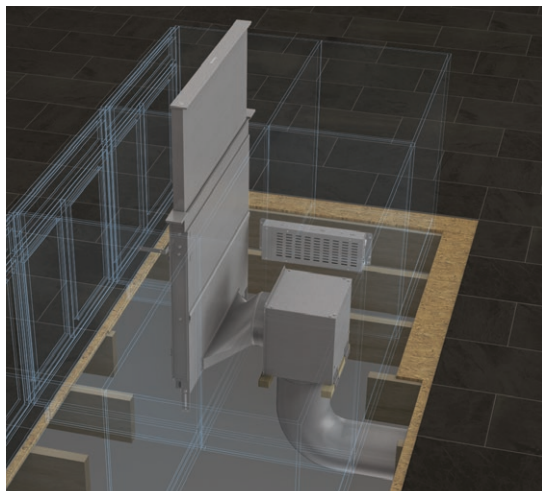

Rear Exhaust

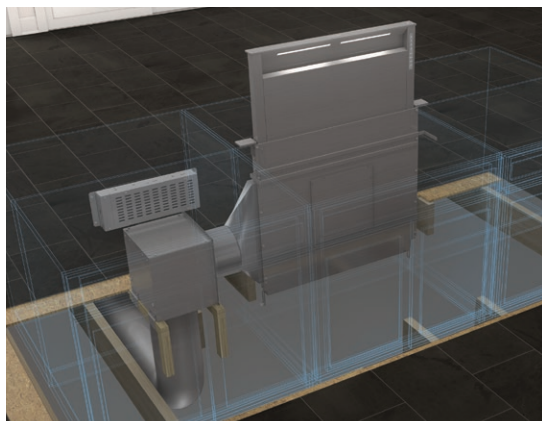

Left Side Exhaust

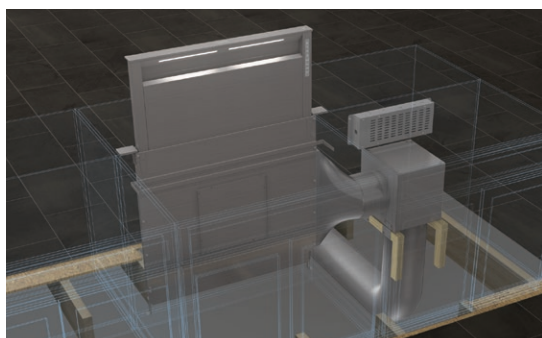


Right Side Exhaust

#### APPLICATION

- Rear, left or right side exhaust options to preserve precious kitchen storage space or if ducting is more convenient for these configurations\*
- Requires at least 18" of clearance to fit the blower and transition
- Blower must be accessible for maintenance
- Elbow and ductwork are not included

#### REQUIRED BLOWER

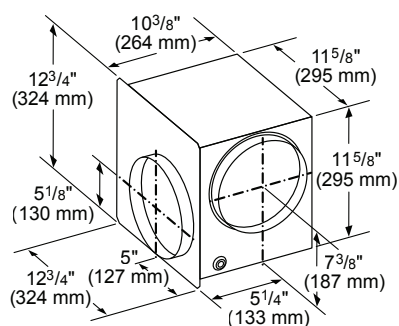


measurements in inches (mm)

#### VTD600P – 600 CFM

600 CFM flexible blower can be installed as an integrated or inline blower

#### REQUIRED ACCESSORY

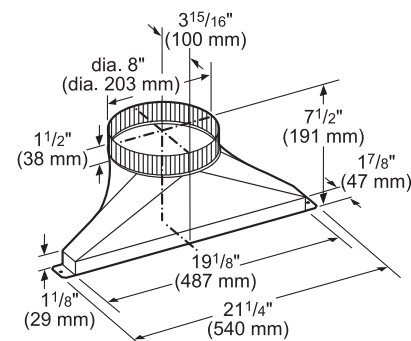


measurements in inches (mm)

#### CVTSIDE8

8" round transition allows rear venting. Use with VTD600P blower as an inline installation, and ducting with 8" round duct connections.



#### OPTIONAL ACCESSORIES

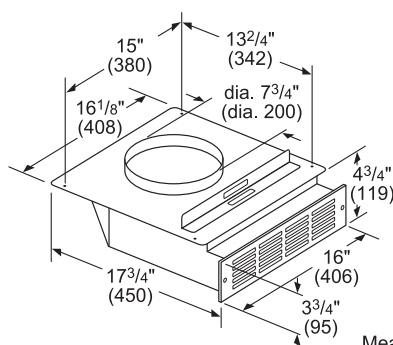

Measurements in inches and (mm)



#### RECIRCULATION KIT UCVRECIRC

Includes 1 charcoal filter and 1 metal grill vent plate (blower sold separately). Use with induction/electric cooktops only



#### REPLACEMENT CHARCOAL FILTER UCVFILTER

Includes 1 replacement charcoal filter for UCVRECIRC recirculation kit



#### DOWNDRAFT GAS COOKTOP SEAL TRIM KIT UCV36ST

Includes trim, seal, metal grill, and fasteners. Required for installations with 36" gas cooktops.



#### EXTNCES

Extends electrical panel cable 5-ft. to connect remotely located electrical panel to downdraft. Ability to connect two cables together to make a 10-foot cable.

\*For only front downward ducting applications, electrical panel must be remotely mounted. Electrical panel can still be remotely mounted in other exhaust configurations if desired. Optional 5' extension cable EXTNCES accessory is available to connect remotely placed electrical panel to downdraft. Refer to installation manual.

**NOTE:** Some applications may require deeper cabinets. Side and rear exhaust require at least 18" of clearance to fit the blower and/or ductwork. Refer to installation manual.




# UCVP36RS

## 36-INCH DELUXE DOWNDRAFT VENTILATION

MASTERPIECE® SERIES




### FLEXIBLE BLOWER INSTALLATION – SIDE EXHAUST WITH SLIM 2' RECTANGULAR DUCT EXAMPLE

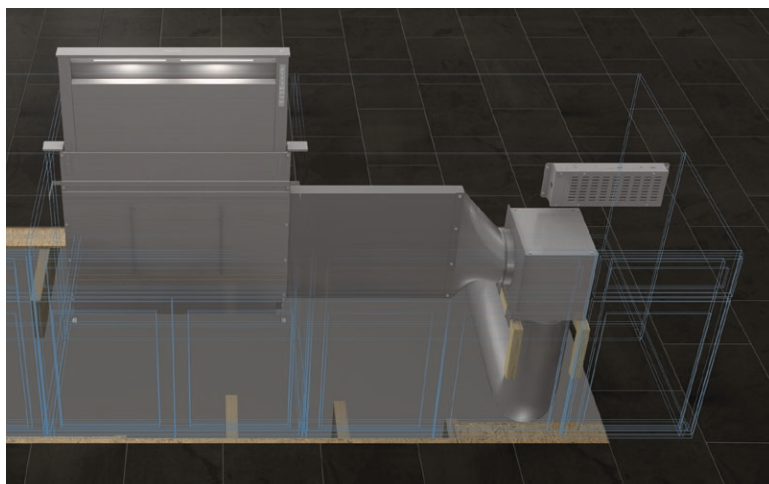


#### APPLICATION

- Side exhaust option to preserve precious kitchen storage space or if ducting is more convenient for this configuration\*
- A slim 2' rectangular duct is available to place flexible blower in areas such as unused corner in island or peninsula applications
- Blower must be accessible for maintenance
- Elbow and ductwork are not included

#### REQUIRED BLOWER

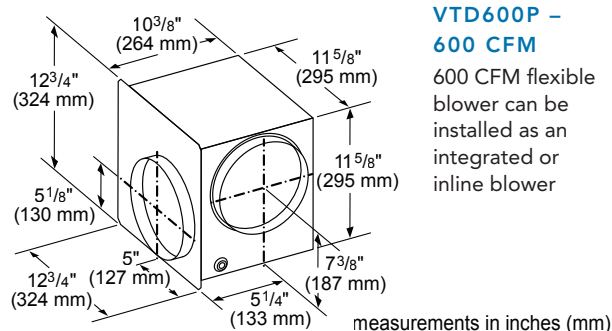


#### REQUIRED ACCESSORIES

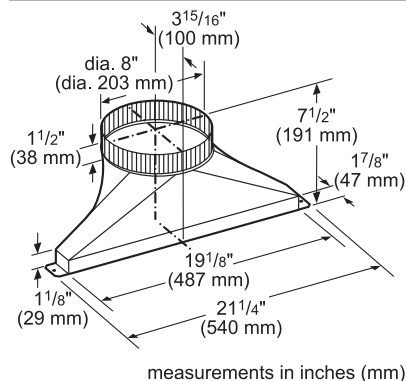



#### CVTSIDE8

8" round transition to connect CVDUCT2 to VTD600P. Use with VTD600P blower as an inline installation, and ducting with 8" round duct connections.



#### CVDUCT2


Rectangular 2 ft. long x 1 7/8 in deep x 19 in wide duct. CVDUCT2 transition required to directly connect CVDUCT2 to sides or rear of downdraft housing. Can be used as an extension to exhaust through a cabinet or wall, and can be cut to modify length. For use with installation of inline or remote blower applications with CVTSIDE6, CVTSIDE8, and CVTSIDE10.

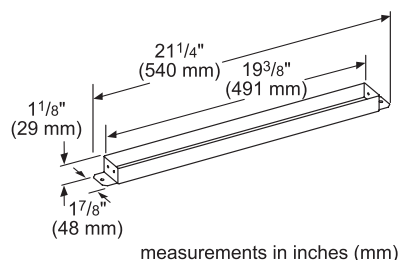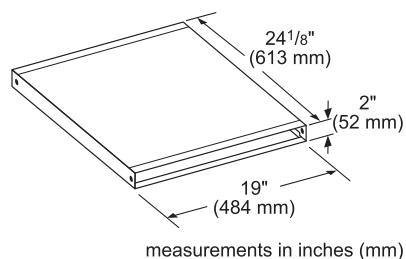

#### CVTRECT2

Transition required to connect CVDUCT2 rectangular duct to downdraft housing at left, right, or rear

#### OPTIONAL ACCESSORIES

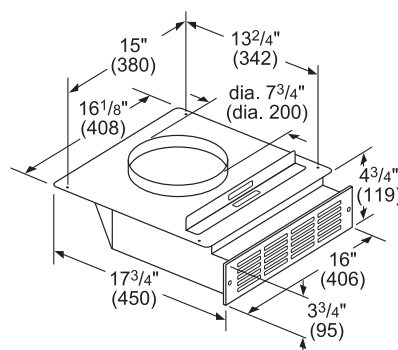

#### RECIRCULATION KIT UCVRECIRC

Includes 1 charcoal filter and 1 metal grill vent plate (blower sold separately). Use with induction/electric cooktops only



#### REPLACEMENT CHARCOAL FILTER UCVFILTER

Includes 1 replacement charcoal filter for UCVRECIRC recirculation kit



#### DOWNDRAFT GAS COOKTOP SEAL TRIM KIT UCV36ST

Includes trim, seal, metal grill, and fasteners. Required for installations with 36" gas cooktops.



#### EXTNCES

Extends electrical panel cable 5-ft. to connect remotely located electrical panel to downdraft. Ability to connect two cables together to make a 10-foot cable.

\*For only front downward ducting applications, electrical panel must be remotely mounted. Electrical panel can still be remotely mounted in other exhaust configurations if desired. Optional 5' extension cable EXTNCES accessory is available to connect remotely placed electrical panel to downdraft. Refer to installation manual.


# UCVP36RS

## 36-INCH DELUXE DOWNDRAFT VENTILATION


MASTERPIECE® SERIES



### FLEXIBLE BLOWER INSTALLATION – RECIRCULATION EXAMPLE

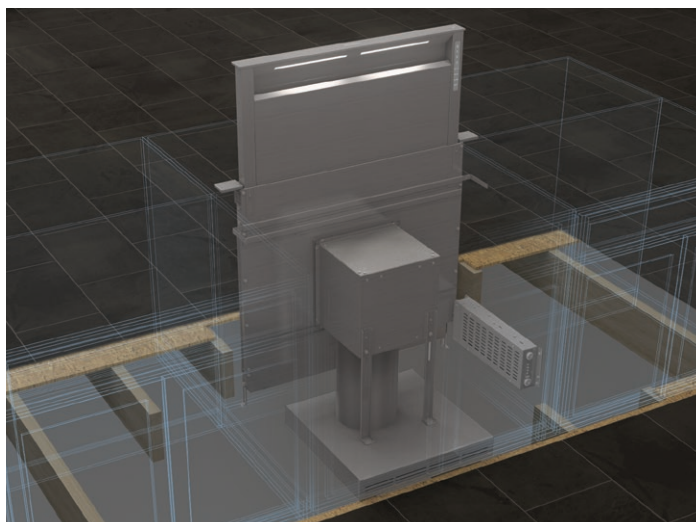

#### REQUIRED BLOWER

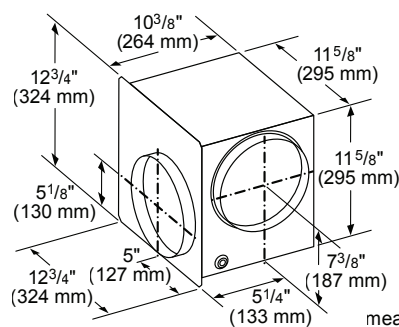


#### VTD600P – 600 CFM

600 CFM flexible blower can be installed as an integrated or inline blower

measurements in inches (mm)

#### REQUIRED ACCESSORIES

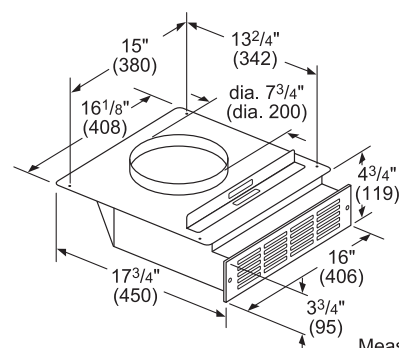

#### RECIRCULATION KIT UCVRECIRC

Includes 1 charcoal filter and 1 metal grill vent plate (blower sold separately). Use with induction/electric cooktops only

Measurements in inches and (mm)

#### OPTIONAL ACCESSORIES



#### REPLACEMENT CHARCOAL FILTER UCVFILTER

Includes 1 replacement charcoal filter for UCVRECIRC recirculation kit



#### DOWNDRAFT GAS COOKTOP SEAL TRIM KIT UCV36ST

Includes trim, seal, metal grill, and fasteners. Required for installations with 36" gas cooktops.




#### EXTNCES

Extends electrical panel cable 5-ft. to connect remotely located electrical panel to downdraft. Ability to connect two cables together to make a 10-foot cable.

\*For front downward ducting applications, electrical panel must be remotely mounted. Optional 5' extension cable EXTNCES5 accessory is available to connect remotely placed electrical panel to downdraft. Refer to installation manual.

#### APPLICATION

- Allows for non-ducted downdraft installation by eliminating the need to exhaust to the exterior of the home\*
- Recirculation module and metal grill vent plate placement can be rotated for flexible exhaust placement
- Elbow and ductwork are not included
- Use with induction/electric cooktops only

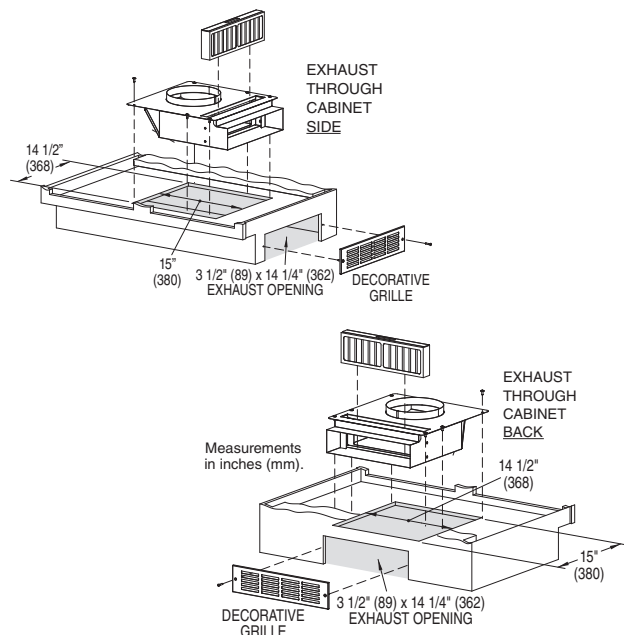

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.




# DWHD650JFM

## SAPPHIRE® 6-PROGRAM DISHWASHER

MASTERPIECE® SERIES HANDLE



### DISHWASHER & CUTOUT DIMENSIONS

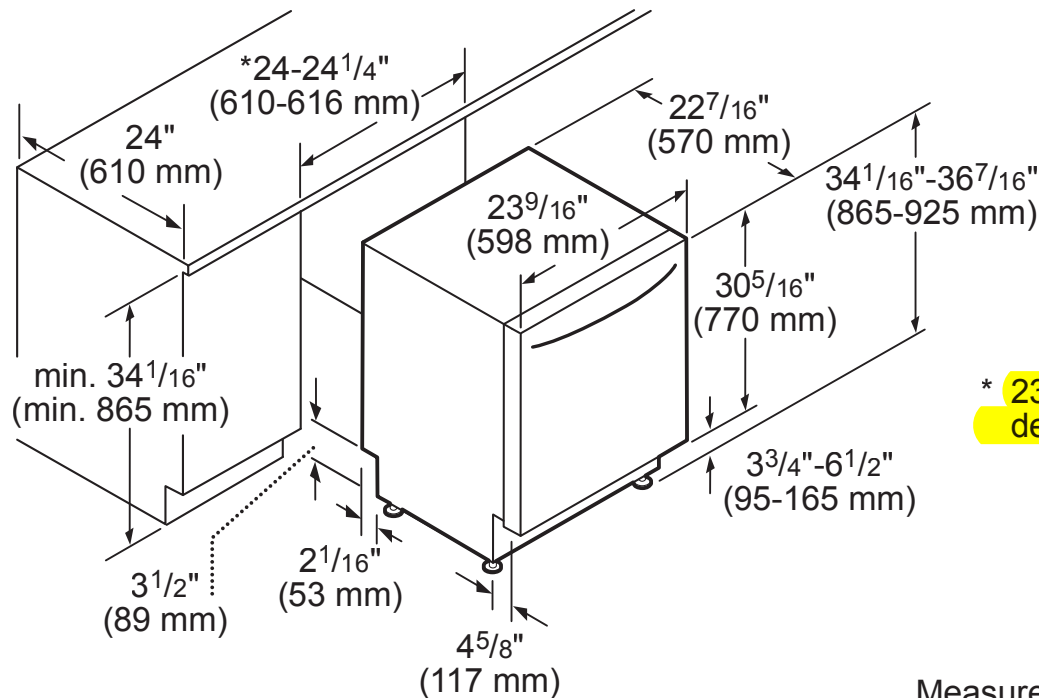

\* 23<sup>5</sup>/<sub>8</sub>" (600 mm) without decor strips

Measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.