


PerfectCool Bottom Mount Refrigerator KFNS 37692 iDE-1



Installation Dimension

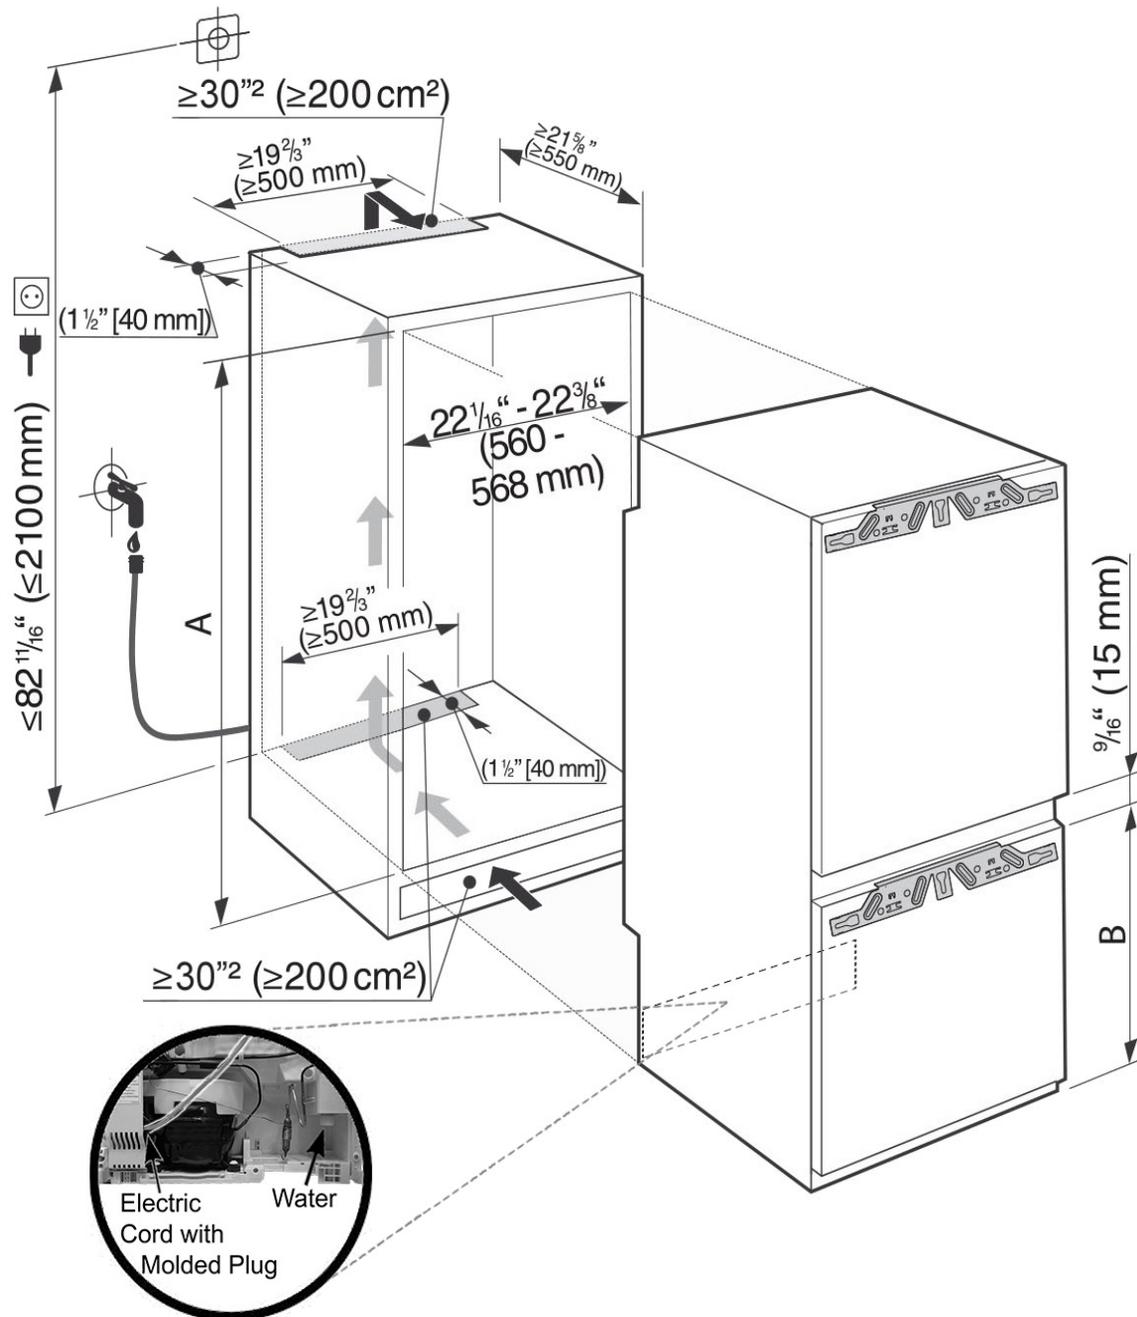


	Niche height [mm] A	Freezer section [mm] B
KFNS 37692 iDE	69 3/4" - 70 3/8" (1772 - 1788 mm)	27 3/8" (695 mm)

Before installation, ensure the building-in niche is the correct size. The specified ventilation cross-sections must be adhered to in order to ensure the correct functioning of the appliance.

For additional information on Plumbing, please refer to the Plumbing section in the Install Manual.


For Side-by-Side installations two niche cutouts are required.

Ventilation Dimension

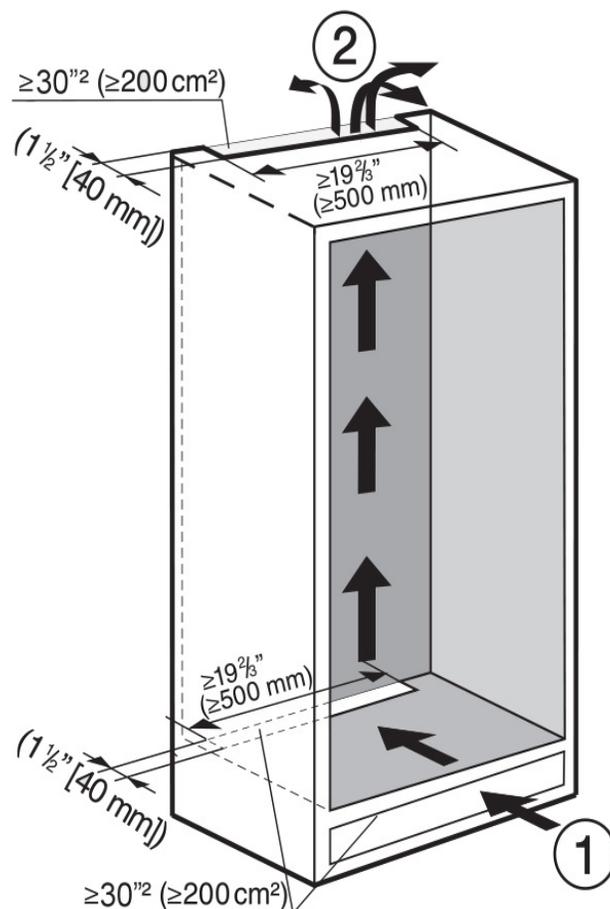

- Air intake (1) occurs via the plinth at the bottom of the appliance and the air escapes at the top (2) at the rear of the housing unit.
- A ventilation gap of at least $1\frac{5}{8}$ " (40 mm) depth must be provided behind the appliance for air to circulate.
- The ventilation cross-sections in the plinth housing unit and above the appliance must amount to at least $78\frac{3}{4}$ "² to ensure that air can circulate without obstruction.
- Please refer to the manual for further ventilation details.

Top Ventilation Cross-section

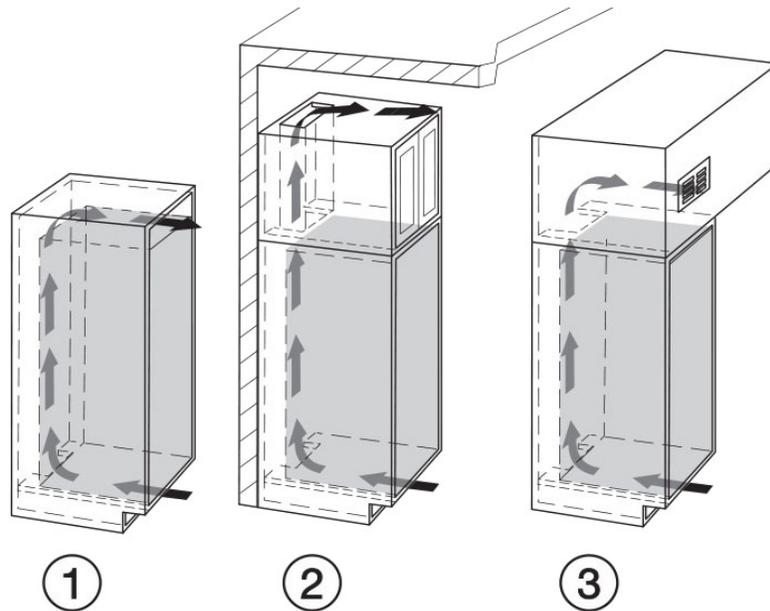

(1) Directly above the appliance with a ventilation grill (free airflow of at least $78 \frac{3}{4}''^2$).

(2) In between the housing unit and ceiling.


(3) Through a suspended ceiling.

- Please refer to manual for further ventilation details.

PerfectCool Bottom Mount Refrigerator KFNS 37692 iDE-1



Custom Panel

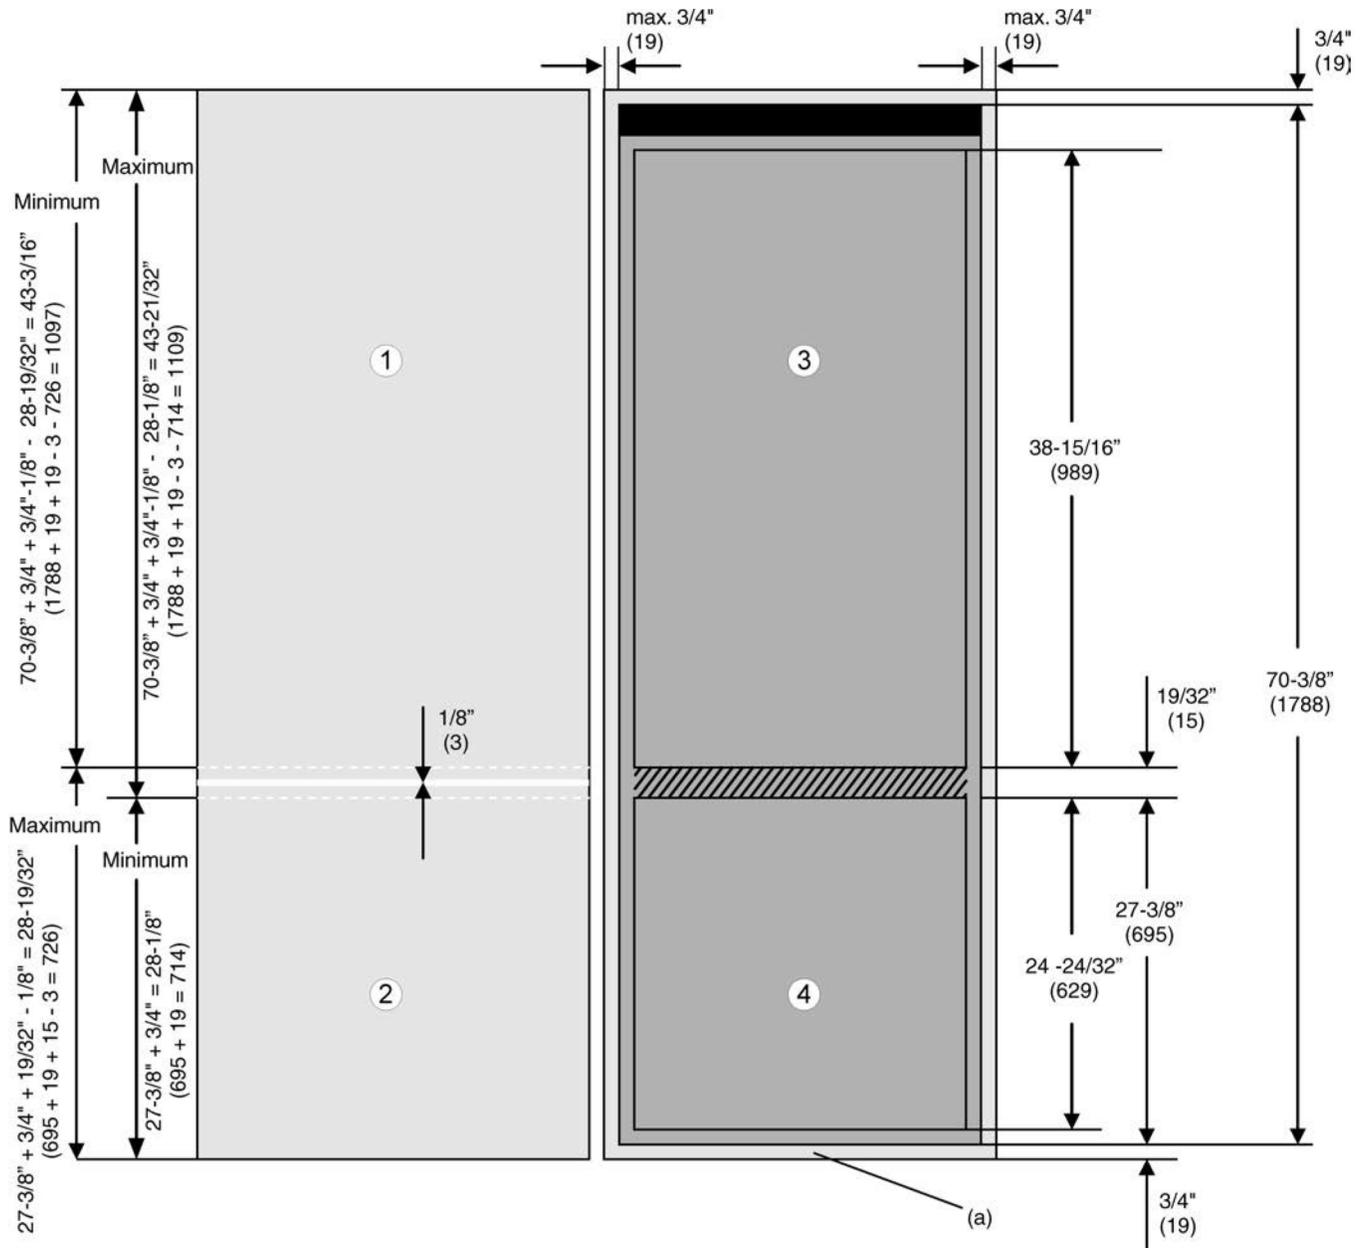

Custom Panel Continued

SPECIFICATIONS	
Custom Panel	Refer to manual for further detail
Maximum Panel Weight	Top Panel - 44 lbs (20 kg) Bottom Panel - 26 lbs (12 kg)
Maximum Panel Thickness	$\frac{3}{4}$ " (19 mm)
Minimum Panel Thickness	$\frac{5}{8}$ " (16 mm)
Inset Panel	
Minimum Vertical Gap - Between Cabinet and Door Panel	$\frac{1}{8}$ " (3 mm)
Minimum Horizontal Gap - Between Top Cabinet Panel and Door, Between Door Panels	$\frac{1}{8}$ " (3 mm)

**Framed Cabinet with Inset Door
Panel Calculation**

$$\text{Panel Width} = \text{Niche Opening Width} - \frac{1}{4}" (6 \text{ mm})$$


$$\text{Panel Height} = \text{Niche Opening Height} - \frac{1}{4}" (6 \text{ mm})$$

**Frameless Style Cabinet Panel
Calculation**

$$\text{Panel Width} = \text{Niche Opening Width} + \text{Left Side Panel Thickness} + \text{Right Side Panel Thickness}$$

$$\text{Panel Height} = \text{Niche Opening Height} + \text{Top Panel Thickness} + \text{Bottom Panel Thickness}$$

INSTALLATION SPECIFICATIONS

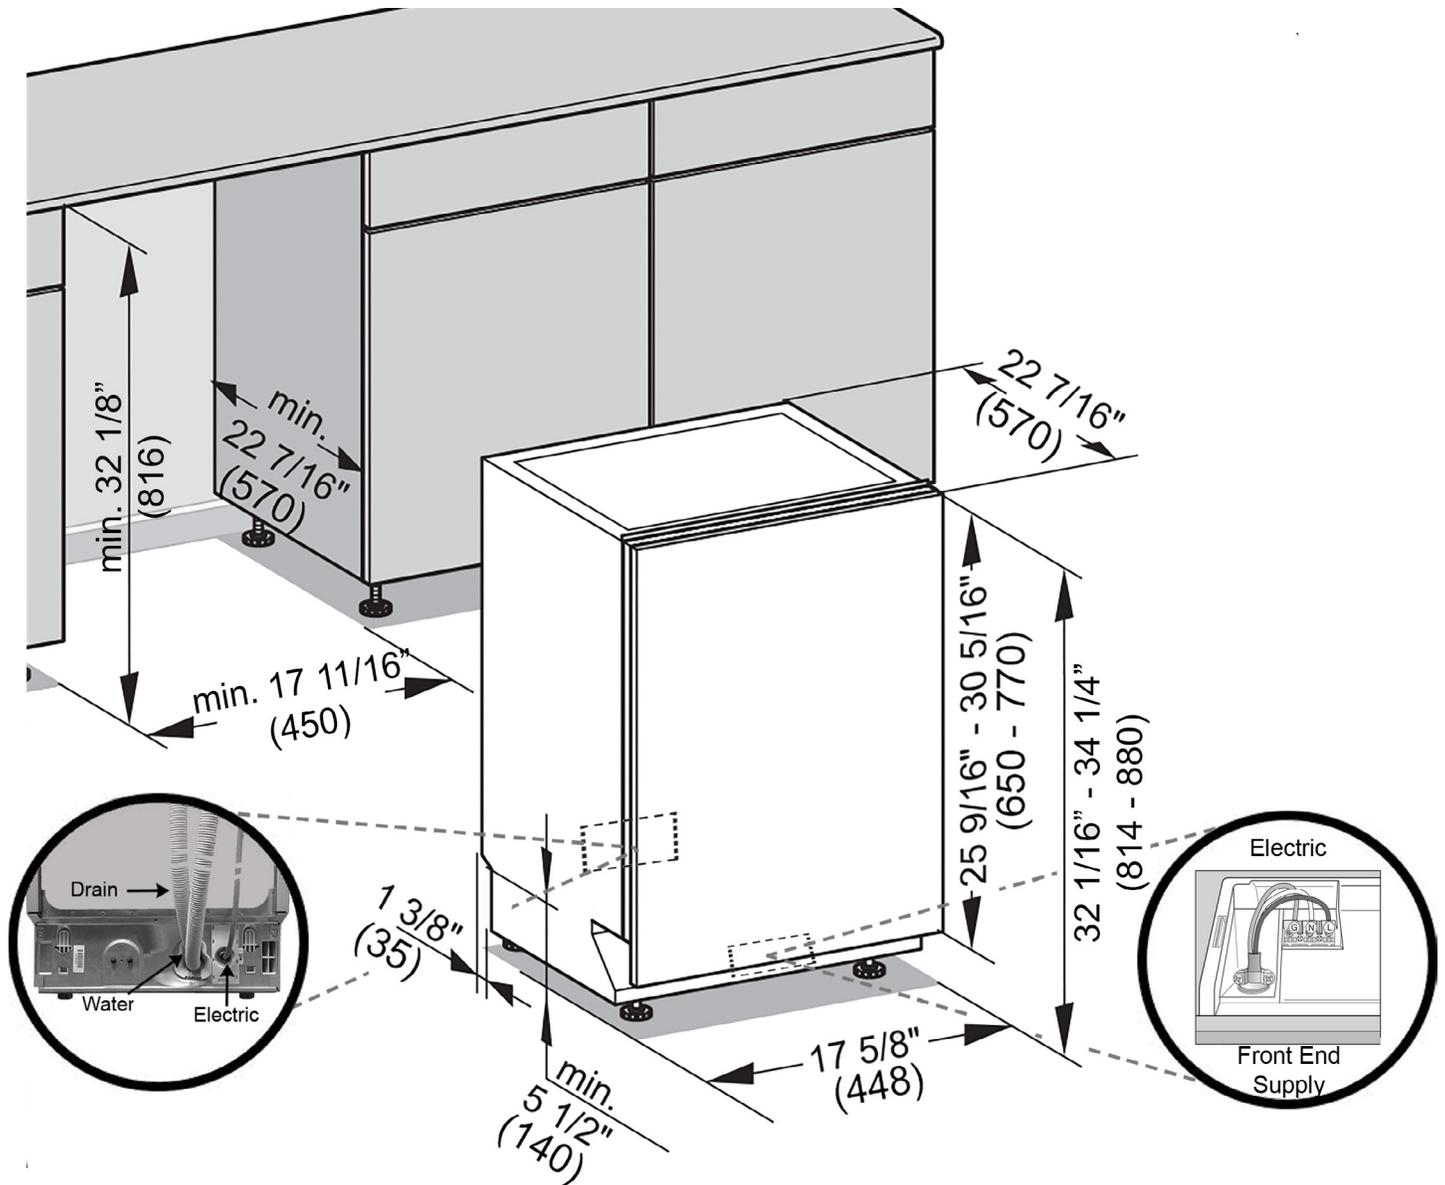


- Drain** - 4 ft 11 in (1.5 m) flexible drain hose.
(Connects from lower center rear)
- Water** - 4 ft 11 in (1.5 m) flexible water intake hose with 3/8" compression fitting.
(Connects from lower center rear)
- Electric** - 4 ft (1.2 m) 120V 15 A 3 wire molded NEMA 5-15 plug power supply.
(Connects via Front End Supply or may be hardwired)

24" Induction Cooktop KM 6320



INSTALLATION DIMENSIONS

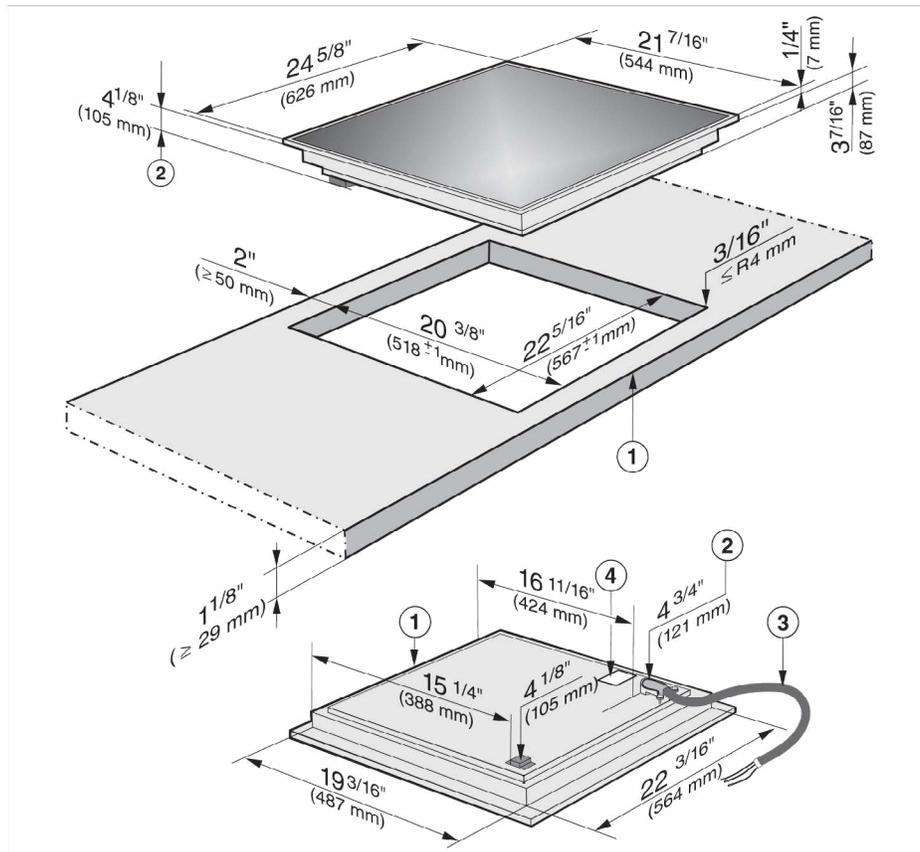


- ① Front
- ② Installation height
- ③ Flexible metal hose with power cord, L = 3' 11¹/₄" (1200 mm)
- ④ Data plate

INSTALLATION SAFETY CLEARANCE

Front Side View
Proud Mount


Framed cooktops

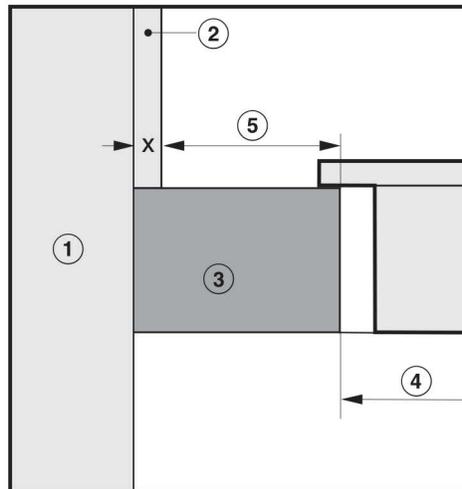

- ① Wall frame
- ② Wall covering dimension x = thickness of the niche cladding
- ③ Countertop
- ④ Countertop cut-out
- ⑤ Minimum distance for
flammable materials 2" (50 mm).
non-flammable materials 2" (50 mm) - dimension x

INSTALLATION

Ventilation

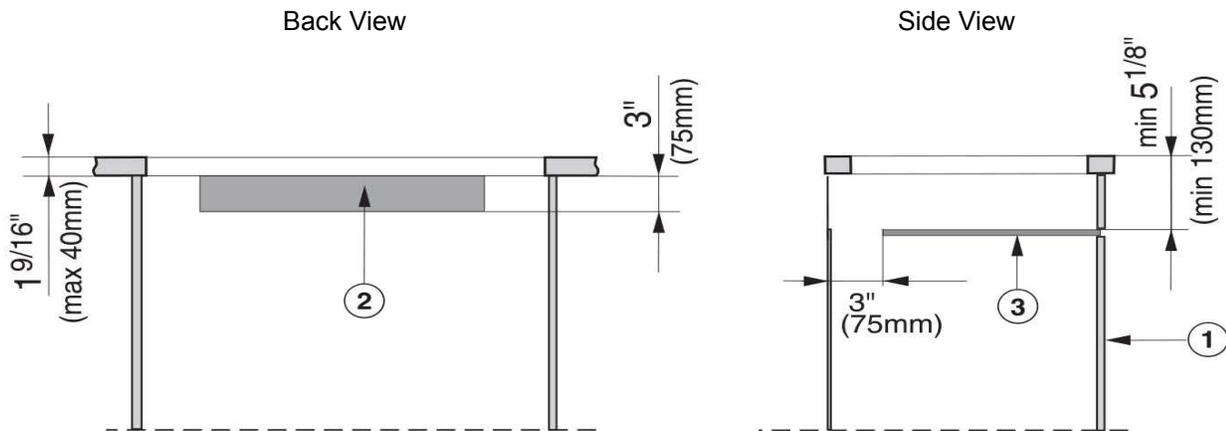


- ① Front of cooktop
- ② Cut-out (57sq-in.) in cabinet for ventilation.
Shown as an example in the rear wall of the cabinet. Measurements: 19" x 3"
(482 x 72 mm)
- ③ Protective base
Installation of a protective base under the cooktop is allowed but not required.
If a protective base is fitted, there must be a clearance of at least $5\frac{1}{8}$ "
(130 mm) between the top of the protective base and the top of the countertop,
for proper ventilation of the cooktop.
At the back there has to be a gap of 3" (75 mm) for the power cord.

PureLine 24" Convection Oven H 6660 BP




PRODUCT VIEWS

Isometric View

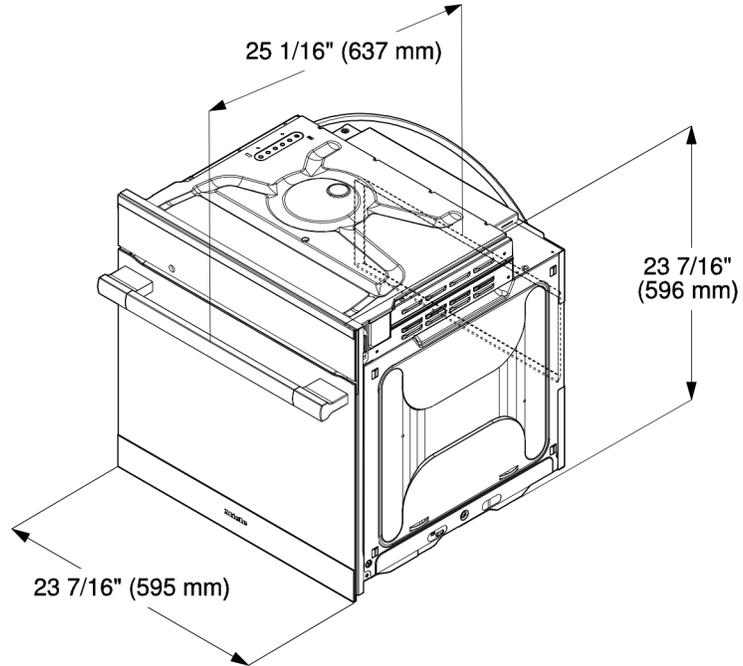

Front View

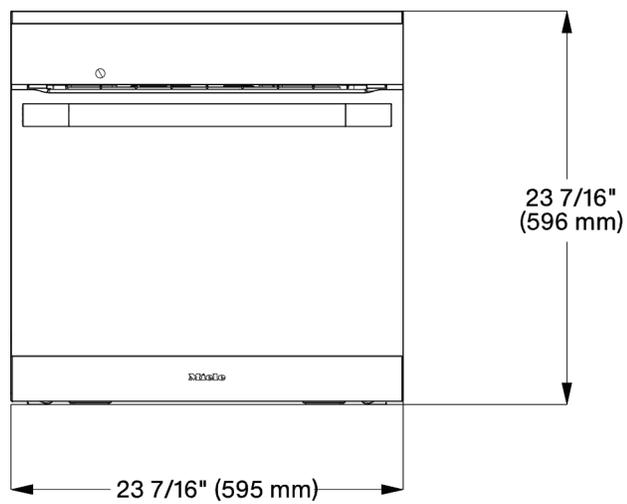


PureLine 24" Convection Oven H 6660 BP




PRODUCT VIEWS

Top View

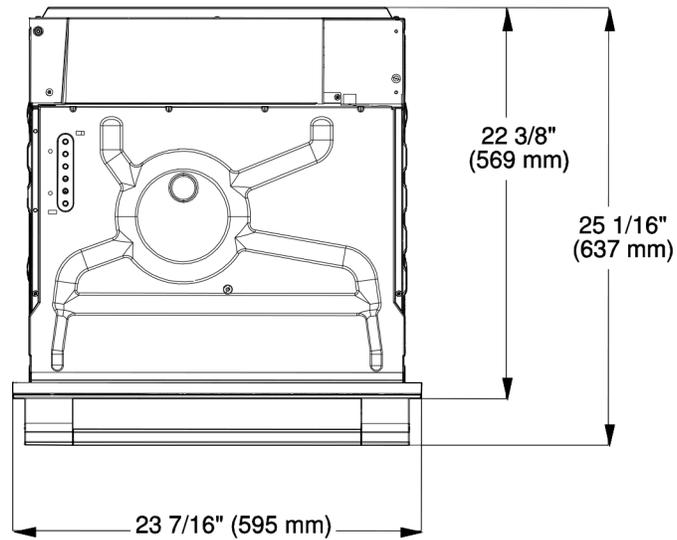


Rear View

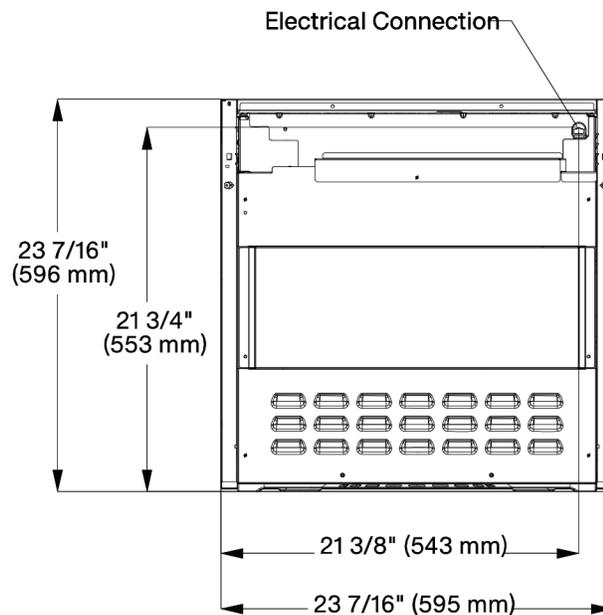


INSTALLATION SPECIFICATIONS


Undercounter Installation

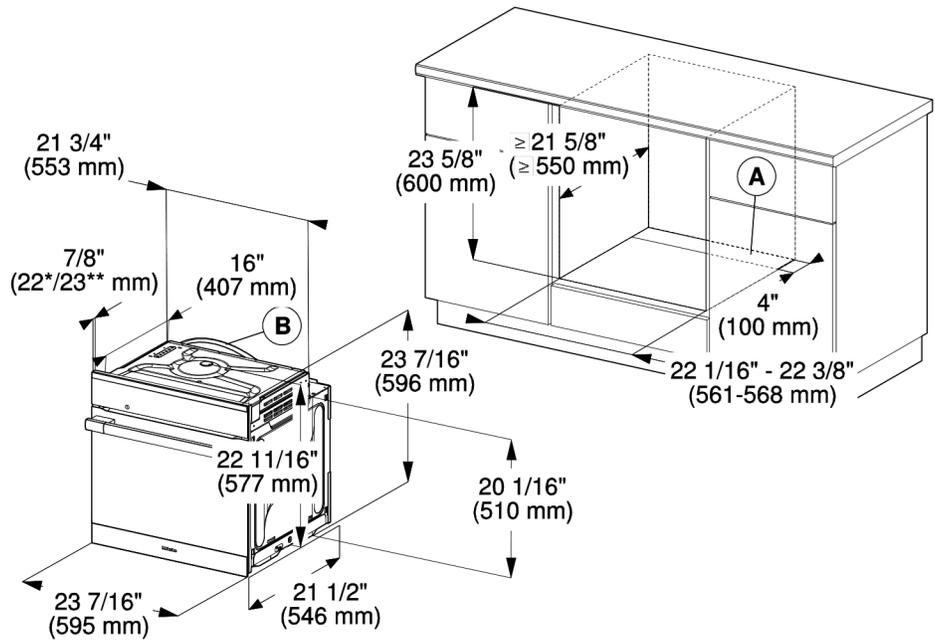

- Ⓐ Cut-out (4" x 22" / 100 mm x 560 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug
- * Oven with glass front
- ** Oven with metal front

Undercounter Installation Front view

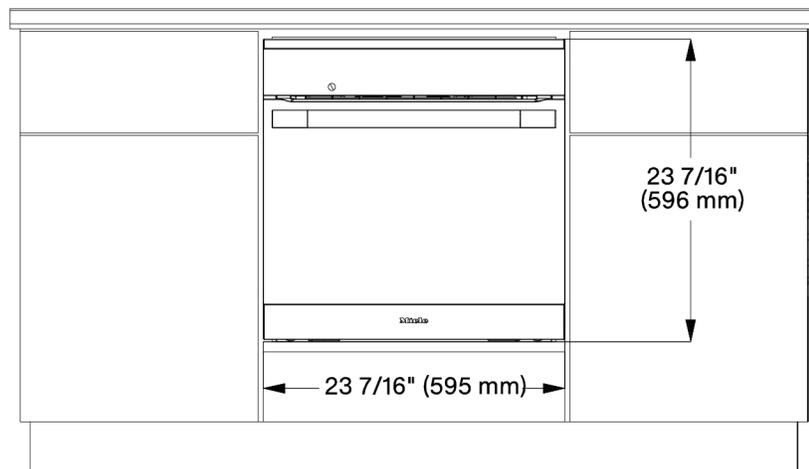

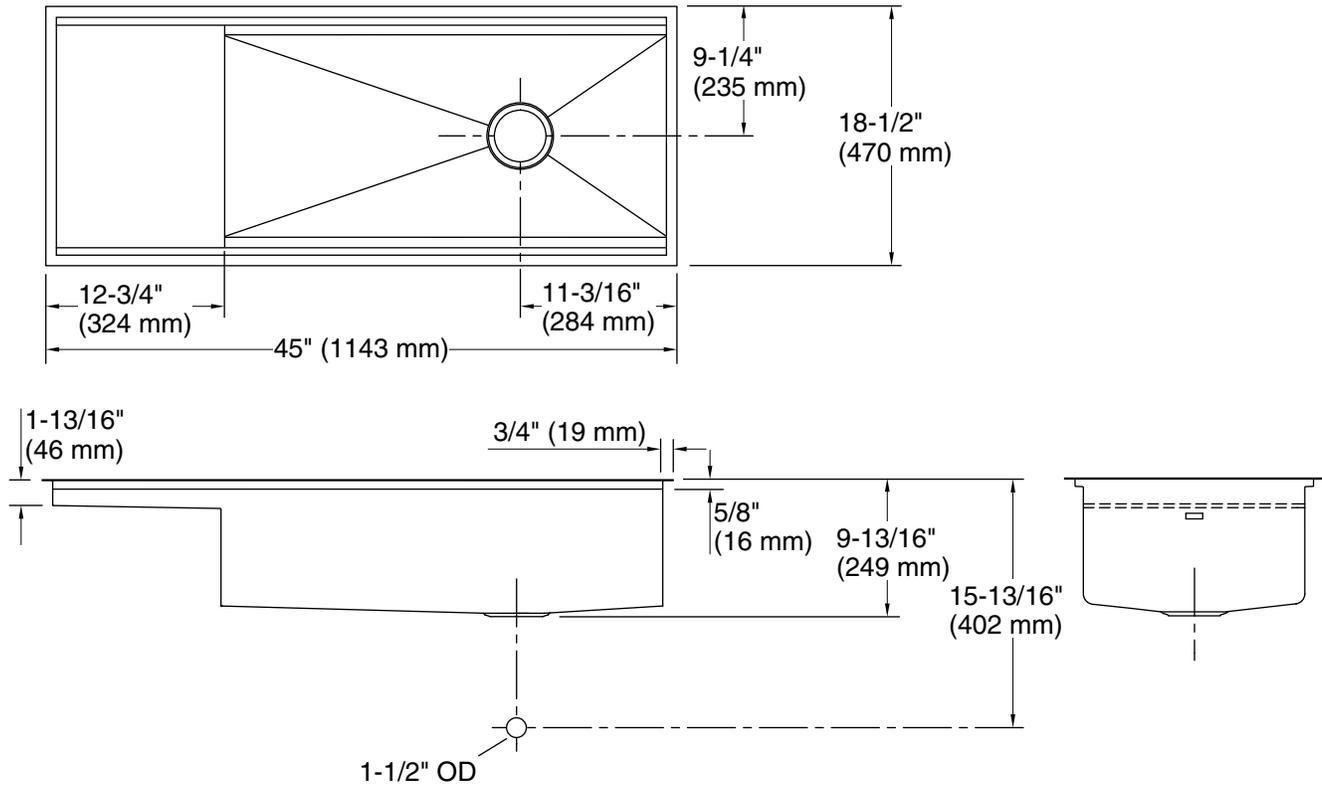

Technical Information

All product dimensions are nominal.

Bowl configuration:	Single
Installation:	Under-mount
Min. base cabinet width:	48" (1219 mm)
Bowl area:	Length: 43-1/2" (1105 mm) Width: 17" (432 mm) Bowl depth: 9-1/2" (241 mm)
Drain hole:	3-5/8" (92 mm)
Template:	1109794-7, required, included

Notes

Install this product according to the installation instructions.