
## DWHD650WPR EMERALD® 6-PROGRAM DISHWASHER CUSTOM PANEL



WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime

#### **DISHWASHER & CUTOUT DIMENSIONS**

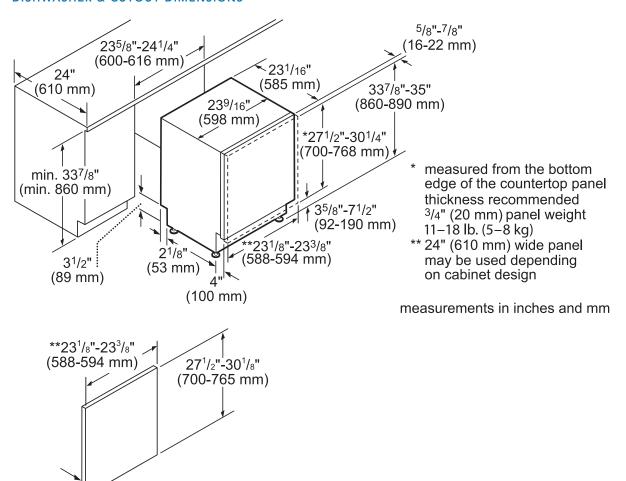

\* thickness recommended <sup>3</sup>/4" (20 mm), panel weight 11–18 lb. (5–8 kg)

\*5/8"-<sup>7</sup>/8" (16-22 mm)

\*\* 24" (610 mm) wide panel may be used depending on cabinet design

#### measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 2 of 2 8 / 20





## **ROHL 2 BOWL STAINLESS STEEL KITCHEN SINK**

**ROHL Kitchen Sinks** 

## **RSS3518**

#### **FEATURES**


- 35 1/4" x 18" x 10" deep (internal dimensions)
- 2 bowls are 17" x 18"
- Fully insulated using "quiet coat" sound deadening technology
- Commercial grade, 16 gauge 18/10 type 304 Stainless Steel
- Zero-edge side walls with "Tangent Edge" easy to clean bottom edge radius
- ISO 9001 certified
- ROHL brand logos
- Standard 3 1/2" drain opening
- Brackets included
- Stainless Copper finish not available
- Brushed Stainless offers a brilliant shine
- 36 3/4" x 19 1/2" x 10" deep (external dimensions)


#### **Colors**

• Brushed Stainless Steel (SB)

#### **WARRANTY**

Limited Lifetime on manufacturer defects

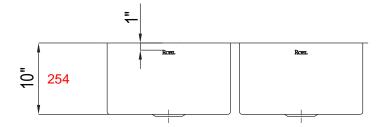

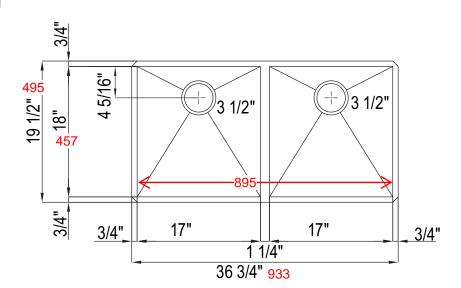

## **T24UW905RP**

### UNDER-COUNTER WINE RESERVE WITH GLASS DOOR

CUSTOM PANEL-READY - RIGHT HINGED







#### Also Available:

T24UW905LP – Left Hinged Custom Panel-Ready

T24UW925LS – Left Hinged with Professional Series Handle

T24UW925RS – Right Hinged with Professional Series Handle

T24UW915LS – Left Hinged with Masterpiece® Series Handle

T24UW915RS – Right Hinged with Masterpiece  $^{\circledR}$  Series Handle

#### **FEATURES & BENEFITS**

- Dual zone wine storage with adjustable temperature zones
- Full-extension wine racks
- UV resistant tempered glass door
- $SoftClose^{\scriptsize{\circledR}}$  door hinges for ultra-smooth closing of the door
- LED theater lighting
- Touch electronic controls for precise temperature management

GENERAL PROPERTIES	
Custom Panel-Ready	Yes
UV Resistant Glass Door	Yes
Reversible Door Swing	Left and Right Available
SoftClose® Door Hinges	Yes
Lighting	Adjustable LED Lighting
Bottle Shelves	6
Shelf Material	Wenge Triangular Hardwood dowels w/ Aluminum Front Caps
Full Extension Wine Racks	Yes
Dual Zone Wine Storage	Yes
Door Open Alarm	Yes
Touch Electronic Controls	Yes
STAR-K Certified Sabbath Mode	Yes
CAPACITY	
Number of Bottles	41
TEMPERATURE RANGES	
Upper Zone	40°F (3°C) to 54°F (12°C)
Lower Zone	40°F (4.5°C) to 64°F (18°C)
TECHNICAL DETAILS	
Watts (W)	150 W

TECHNICAL DETAILS	
Watts (W)	150 W
Current (A)	15 Amp
Volts (V)	115 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	60"
Plug Type	120V 3-Wire
DIMENSIONS & WEIGHT	

DIMENSIONS & WEIGHT	
Appliance Dimensions (H x W x D) (in.)	34 <b>3/8</b> "* × 23 <b>7/8</b> " × 23 <b>5/8</b> "
Required Cutout Size (H x W x D) (in.)	34 <b>1/2</b> "-35 <b>1/4</b> " × 24" × 24"
Net / Gross Weight (lbs.)	140 / 151 lbs.
EFFICIENCY	
Annual Energy Consumption	155 kWh
MADDANTY	

#### WARRANTY

Limited, Entire Appliance, Parts and Labor on any Part of the Refrigerator that Fails Because of a Manufacturing Defect

#### 2 Year

Limited Warranty for Sealed Refrigeration System\*\*; Parts and Labor

Limited Warranty for Sealed Refrigeration System\*; Parts Only

#### 7th to 12th Year

3rd to 6th Year

- \*Height adjustable + 1/2" (13 mm) with legs fully extended
- \*\*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

Page 1 of 4 5 / 22


## T24UW905RP

#### UNDER-COUNTER WINE RESERVE WITH GLASS DOOR







#### **GLASS DOOR WINE RESERVE PRODUCT DIMENSIONS**

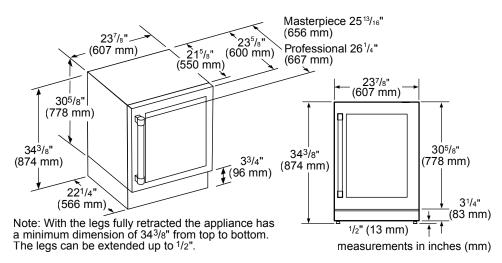


#### **GLASS DOOR WINE RESERVE CUTOUT DIMENSIONS**






#### GLASS DOOR WINE RESERVE CUTOUT DIMENSIONS & ELECTRICAL LOCATION



A: Recommended area for installation connection - a 2<sup>1</sup>/2" (63 mm) diameter hole is recommended. Location of power cord at base of the appliance.



For flush installation, recommend outlet to be placed to the side of the unit and not directly behind.


measurements in inches (mm)

Page 2 of 4 5 / 22




#### **GLASS DOOR WINE RESERVE CUTOUT & DOOR SWING DIMENSIONS**

**CUSTOM PANEL-READY - RIGHT HINGED** 

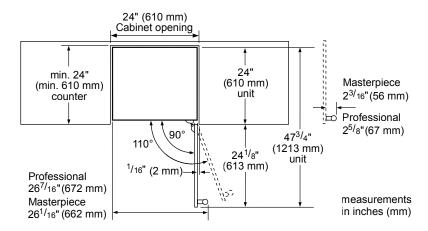

#### GLASS DOOR WINE RESERVE SIDE-BY-SIDE INSTALLATION

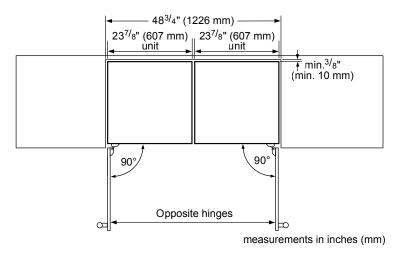

Page 3 of 4 5 / 22


## T24UW905RP UNDER-COUNTER WINE RESERVE WITH GLASS DOOR



**CUSTOM PANEL-READY – RIGHT HINGED** 

#### GLASS DOOR WINE RESERVE CUSTOM PANEL OVERLAY DIMENSIONS

#### Overlay Panel - Rear View



#### Important:


- The thickness of the overlay panel must be <sup>3</sup>/<sub>4</sub>" (19 mm).
- Overlay panel must not weigh more than 10 lbs (4.54 kg).
- Overlay panel weighing more than recommended may cause damage to your appliance.
- To install the panel, use only the screws included in the "Installation Kit".

Create the custom overlay panel using the dimensions shown.

#### Important:

The following graphics show a custom panel for a door with hinges installed on the right-hand side. If your unit has hinges installed on the left-hand side, rotate the custom panel 180° so the markings will be on the left.

#### measurements in inches (mm)



#### **ACCESSORIES (OPTIONAL)**

#### **HANDLES**

NOTE: Choose one handle for each glass door custom-panel ready model.



MS22HNDL25

PR22HNDL25 Professional Series Handle (25 13/16" wide)

Masterpiece® Series Handle (25 1/2" wide)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.


 $1\,800\,735\,4328 \mid USA\,THERMADOR.COM\mid CANADA\,THERMADOR.CA\mid @2022\,BSH\,HOME\,APPLIANCES\,CORPORATION.\,ALL\,RIGHTS\,RESERVED.$ 


Page 4 of 4 5 / 22

#### **PROFESSIONAL SERIES**



#### **INSTALLATION DETAILS**

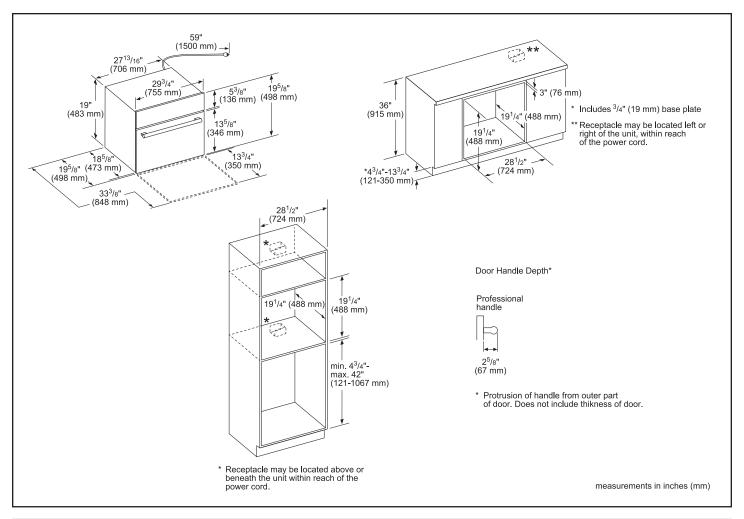

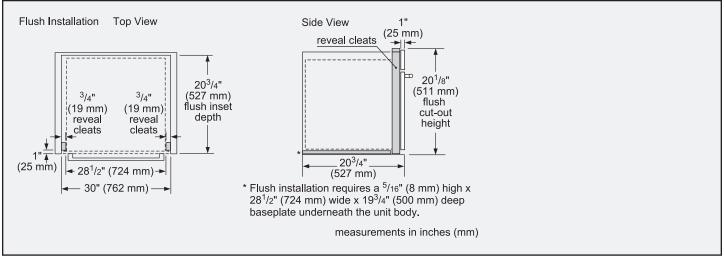


Page 2 of 4 09 / 20


# PODMCW31W 30-INCH TRIPLE COMBINATION BUILT-IN OVEN WITH SPEED OVEN



**PROFESSIONAL SERIES** 

#### 30-INCH TRIPLE COMBINATION OVEN WITH SPEED OVEN AND WARMING DRAWER

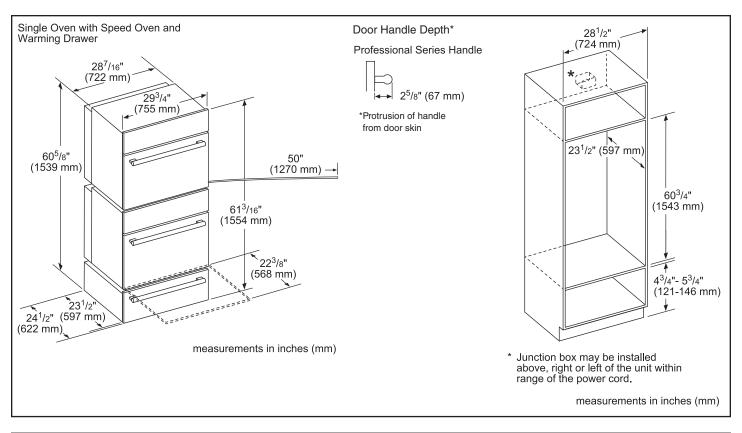

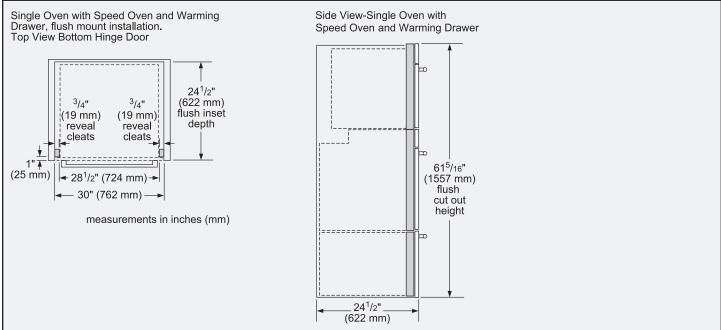

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

 $1\,800\,735\,4328 \mid USA\,THERMADOR.COM\mid CANADA\,THERMADOR.CA\mid @2020\,BSH\,HOME\,APPLIANCES\,CORPORATION.\,ALL\,RIGHTS\,RESERVED.$ 

Page 2 of 2 2 / 20

# T301F905SP 30-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER




FREEDOM® COLLECTION, PANEL-READY

WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

<sup>\*</sup>Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

#### **CUTOUT DIMENSIONS**




#### Furniture return

**A:** Area for installation of power connection.


**B:** Area for running the water line. It is recommended that the waterbox is placed adjacent to the installation cavity, so that it can be accessed for service without uninstalling the appliance. If this is not possible, place the recessed waterbox adjacent to the water supply socket elevated at the heights as referenced in areas A and B.

**C:** Niche depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel.

Stainless steel models contain a panel-ready base unit, ready-to-install stainless steel door(s) with a right or left door swing and handle(s).




#### **TOP VIEW CLEARANCE**

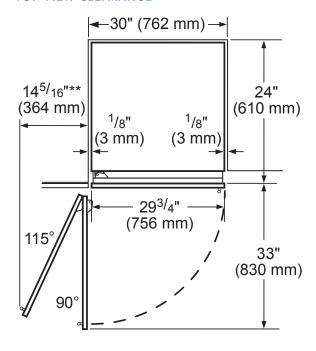

- \*\* Door handle must be added to this dimension
- \* Depends on the thickness of the unit door.

  | 3/4" (19 mm) refers to the stainless steel door. (special accessory).




Page 2 of 3 3 / 21

## T301F905SP 30-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER



FREEDOM® COLLECTION, PANEL-READY

#### PRODUCT AND PANEL DIMENSIONS

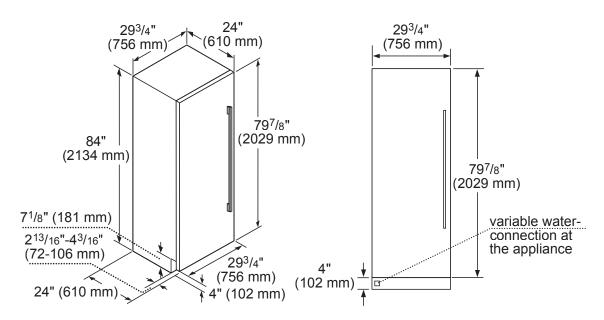

#### **ACCESSORIES (OPTIONAL)**

#### FLAT STAINLESS STEEL DOOR PANELS

30-Inch Flat Stainless Steel Door Panel Without Dispenser



#### TFL30IR800

For use with Handle

#### TFL30IR905

Handleless

#### **STORAGE**



#### **ICEBUCKETL**

Large Ice Bucket

#### FRAMEKIT10

Freedom® Frame Kit

For any custom column installation in 24-inch deep cutouts. With two metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns.

#### **HANDLES**

Choose between two options:

#### PR36HNDL20

36-Inch Professional Series Handle

or

#### MS36HNDL20

36-Inch Masterpiece® Series Handle

#### **FILTERS**



#### REPLFLTR55

Freedom® Water Filter Replacement water filter for use in all freezer and bottom freezer models



#### **HEATRKIT20 - 13W @ 120V**

Freedom® Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this sealing kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

 $1\,800\,735\,4328 \mid USA\,THERMADOR.COM\mid CANADA\,THERMADOR.CA\mid @2021\,BSH\,HOME\,APPLIANCES\,CORPORATION.\,ALL\,RIGHTS\,RESERVED.\,AUCTOR (CORPORATION)$ 

Page 3 of 3 3 / 21

#### 30-INCH BUILT-IN FRESH FOOD COLUMN







WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

 $<sup>{}^{\</sup>star}\mathsf{Sealed}\ \mathsf{refrigeration}\ \mathsf{system}\ \mathsf{includes}\ \mathsf{compressor},\ \mathsf{evaporator},\ \mathsf{condenser},\ \mathsf{dryer}\ \mathsf{/}\ \mathsf{strainer}\ \mathsf{and}\ \mathsf{connection}\ \mathsf{tubing}$ 

#### **CUTOUT DIMENSIONS**

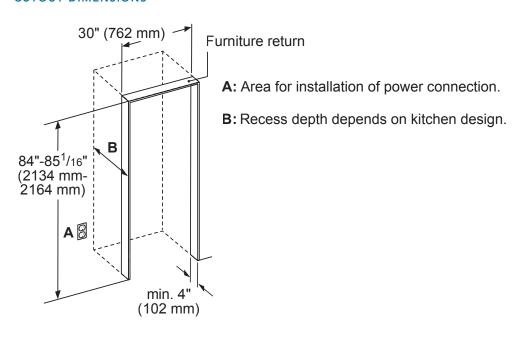

#### **TOP VIEW CLEARANCE**

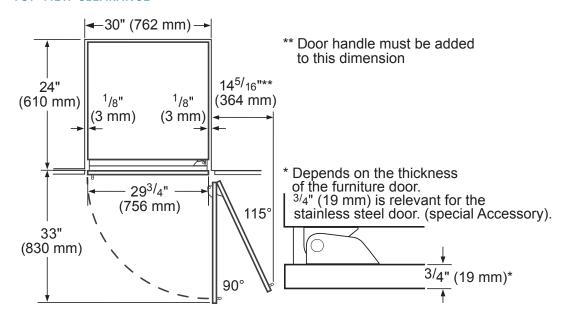

Page 2 of 3 3 / 21


## T301R905SP

#### 30-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY



#### PRODUCT AND PANEL DIMENSIONS

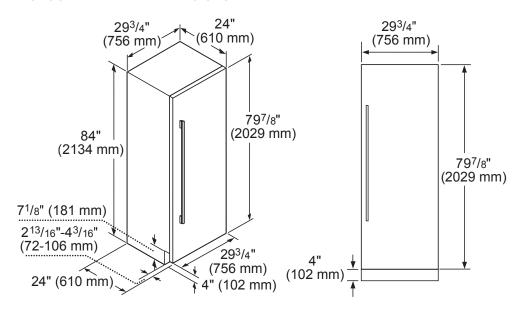

#### **ACCESSORIES (OPTIONAL)**

#### FLAT STAINLESS STEEL DOOR PANELS

30-Inch Flat Stainless Steel Door Panel



TFL30IR800
For use with Handle
TFL30IR905
Handleless

#### **HANDLES**

Choose between two options:

## PR36HNDL20

36-Inch Professional Series Handle

or

#### MS36HNDL20

36-Inch Masterpiece® Series Handle

#### **STORAGE**



LPRODBIN10
Large Produce Bin



**30PRODRAIL**30-Inch Produce Railing



**30HFGALBIN** 30-Inch Half Gallon Bin

#### FRAMEKIT10

Freedom® Frame Kit
For any custom column installation
in 24-inch deep cutouts. With two
metal side trims whose placement
between the interior cutout wall and
the appliance helps overcome the
challenge of unfinished cabinet returns.



#### **HEATRKIT20 - 13W @ 120V**

Freedom® Heater Kit When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this sealing kit is included. For all other (nontraditional, i.e. two wine columns, two bottom freezers, etc.) sideby-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

 $1\,800\,735\,4328 \mid USA\,THERMADOR.COM\mid CANADA\,THERMADOR.CA\mid @2021\,BSH\,HOME\,APPLIANCES\,CORPORATION.\,ALL\,RIGHTS\,RESERVED.\,AUCTOR (CORPORATION)$ 

Page 3 of 3 3 / 21

## PCG486WL

## 48-INCH GAS RANGETOP WITH GRILL

PROFESSIONAL SERIES, PORCELAIN COOKTOP SURFACE



#### **ACCESSORIES (OPTIONAL)**



PAGRIDDLEW 12" Pro Griddle Plate with Fusion Coating



PAGRIDDLE Griddle Sits on Top of Grates Over 2 Star Burners



PA12LCVRW 12" Pro Grill Cover



PA12CHPBLK 12" Cutting Board



PWOKRINGHC Wok Ring



PA48WLBC 10" Low Backguard



PAKNOBLUWR Metallic Blue Knob Kit



PABRICKBKW Flat Ceramic Briquettes with Basket




PABRICKW Flat Ceramic Briquettes without Basket



PALPKITHW LP Conversion Kit, Pro Rangetops (4 & 6 Burners)

#### **48" RANGETOP SIDE VIEW**

measurements in inches (mm)

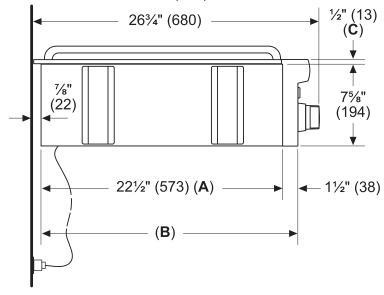

- A: Cabinet face for installation with projecting control panel.
- **B**: Cabinet face for installation with flush control panel.
- C: Side flange

Page 2 of 5 10 / 19

## PCG486WL


## 48-INCH GAS RANGETOP WITH GRILL

PROFESSIONAL SERIES, PORCELAIN COOKTOP SURFACE



#### **48-INCH RANGETOP CUTOUT DIMENSIONS**

\* Minimum recommended hood width equals that of the range or cooktop.

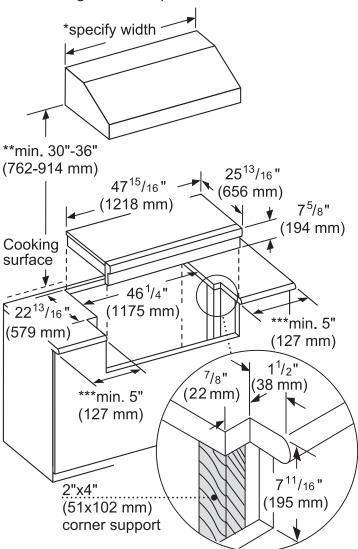

- \*\* 36" minimum clearance from cooking surface to combustible surfaces.\*\*\* 5" minimum clearance from cooking surface
- \*\*\* 5" minimum clearance from cooking surface to combustible side wall.

Note: Most hoods contain combustible components that must be considered when planning the installation.

measurements in inches (mm)

Page 3 of 5 10 / 19

## PCG486WL

### 48-INCH GAS RANGETOP WITH GRILL


PROFESSIONAL SERIES, PORCELAIN COOKTOP SURFACE



#### **48-INCH RANGETOP GAS LOCATION**

The gas and electrical supply must be located in an area that is accessible without requiring removal of the rangetop. The appliance electrical power cord and gas pipe connection are located on the left rear underside of the rangetop.

The junction box must be located within 3 feet (~900 mm) of the rangetop connection.

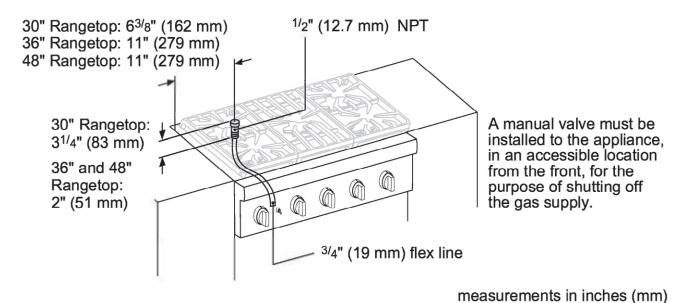

#### NATURAL GAS REQUIREMENTS:

Inlet Connection: 1/2" NPT (min. 3/4" dia. flex line)

Supply Pressure: 6" min. to 14" max. water column (14.9 mb to 34.9 mb)

Manifold Pressure: 5" water column (12.5 mb)

#### PROPANE GAS REQUIREMENTS:

Inlet Connection: 1/2" NPT (min. 3/4" dia. flex line)

Supply Pressure: 11" min. to 14" max. water column (27.4 mb to 34.9 mb)

Manifold Pressure: 10" water column (24.9 mb)

#### **ELECTRICAL SUPPLY**

IMPORTANT: The cord supplied with gas rangetops having an electric griddle or grill requires a NEMA 5-20 receptacle as shown here. Local codes my require a different wiring method.

NEMA 5-20 RECEPTACLE





**WARNING:** This appliance is equipped with a three-prong grounding plug for protection against shock hazard and should be plugged directly into a properly grounded receptacle. DO NOT cut or remove the grounding prong from this plug. DO NOT ALTER THIS PLUG.


Page 4 of 5 10 / 19

## PCG486WL 48-INCH GAS RANGETOP WITH GRILL

PROFESSIONAL SERIES, PORCELAIN COOKTOP SURFACE



48-INCH RANGETOP CLEARANCES

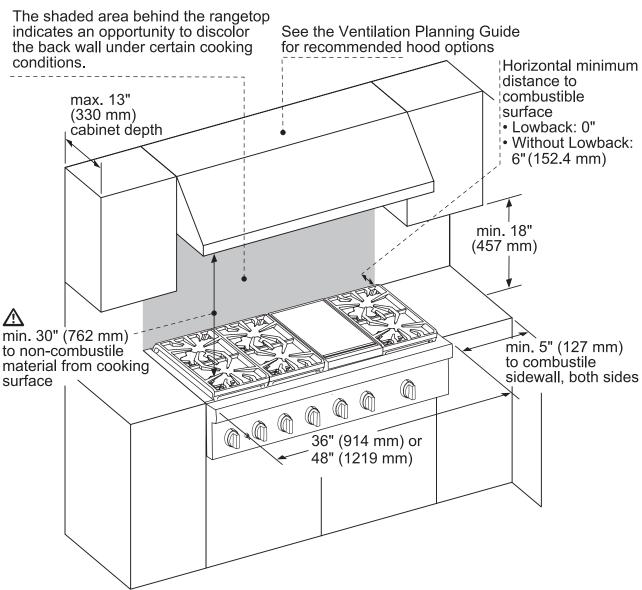

⚠ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances must be approved by the local codes and/or by the local authority having jurisdiction.

#### measurements in inches (mm)

**NOTE:** A 36-inch minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal cabinet is protected by not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2019 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.


Page 5 of 5 10 / 19

## HPIN54WS 54-INCH BOX ISLAND HOOD

PROFESSIONAL® SERIES



#### **HOOD DIMENSIONS**



measurements in inches (min

Page 2 of 5 10 / 21