




Built-In Model BI-30U

Overall Dimensions

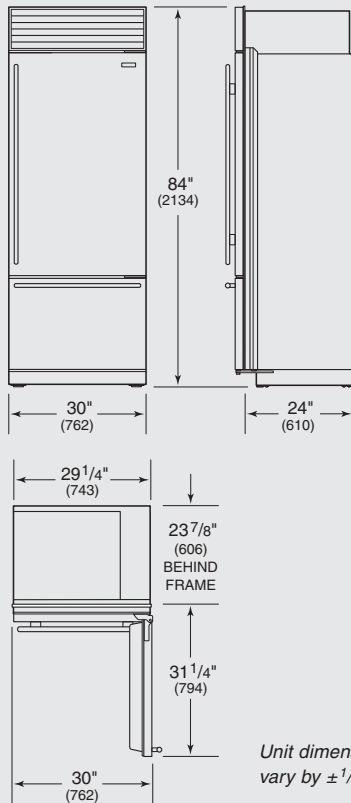

Specifications

Overall Dimensions	30"W x 84"H x 24"D
Door Clearance	Standard 31 1/4" Flush Inset 31 3/4"
Opening Width	29 1/2"
Flush Inset Width	32"
Opening Height	83 3/4"
Flush Inset Height	84"
Opening Depth	24"
Flush Inset Depth	26 3/16"
Electrical Requirements	115 V AC, 60 Hz 15 amp circuit
Plumbing Requirements	1/4" OD copper line 30–100 psi
Shipping Weight	430–462 lbs

Installation Notes

Built-In models may be used in a standard installation or in a flush inset installation which allows the unit to be flush with surrounding cabinetry.

Built-In over-and-under models with opposite hinges can be used in a dual installation.


Complete installation specifications, including panel sizes, can be found on our website, subzero.com.

Installation Specifications

Standard Installation

*Anti-tip bracket must not interfere with water line. Extend water line approximately 36" from back wall.


Dimensions in parentheses are in millimeters unless otherwise specified.

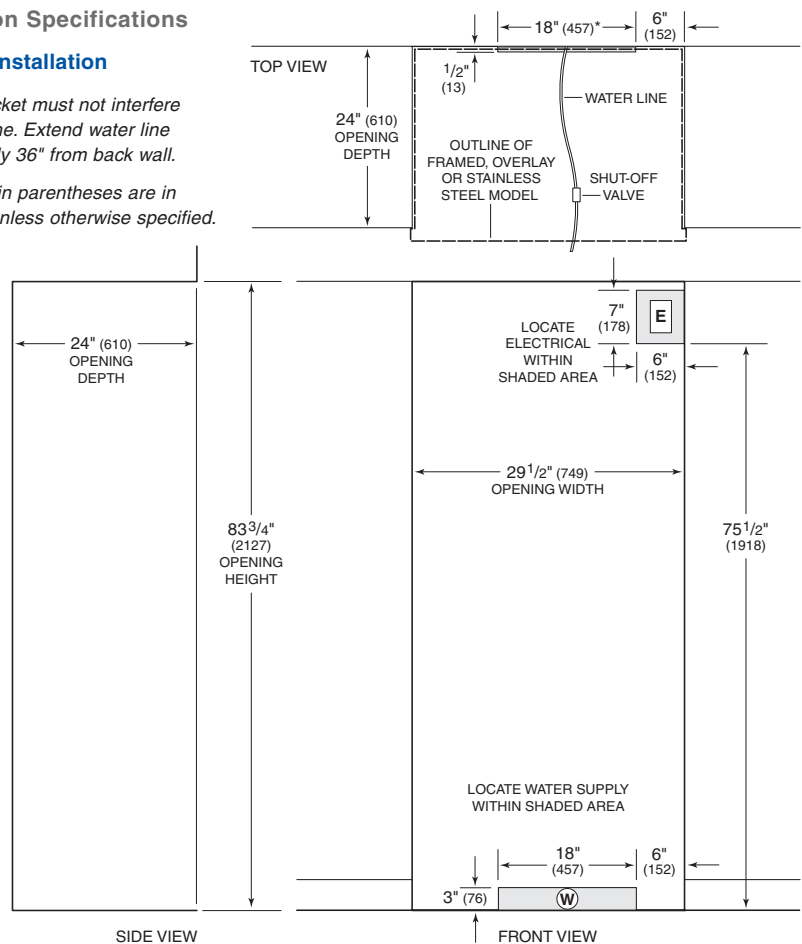


Flush Inset Installation

*Anti-tip bracket must not interfere with water line. Extend water line approximately 36" from back wall.

**Dimensions based on 3/4" (19) panels.

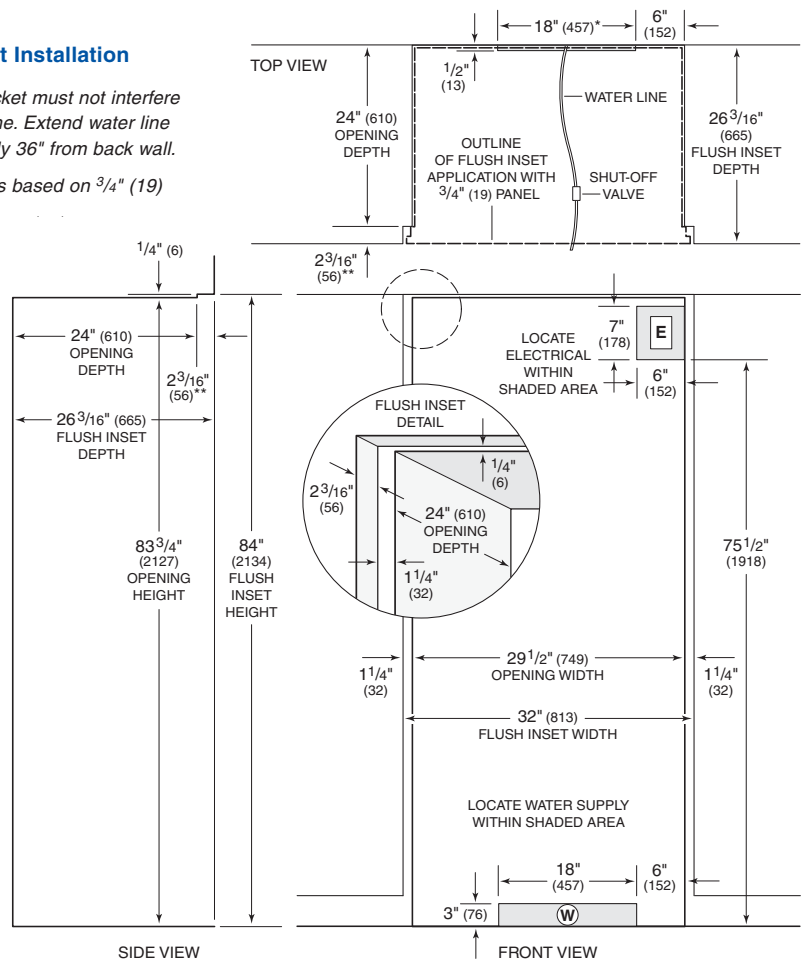

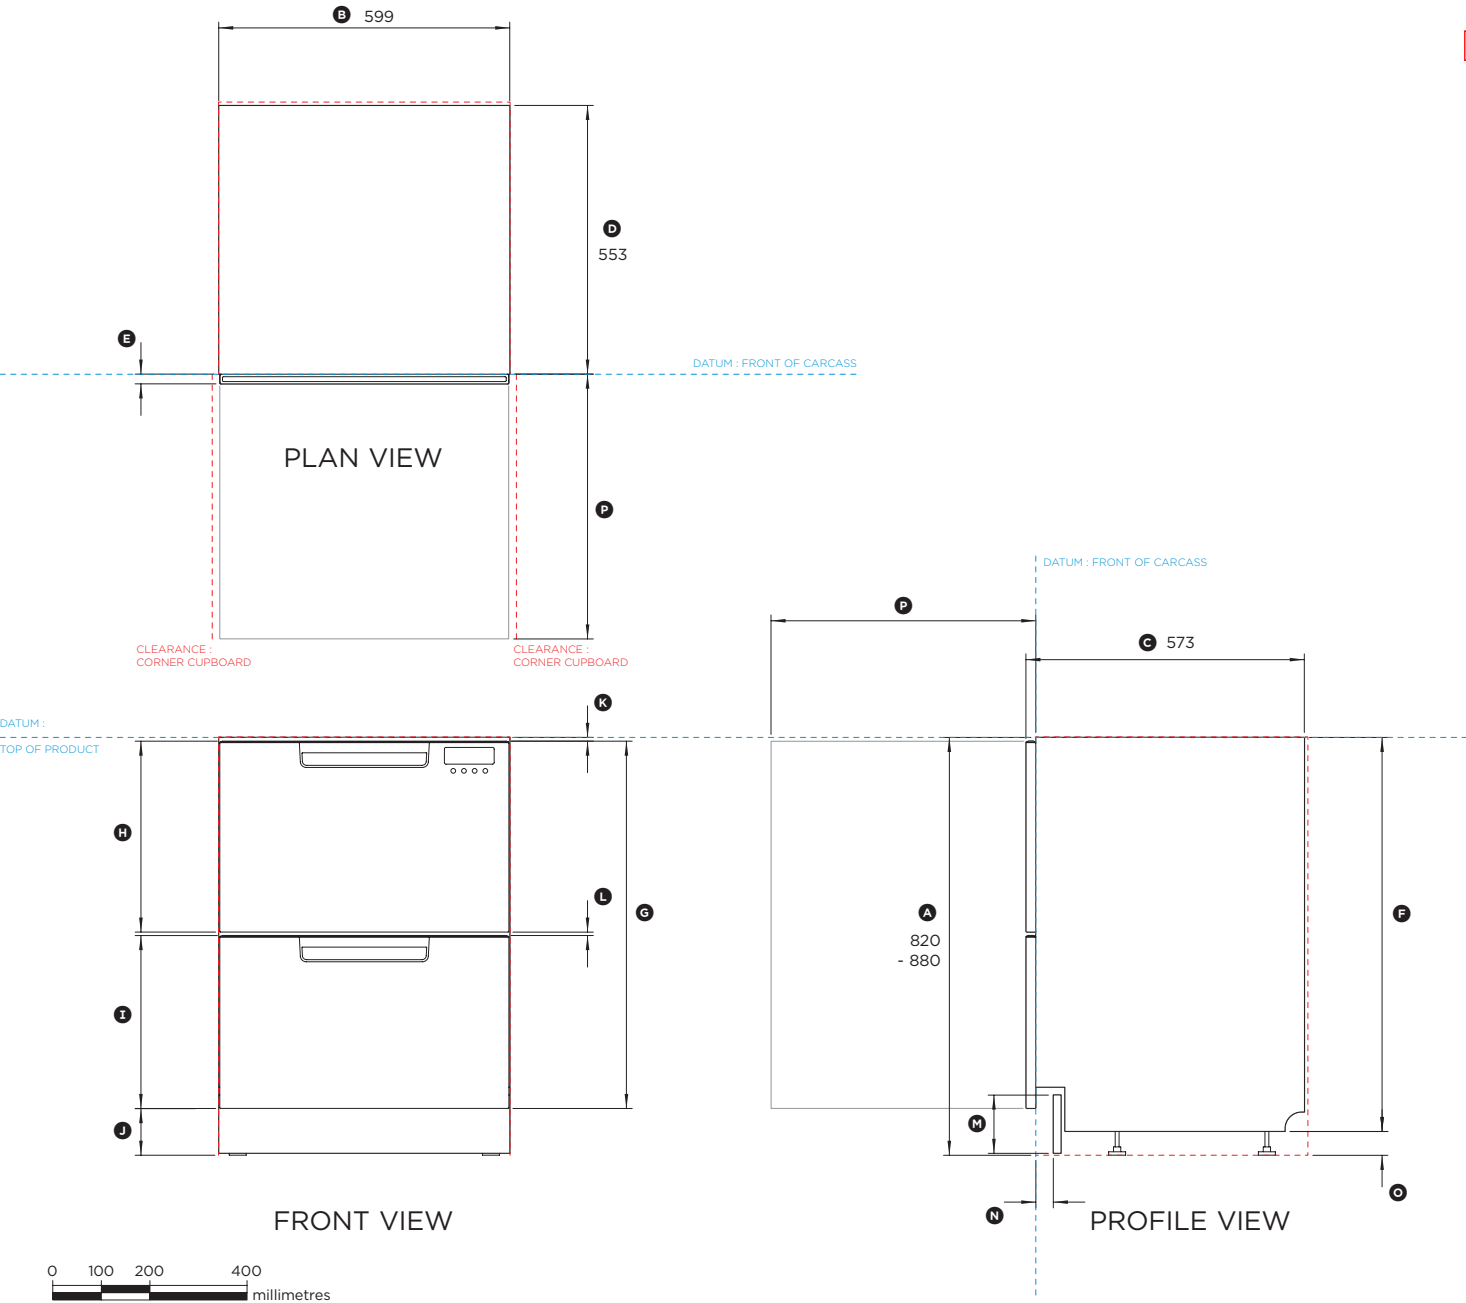

Model no:

DD24DAX9

(refer page 1 for imperial measurements)

Dimensions	mm
Ⓐ Overall height* of DishDrawer™	820 - 880
Ⓑ Overall width of DishDrawer™	599
Ⓒ Overall depth of DishDrawer™	573
Ⓓ Depth of chassis	553
Ⓔ Depth of front panel	20
Ⓕ Height of chassis	811
Ⓖ Height of drawer fronts	756
Ⓖ Height of upper front panel	393
Ⓖ Height of lower front panel	356
Ⓖ Height from floor to bottom of lower front panel	56-116
Ⓖ Height from top of front panel to top of chassis	8
Ⓖ Ventilation gaps between panels	7
Ⓖ Height of toe kick panel	72 - 127
Ⓖ Depth of toe kick recess	38 - 102
Ⓖ Height of adjustable levelling feet	9 - 69
Ⓖ Maximum extension of drawer from front datum	547

* includes mounted feet

Minimum Clearances	mm
Height of cavity	min 820
Width of cavity	600
Depth of cavity	min 560
Minimum clearance from a corner cupboard	13

Note: Service outlet at rear extends both sides, hoses and cords can be routed to either or both.

INDICATES CABINETRY / PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----

DATE: 07.09.2016


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit www.fisherpaykel.com




PRODUCT SPECIFICATIONS

Model	DF304
Dimensions	29 7/8"W x 36 7/8"H x 29 1/2"D
Oven 1 Interior Dimensions	25"W x 16 1/2"H x 19"D
Oven 1 Usable Capacity	2.8 cu ft
Oven 1 Overall Capacity	4.5 cu ft
Door Clearance	19 1/2"
Weight	325 lb
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	30 amp dedicated circuit
Gas Supply	3/4" rigid pipe
Gas Inlet	1/2" NPT female


ELECTRICAL AND GAS



DIMENSIONS

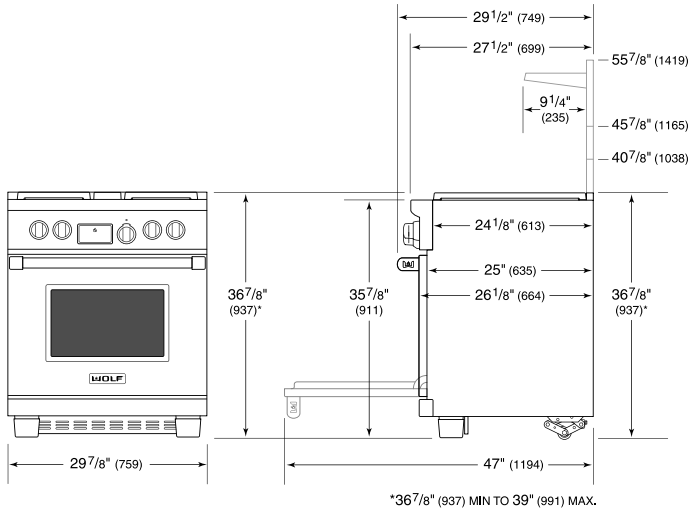

STANDARD INSTALLATION

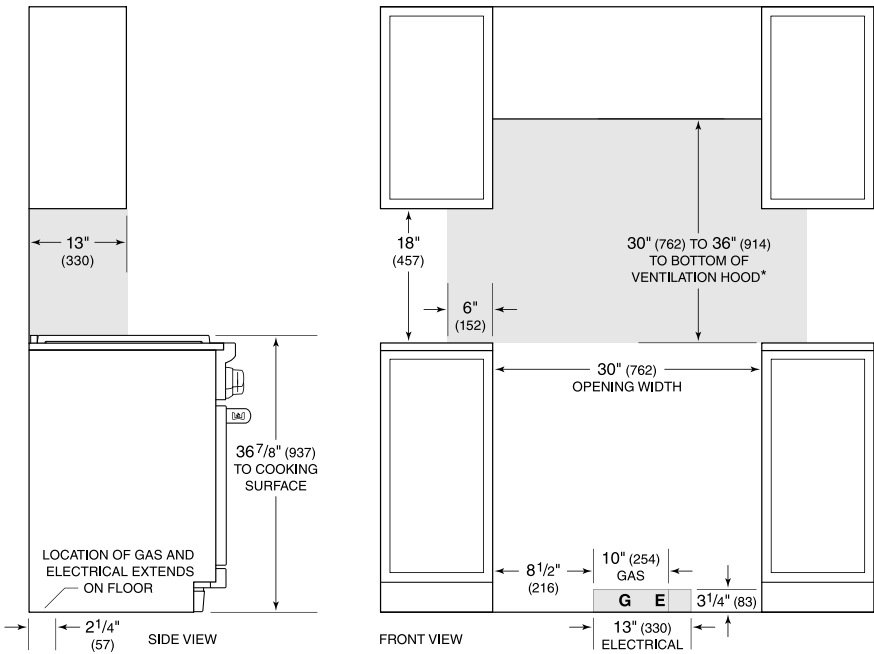

*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials.
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.



MICROWAVE HOODS

RVMH330 – 30" WIDE – CONVENTIONAL

RVMHC330 – 30" WIDE – CONVECTION



DESCRIPTION	30" WIDE MICROWAVE HOODS		
	RVMH330	RVMHC330	
Overall Width	30" (76.2 cm)		
Overall Height	16 1/2" (41.9 cm)	16 11/32" (41.5 cm)	
Overall Depth	15 1/2" (39.4 cm)	15 9/32" (38.8 cm)	
Electrical Requirements	120VAC/60Hz		
Maximum Amp Usage	1.6kW, 13.0 amps		
Oven Interior Dimensions	Width – 16 3/4" (42.5 cm) Height – 9 1/4" (23.5 cm) Depth – 14" (35.6 cm) Overall Size – 1.5 cu. ft.	Width – 17 1/8" (43.5 cm) Height – 8 1/16" (20.5 cm) Depth – 13 13/16" (35.1 cm) Overall Size – 1.1 cu. ft.	
Approximate Shipping Weight	85 lb. (38.6 kg)	71 lb. (32.2 kg)	

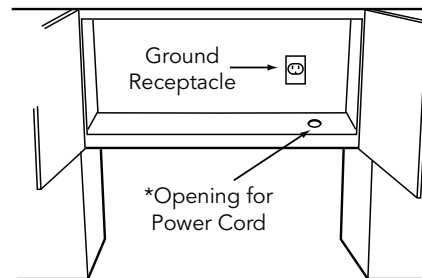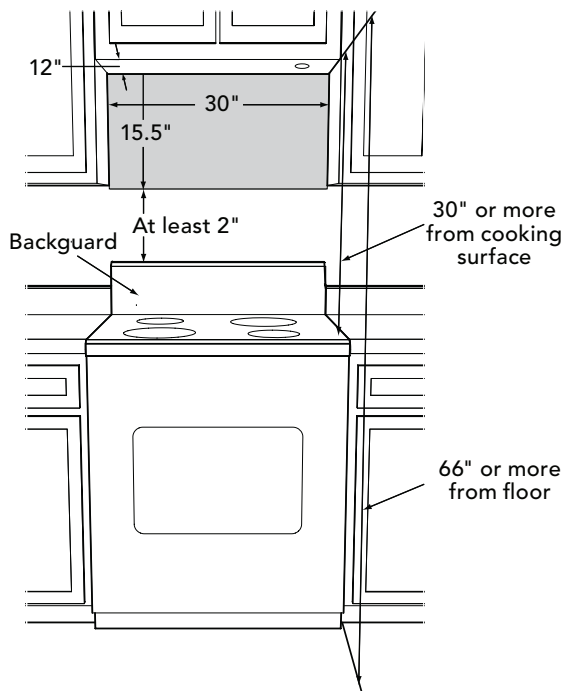

IMPORTANT: * Power cord opening for metal cabinets:
Debur opening to remove rough edges.



VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com
© 2013 Viking Range, LLC | Specifications subject to change without notice.