


Product and Cut-out Dimensions

G2000 Series Dishwashers

Fully Integrated Models

Miele

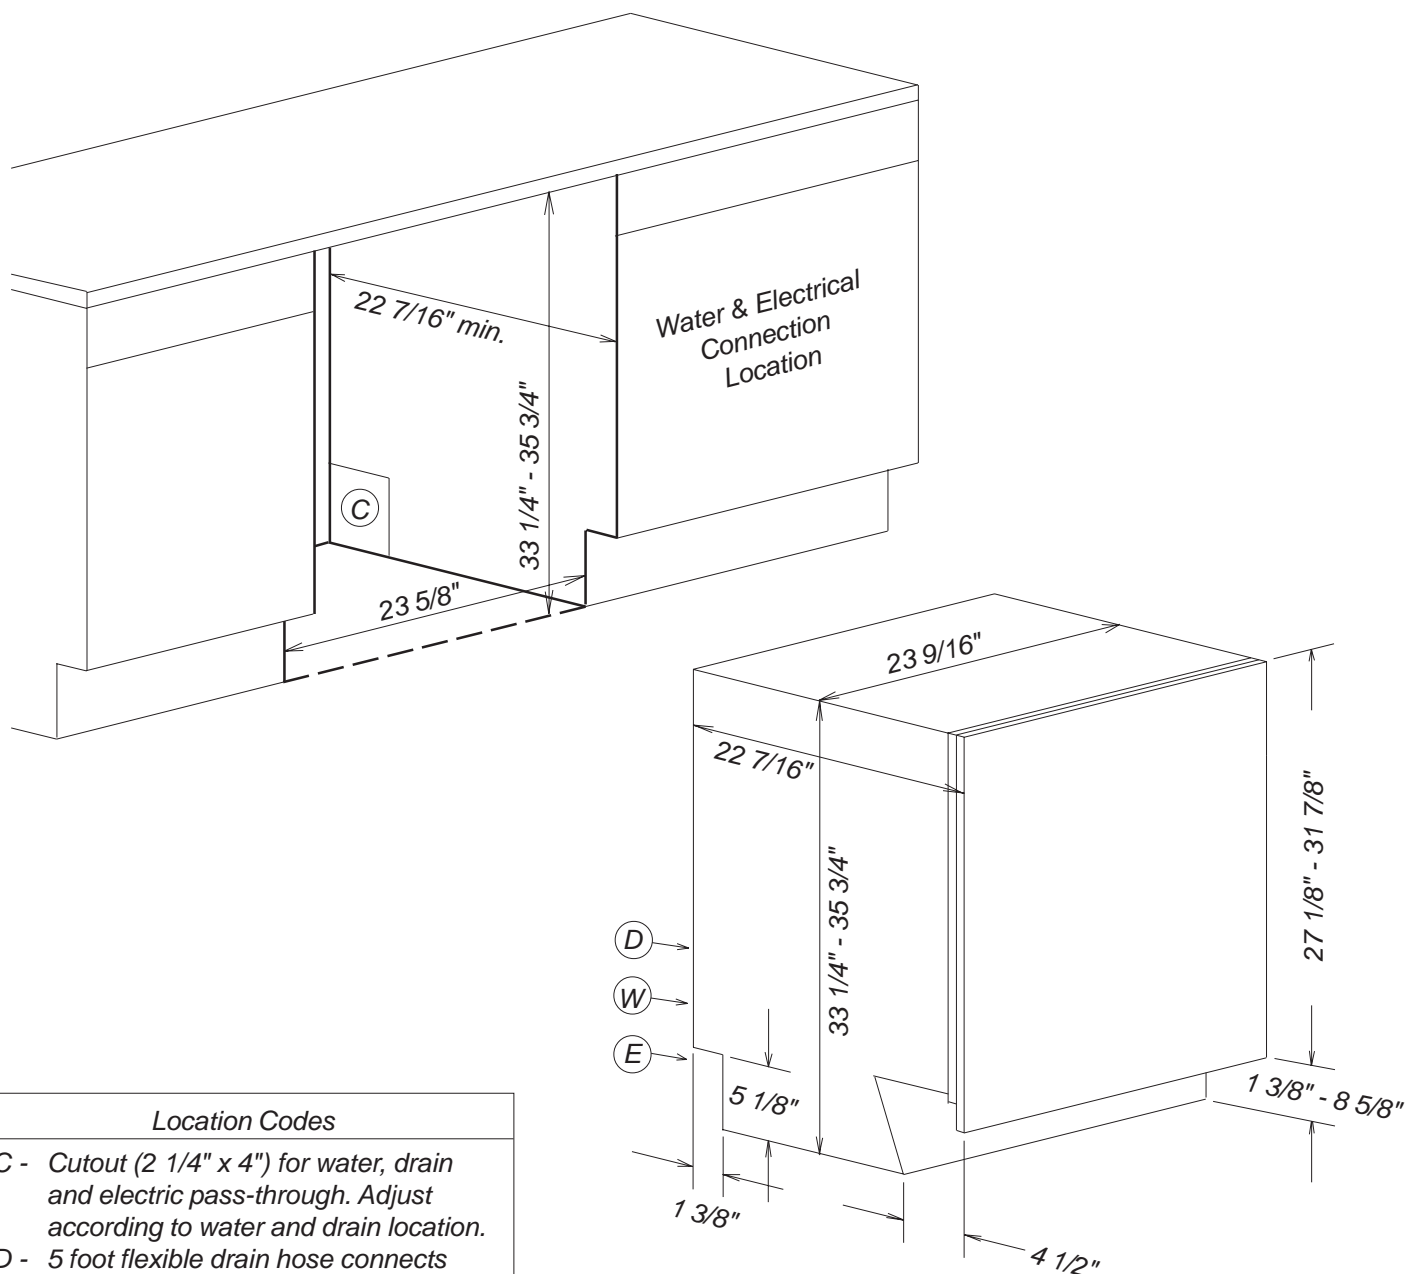

Location Codes


- C** - Cutout ($2 \frac{1}{4}" \times 4"$) for water, drain and electric pass-through. Adjust according to water and drain location.
- D** - 5 foot flexible drain hose connects lower center rear.
- E** - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear.
- W** - 5 foot "Double Waterproof" flexible water intake hose connects lower center rear.

Notes

- All installations must be done in accordance with local codes

NOTE: Drawing is not to scale.
SPECIFICATION SHEETS 010106

Dimensions (Bottom Mount)

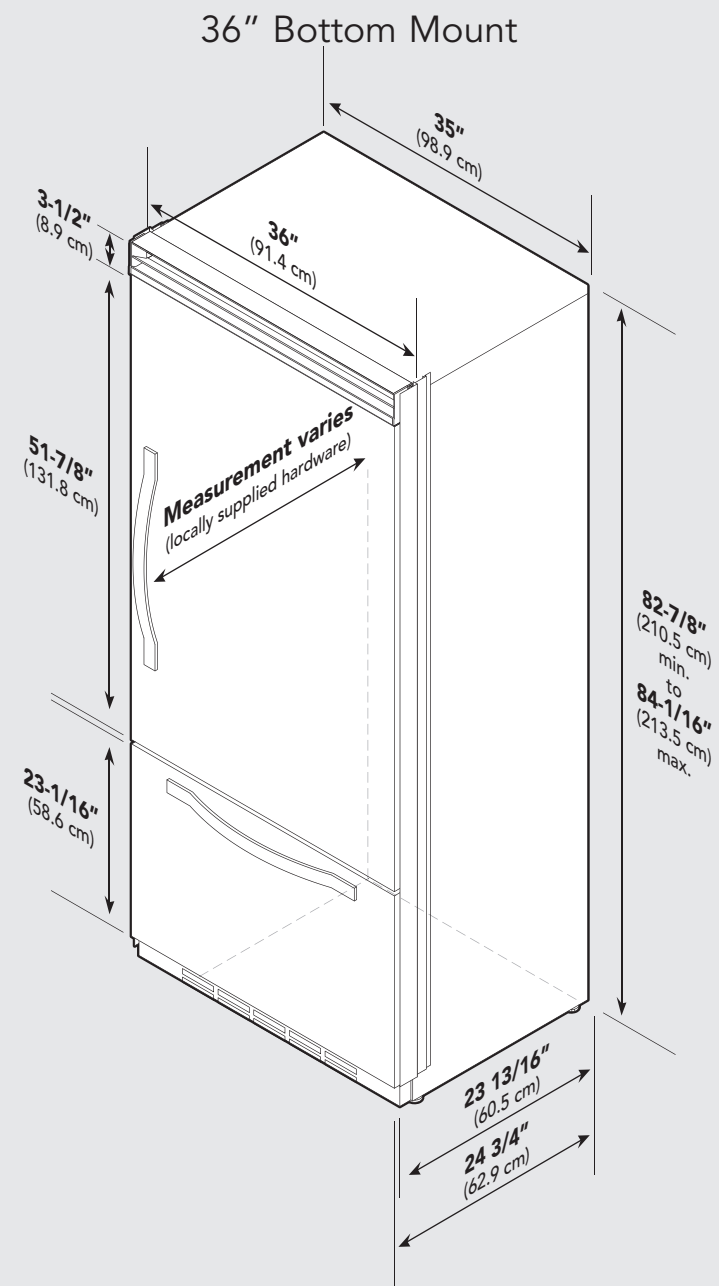


Specifications (Bottom Mount)


36" Bottom Mount		
Description	DFBB363	
Overall width	36" (91.5 cm)	
Overall height (from bottom)	82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max.	
Overall depth (from rear)	To front edge of side trim:	23-13/16" (60.5 cm)
	To front of top grille:	24-3/4" (62.9 cm)
	To front edge of door trim:	24" (61.0 cm)
Cutout width	36" (91.5 cm)	
Cutout height	82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max.	
Cutout depth	24" (61.0 cm) min.*	
Electrical requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with grounded 3-prong plug attached to product	
Maximum amp usage	9.9 amps	
Inlet water requirements	1/4" copper tubing inlet waterline; minimum 20 psi; maximum 120 psi	
Overall interior dimensions	Refrigerator	15.2 cu. ft. (431 liters)
	Freezer	5.1 cu. ft. (145 liters)
	Total capacity	20.3 cu. ft. (576 liters)
Maximum panel weight	Fresh food 45 lbs. (20.4 kg)	Freezer 20 lbs. (9.0 kg)
Approximate shipping weight	500 lbs. (227.3 kg)	

*Full overlay models fit flush in 25" (63.5 cm) deep cabinet openings. They can be installed in standard 24" (61.0 cm) deep openings. The door faces and top grille will protrude 3/4" (1.9 cm) into the room.

Cutout Dimensions (Bottom Mount)

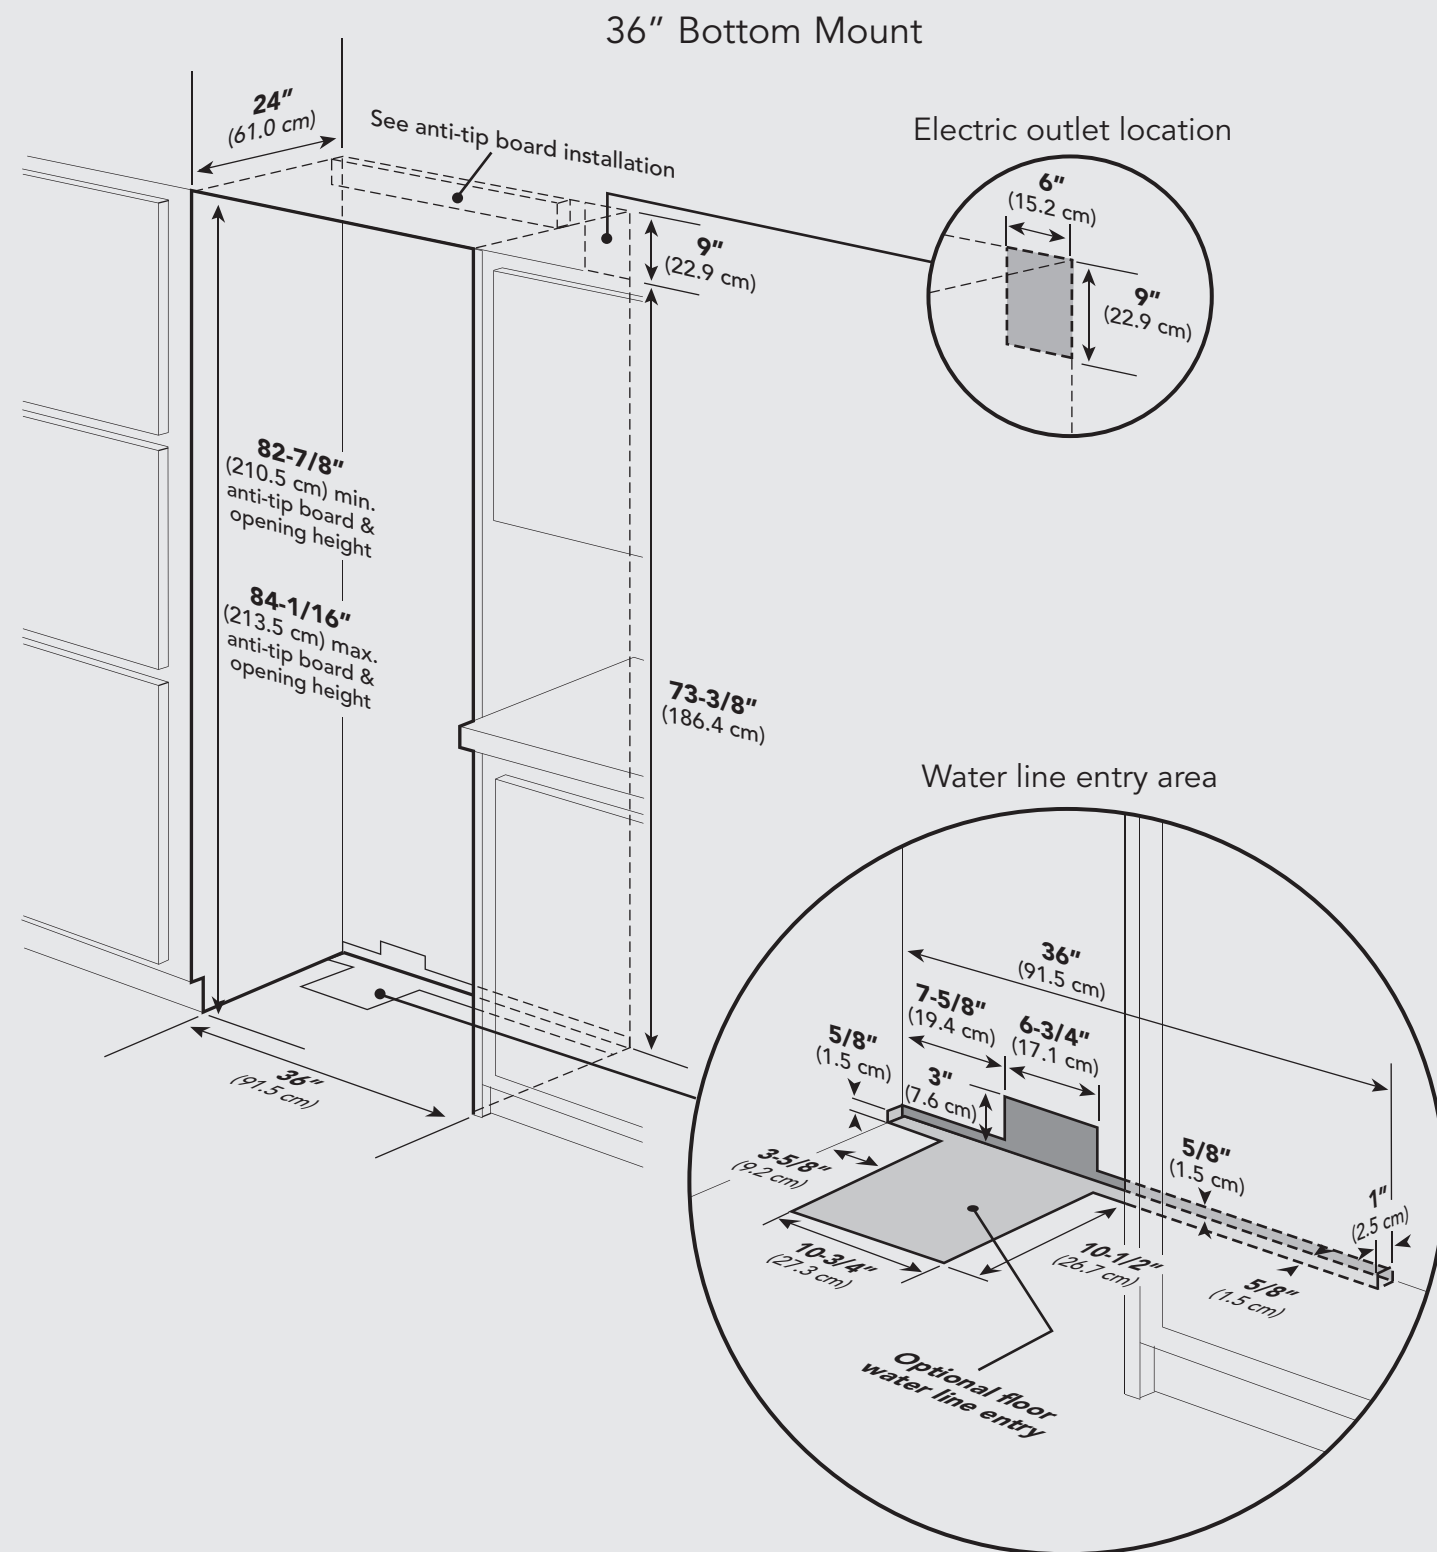


Anti-Tip Dimensions (Bottom Mount)

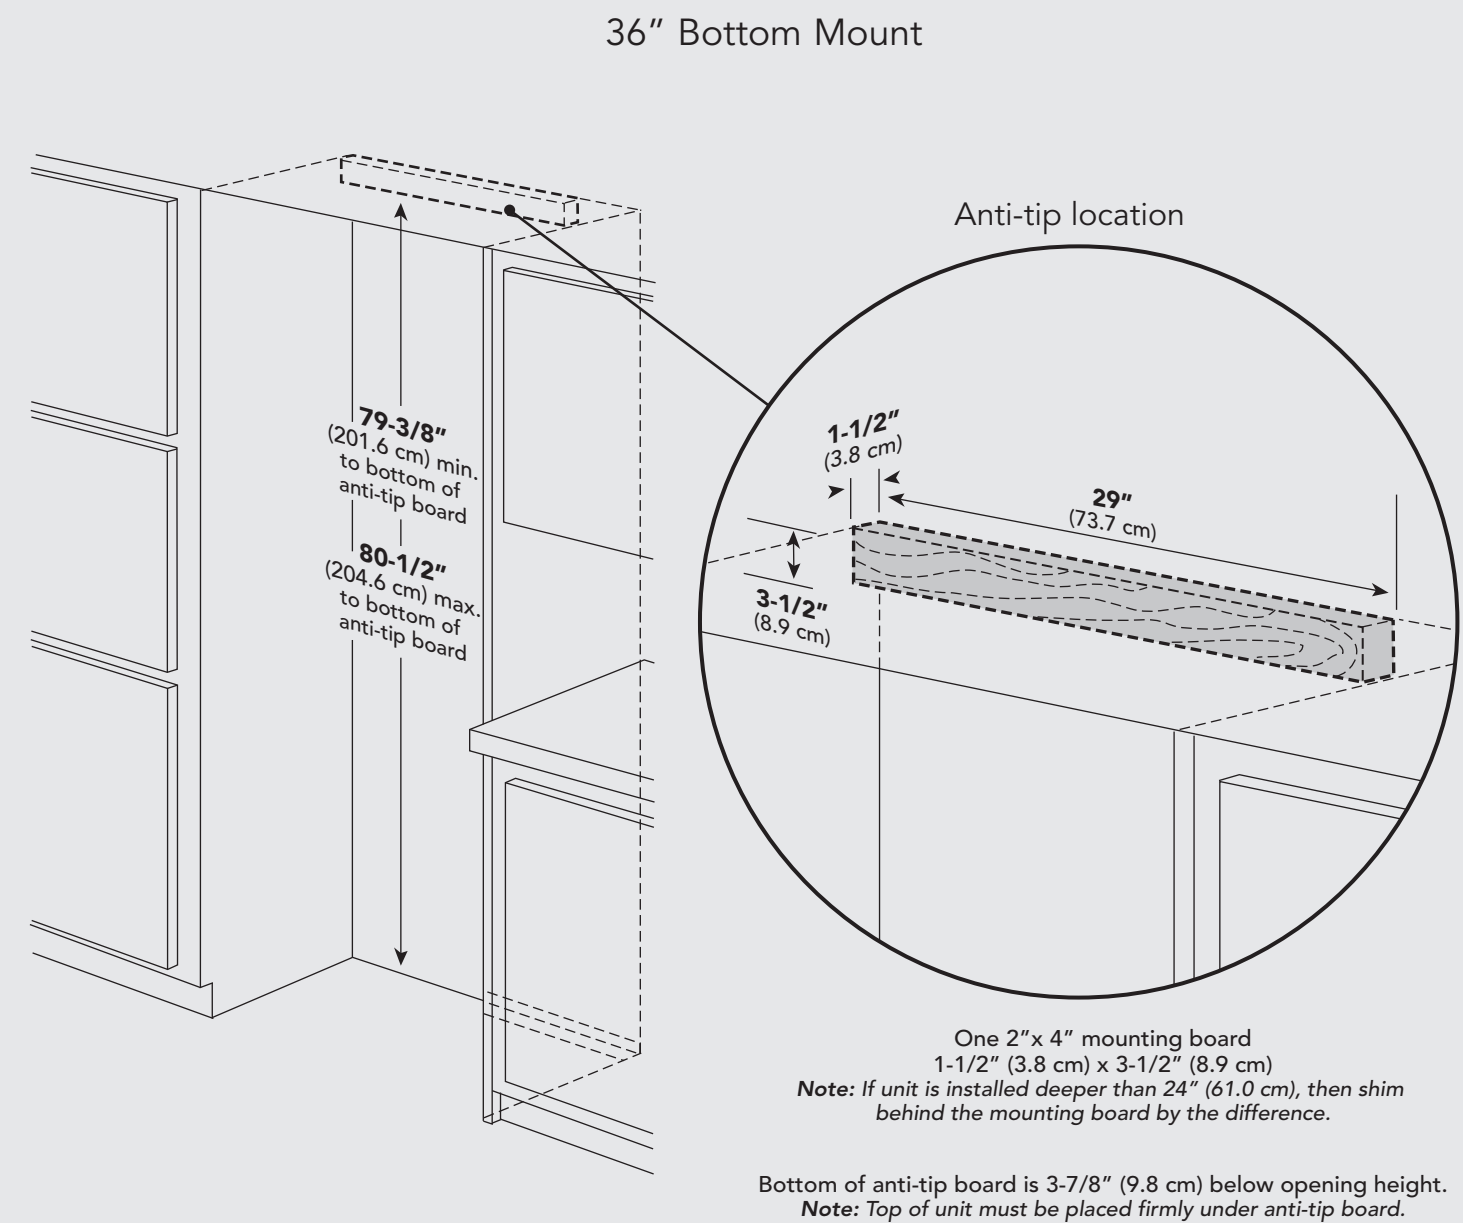


Overlay Dimensions (Bottom Mount)

36" Custom Panels

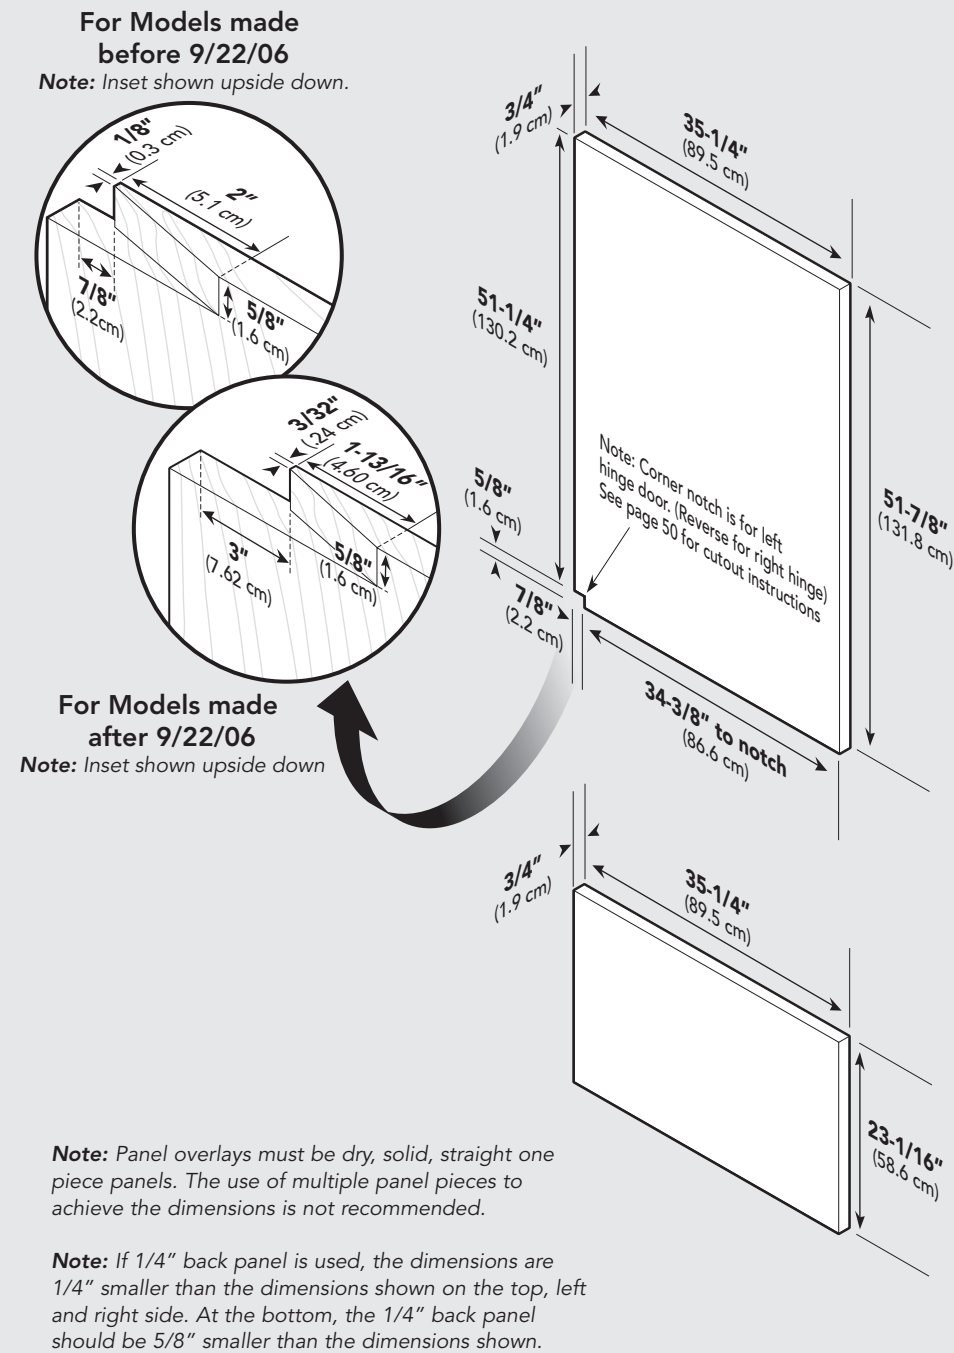

Custom Grille Dimensions (Bottom Mount)

36" Custom Grille

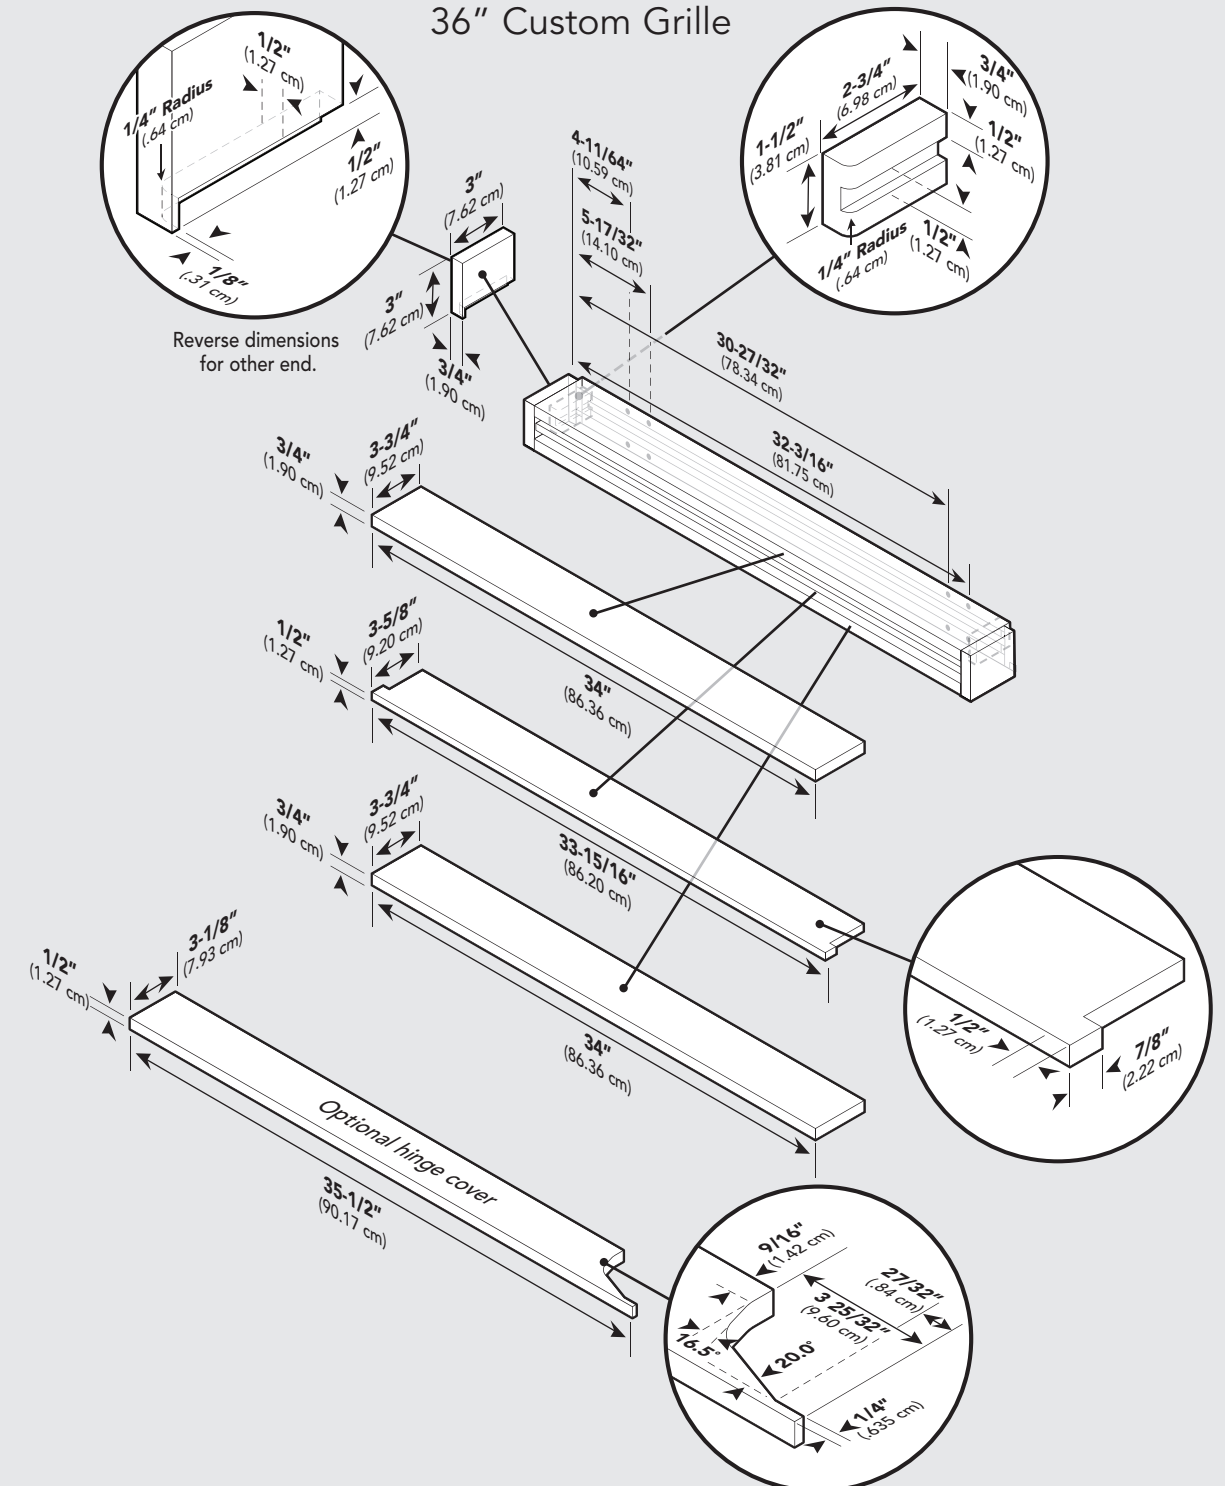


ContourLine 30" Convection Oven H 6780 BP



PRODUCT VIEWS

Isometric View

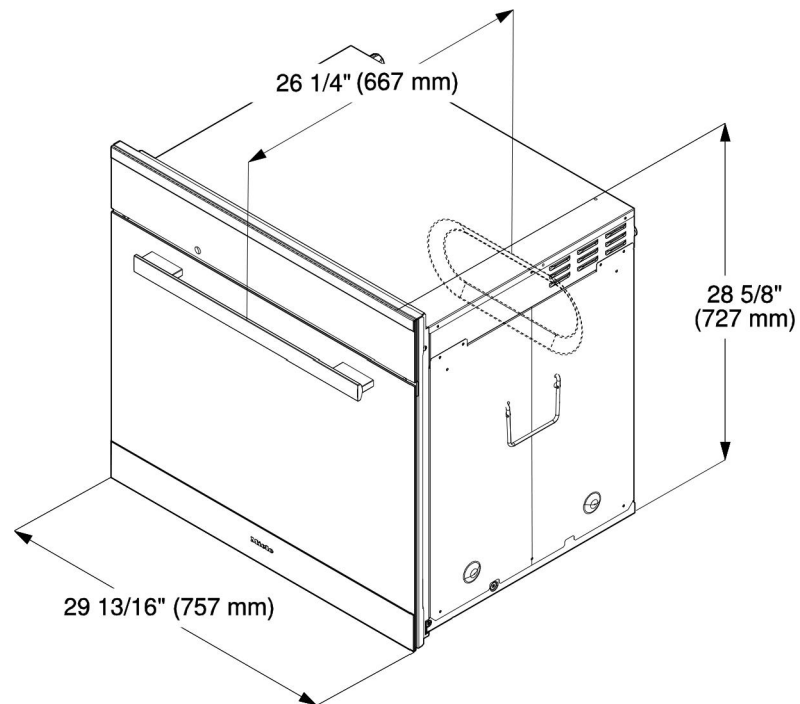

Front View




ContourLine 30" Convection Oven H 6780 BP



INSTALLATION SPECIFICATIONS

Install in Tall Niche

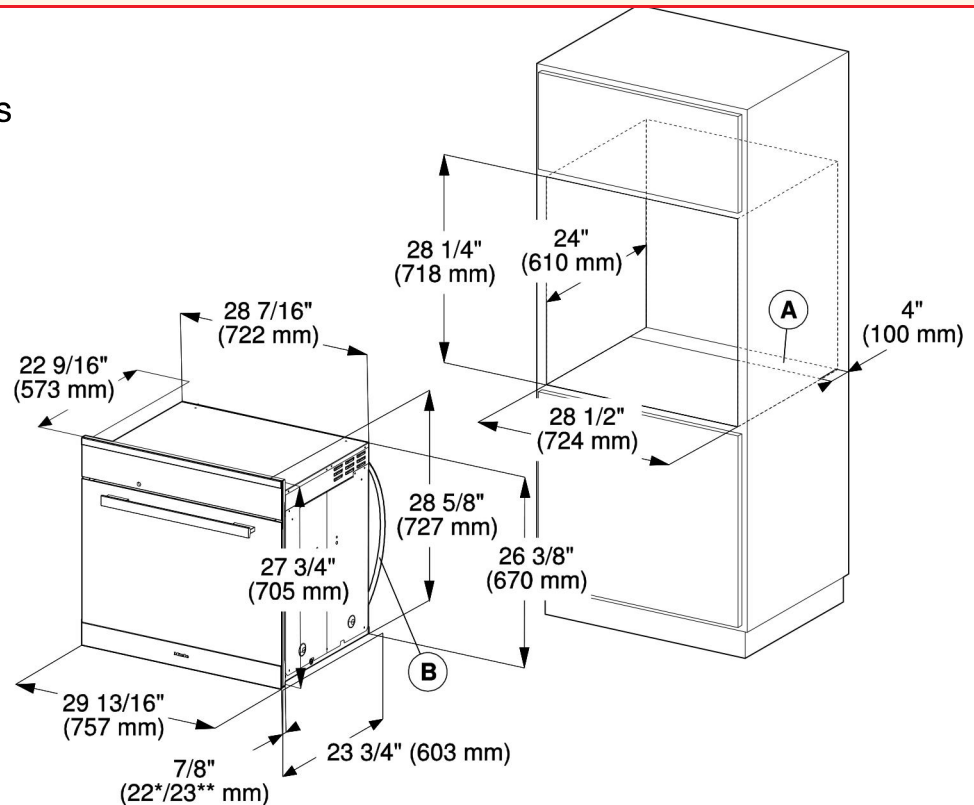


- Ⓐ Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug

* Oven with glass front
** Oven with metal front

INSTALLATION SPECIFICATIONS

Undercounter Installation

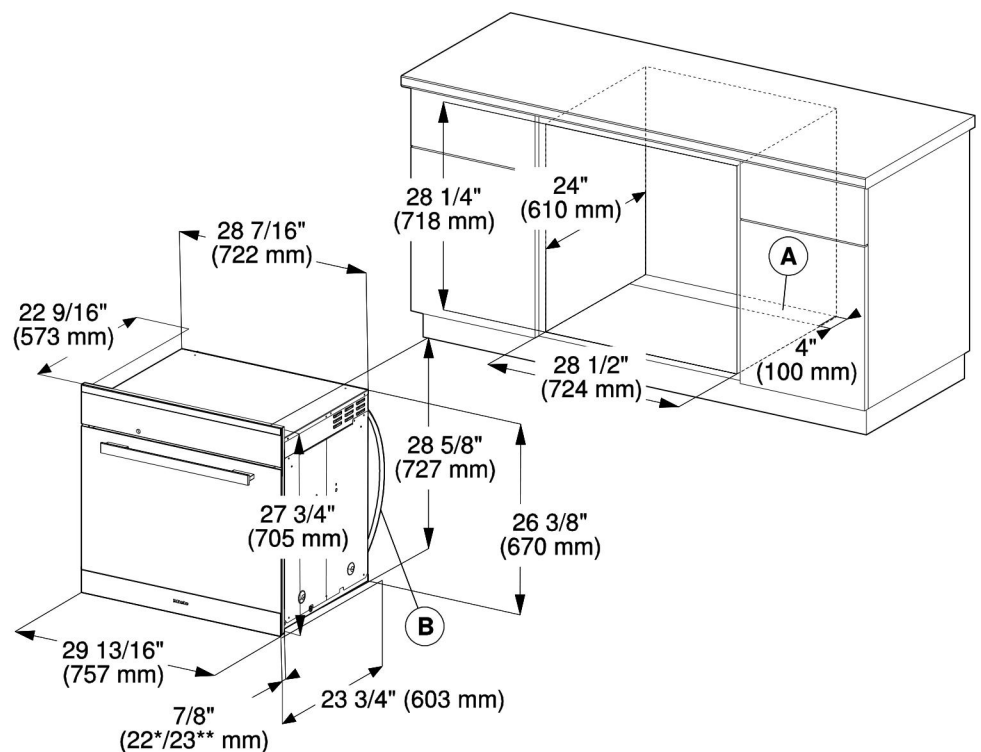


- Ⓐ Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug

* Oven with glass front
** Oven with metal front

36" 5-Burner Gas Cooktop KM 3475 G/LP




INSTALLATION DIMENSIONS

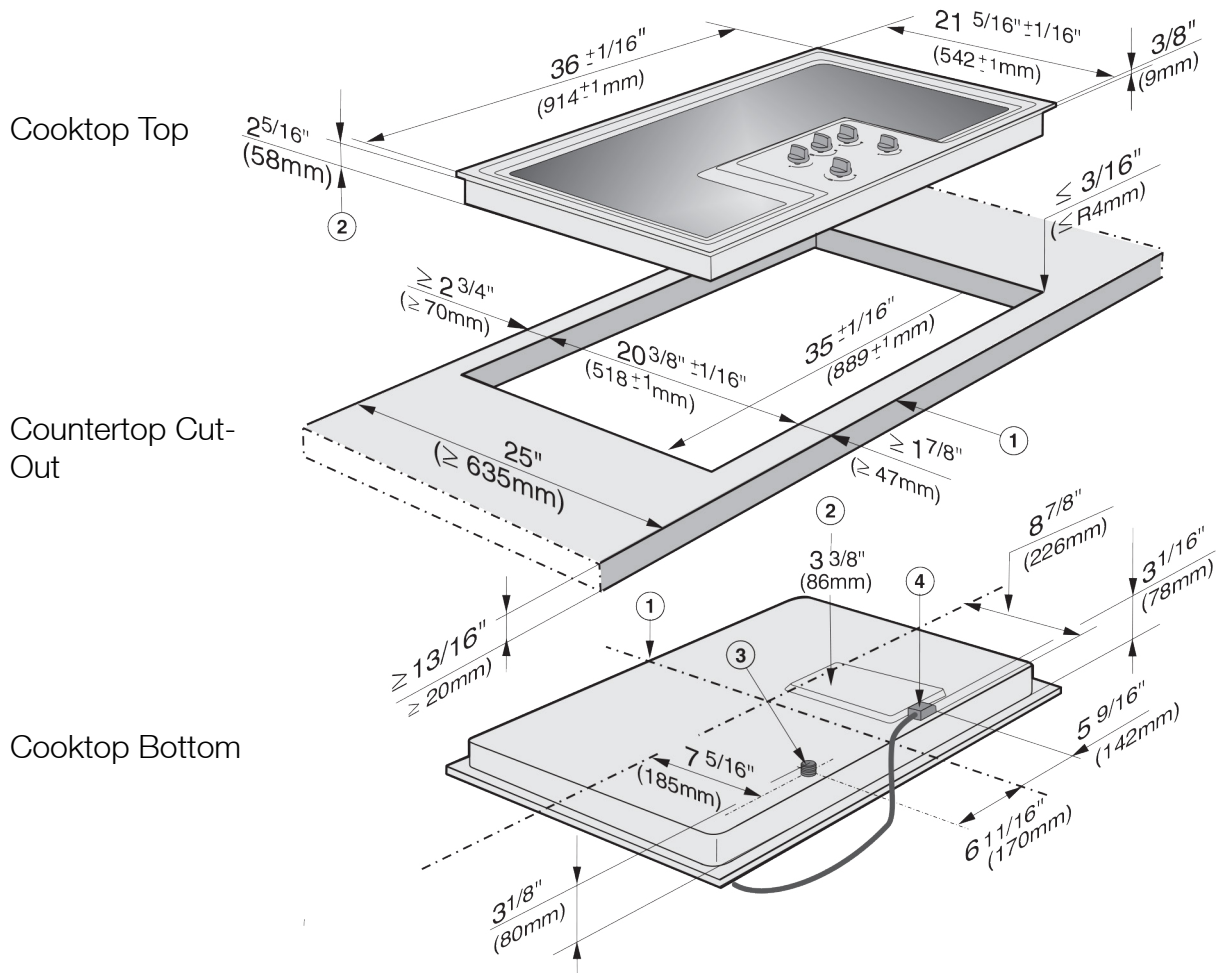

- ① Front
- ② Built-in depth
- ③ Gas connection R $\frac{1}{2}"$ NPT
- ④ Mains connection box

INSTALLATION SPECIFICATIONS

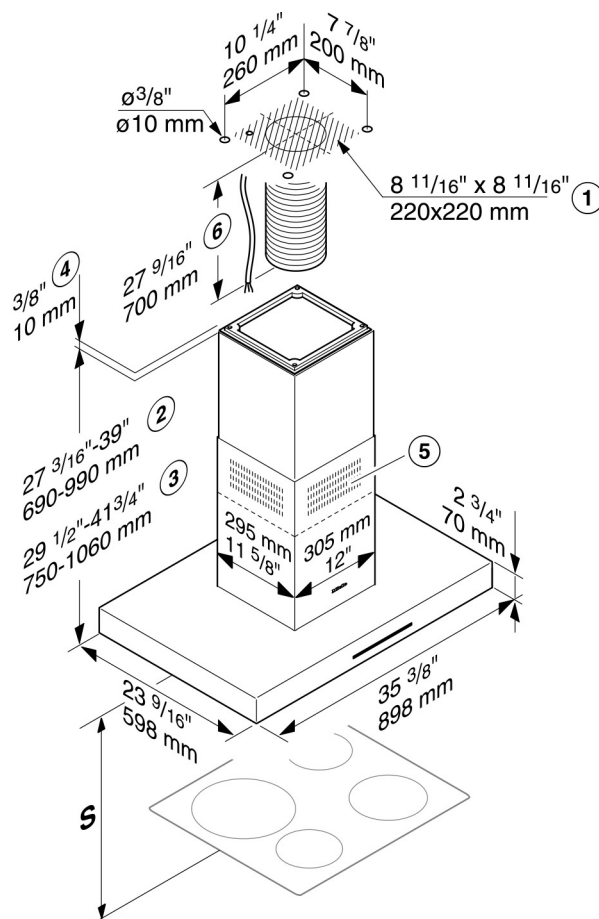

- ① Mounting area for the exhaust ducting and power cable. In recirculation mode, only the power cord is required.
- ② Possible height range for appliance in vented mode
- ③ Possible height range for appliance in recirculation mode
- ④ Alternative installation with spacer frame
- ⑤ Air vent positioned at the top for recirculation
- ⑥ A power cord is required to connect the hood to the socket in the ceiling. With extraction mode flexible ducting is also required.


Exhaust connection Ø 6" (150 mm)

36" Island Ventilation Hood PUR 98 D



INSTALLATION SPECIFICATIONS

Mounting Details

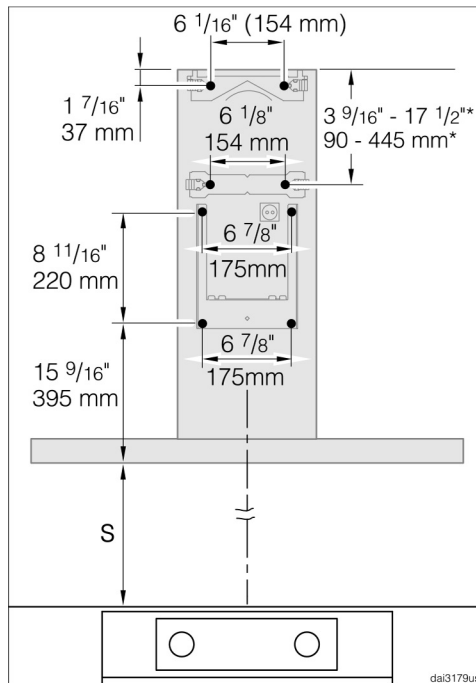

- Center unit over cooking surface
- Distances "S" is determined by the cooking surface. See "Distance between cooktop and hood (S)" dimensions.
- If studs are not available in the required locations, a plywood backing (min. 1/2" (13 mm)) **MUST** be used to reinforce support. Reinforcing material should be affixed to structural wall members. Failure to adequately support the weight as stated may result in the ventilation system falling off the wall, causing personal injury and property damage.

36" Island Ventilation Hood

PUR 98 D



INSTALLATION SPECIFICATIONS

Distance Between Cooktop and Ventilation Hood (S)

Provided a larger distance is not given by the manufacturer of the cooktop, follow the minimum safety distances between a cooktop and the bottom of the hood. Please also observe the information contained in the "IMPORTANT SAFETY INSTRUCTIONS" section.

Cooking appliance	Minimum distance S	
	Miele appliance	Non-Miele appliance
Electric Cooktops	24" (610 mm)	
Electric Barbeques and Fryers	26" (660 mm)	
Multiburner Gas Cooktops ≤ 43,000 BTU/hr (12.6 kW), no burner > 15,000 BTU/hr (4.5 kW).	26" (660 mm)	30" (760 mm)
Multiburner Gas Cooktops ≤ 73,800 BTU/hr (21.6 kW), no burner > 16,500 BTU/hr (4.8 kW)	30" (760 mm)	
Multiburner Gas Cooktops > 73,800 BTU/hr (21.6 kW), or one of the burners > 16,500 BTU/hr (4.8 kW)	Not possible	
Single Burner Gas Cooktops ≤ 20,500 BTU/hr (6 kW)	26" (660 mm)	30" (760 mm)
Single Burner Gas Cooktops > 20,500 BTU/hr (6 kW) ≤ 27,600 BTU/hr (8.1 kW)	30" (760 mm)	
Single Burner Gas Cooktops > 27,600 BTU/hr (8.1 kW)	Not possible	