

Mega-Capacity 3 Door French Door Refrigerator

LFX33975ST



CAPACITY

Refrigerator	22 cu. ft.
Freezer	10.5 cu. ft.
Total	32.5 cu. ft.

FEATURES

Energy Rating	Energy Star® (DOE - 25%)
Ice & Water Dispenser	•
Dispenser Light	White LED
Ice System	Slim SpacePlus™
Daily Ice Production	3.3lbs IcePlus
Ice Storage Capacity	3.0 lbs
Water Filtration System	Compact Filter LT700P
Smart Cooling Plus System	•
Temperature Sensors	11
Linear Compressor	•
Fresh Air Filter	•
Dual Evaporator	•
Display Type	TFT LCD Display/Touch
Temperature Controls	Electronic LED
Door Alarm	•
Child Lock	•
LoDecibel™ Quiet Operation	•
SmartDiagnosis™	•
Auto Closing Door Hinge	•

REFRIGERATOR

No. of Shelves	4 Split/3 Fixed
Folding Shelf	1
Cantilevered Shelves	•
Shelf Construction	Spill Protector™ Tempered Glass
Crisper Bins	2 Humidity Crispers/1 Bonus Drawer
Glide N' Serve™ Drawer	•
Refrigerator Light	Premium LED
EasyReach™ Bins	•

REFRIGERATOR DOOR

No. of Shelves/Bins	R: 3 (2 Adj. Gallon) + 1 ea(Half Door Bin), L: 3 (Small)
Door Bin Construction	3 Piece (Clear+Opaque+Spray Deco)
Dairy Corner	•

FREEZER

Door Type	Pull Drawer
Drawers	3
DuraBase™ Solid Drawer Base	•
Drawer Divider	•
Ice Bin	•
Freezer Light	Premium LED
Handle	Smart Pull™ Handle
3-Tier Organization	•

MATERIALS AND FINISHES

Contour Door	•
Hidden Hinges	•
Surface	Coated Metal, Stainless Steel
Back	Flush & Metal Cover Over Mechanical Parts
Available Colors	Stainless Steel (ST)
Handles	Matching Commercial Handles

DIMENSIONS/CLEARANCES/WEIGHT

Depth with Handles	37 1/8"
Depth without Handles	34 5/8"
Depth without Door	30 3/8"
Depth (Total with Door Open)	49"
Height to Top of Case	68 7/8"
Height to Top of Door Hinge	70 1/4"
Width	35 3/4"
Width (Door Open 90° with Handle)	45"
Width (Door Open 90° without Handle)	40"
Door Edge Clearance with Handle	4 5/8"
Door Edge Clearance without Handle	2 1/4"
Installation Clearance	Sides 1/8", Top 1", Back 1"
Weight (Unit/Cartron)	340 lbs./380 lbs.
Carton Dimensions (WxHxD)	38" x 73" x 39"

LIMITED WARRANTY

1 Year Parts and Labor,
7 Years on the Sealed System,
10 Years on Linear Compressor

UPC CODES

LFX33975ST Stainless Steel	048231 784603
----------------------------	---------------



LG Electronics U.S.A., Inc.

1000 Sylvan Avenue Englewood Cliffs, NJ 07632
Customer Service and Technical Support: (800) 243-0000

LG.com


Design, features and specifications are subject to change without notice.
Non-metric weights and measurements are approximate.

© 2012 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective companies. 10/4/12

Model: HR 1134 G / HR 1134 LP



Isometric




36" All Gas Range

Model: HR 1134 G / HR 1134 LP



PRODUCT VIEWS

Detailed Side View

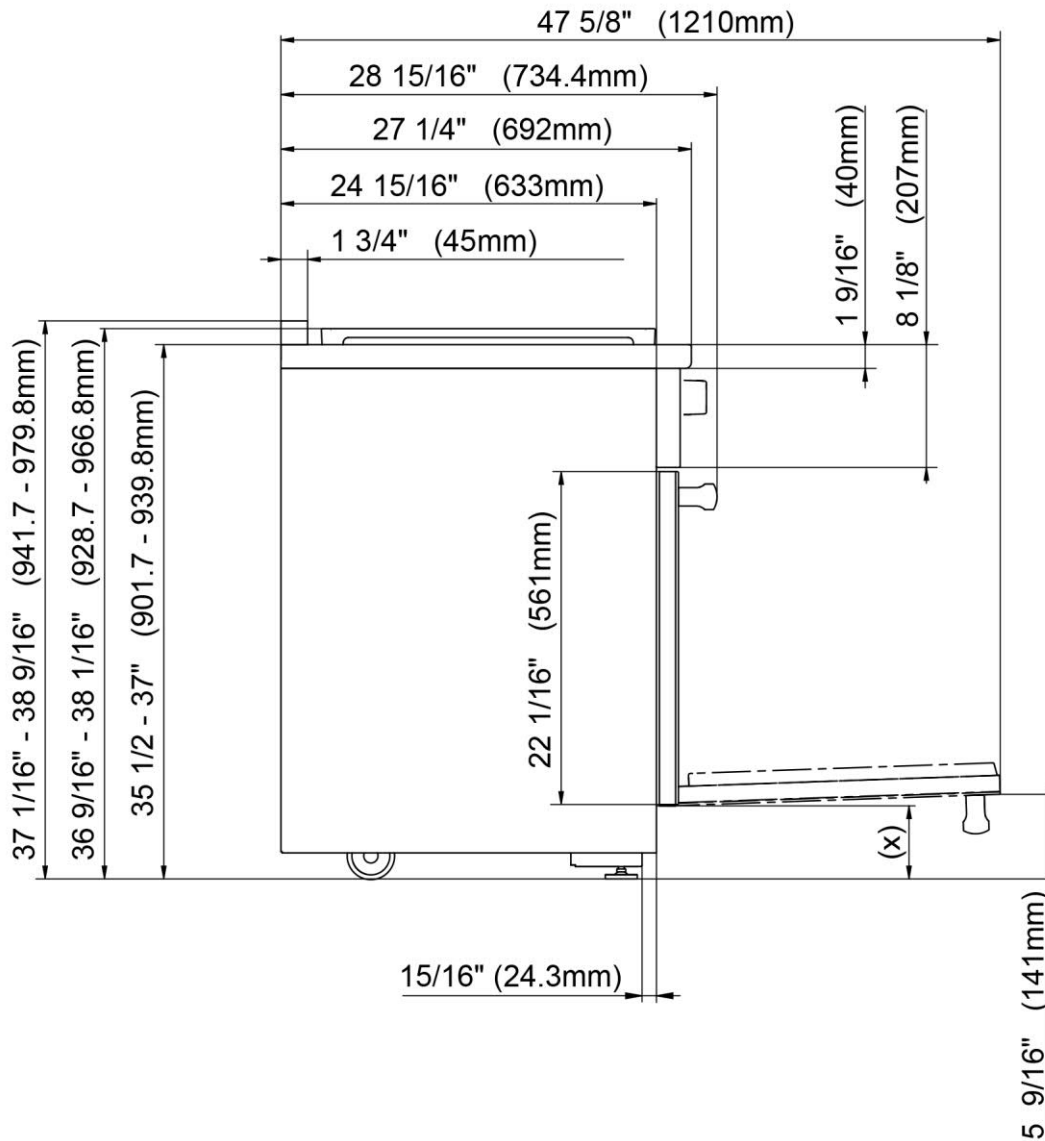

(x) = Toe-kick height adjustment 5" - 6 1/2" (127 mm - 165.1 mm)

36" All Gas Range
Model: HR 1134 G / HR 1134 LP




M Pro Power Plus
Configuration

Standard Configuration with Pro
Hood*



M Pro Power Plus SPECIFICATIONS	
Burners (G/LP)	
Gas Burners:	(1) 12,500 BTU (G/LP); (5) 19,500 BTU (G/LP)
Total BTU Output	110,000 BTU (G/LP)

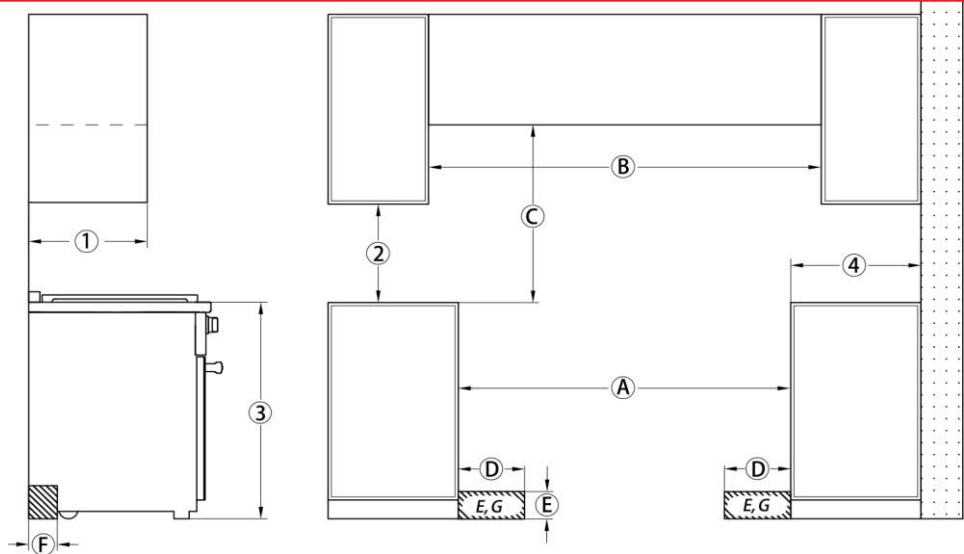

Ⓑ In case of combustible materials, a minimum distance of 6" must be observed on each side in addition to dimension Ⓐ.

Ⓓ, Ⓔ, Ⓕ The shaded area represents the installation area for the connections:
E = Electrical connection, G = Gas connection

Position	Dimensions	Description	
①	13" (330 mm)	Maximum depth of top cabinet	
②	18" (457 mm)	Minimum distance to bottom edge of top cabinet	
③	35 1/2"–37" (901–940 mm)	Distance from the floor to cooktop surface	
④	10" (254 mm)	Minimum distance to combustible surfaces.	
Ⓐ	Min. 36" (914 mm)	Width of cabinet opening	
Ⓑ	6" + Ⓐ + 6" (150 mm + Ⓐ + 150 mm)	If combustible materials are present, an additional minimum distance of 6" (150 mm) (each side) is required. Ensure that the local codes are observed.	
Ⓒ	37" (940 mm)	Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface.	
	36" (914 mm)	Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XL blower).	
	30" (762 mm)	Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XXL blower).	
	For all other Hoods please consult the manufacturer's specifications for required distances.		
Ⓓ	Approx. 13 3/4" (350 mm)	Maximum connection width right and left	Position of the wall socket
Ⓔ	Approx. 4 1/2" (115 mm)	Maximum connection height	
Ⓕ	Approx. 2 13/16" (72 mm)	Maximum connection depth	

* Please note if a BTU-reducing kit is necessary, an authorized installer is required to modify the product to meet ANSI Z21.

HR 1134
Page 8 of 10
Specification Sheet TRS 05022016


PH36GS

27-INCH DEPTH WALL HOOD (36-INCH WIDTH)

PROFESSIONAL SERIES



HOOD DIMENSIONS

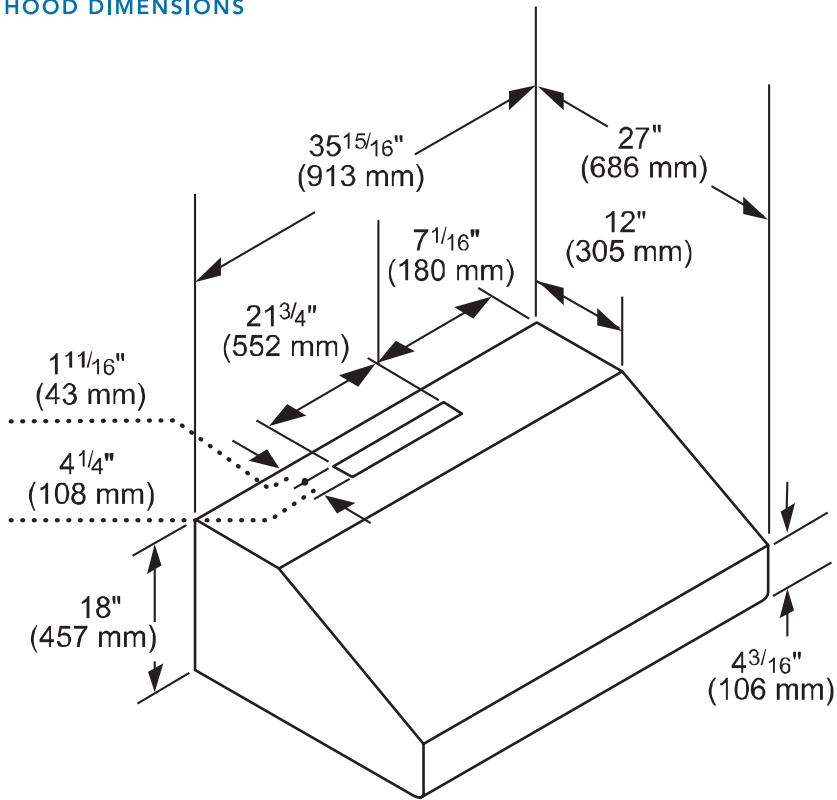

measurements in inches and mm


OPTIONAL ACCESSORIES

36" WIDE DUCT COVER

DC36US 6" HIGH

DCT36US 12" HIGH


Stainless steel duct cover for wall hood applications

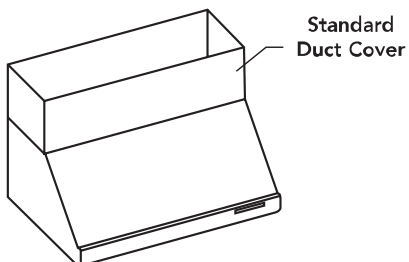

Classic Plus **G4971SCVi**
Fully Integrated Dishwasher 6" ToeKick



INSTALLATION SPECIFICATIONS

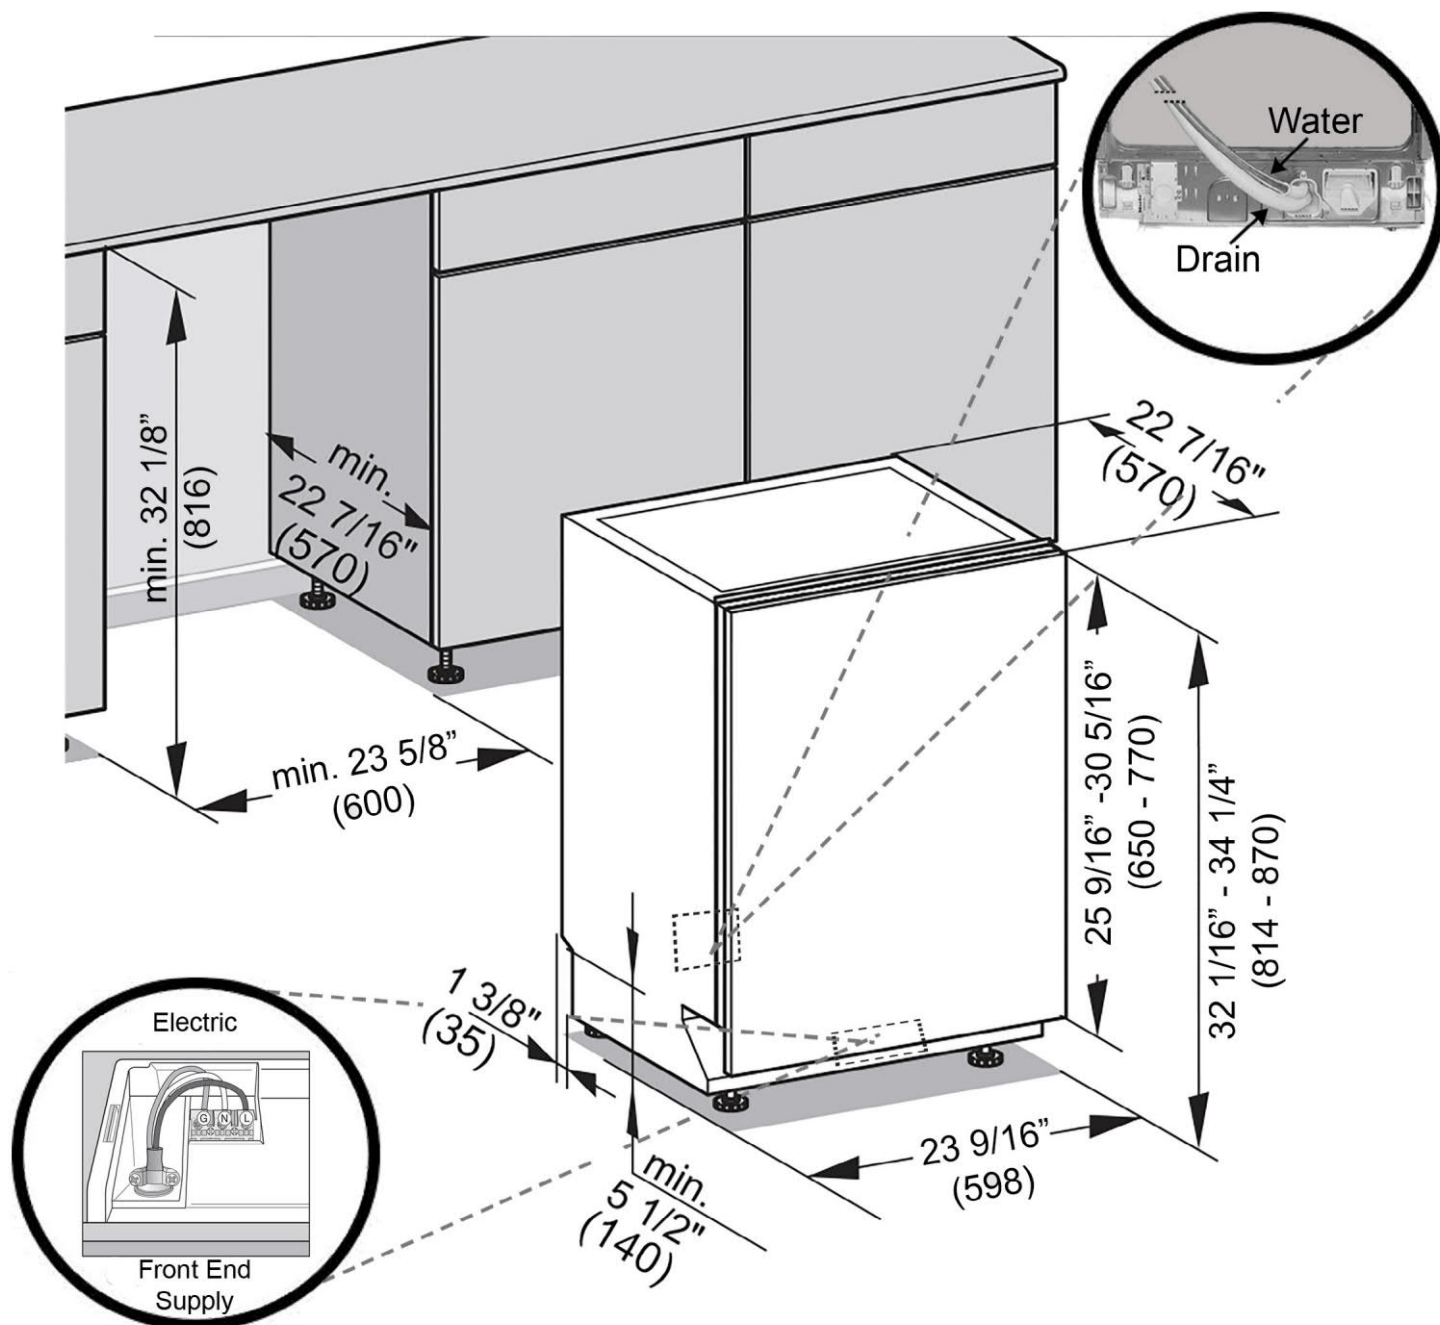

- Drain -** 4 ft 11 in (1.5 m) flexible drain hose.
(Connects from lower center rear)
- Water -** 4 ft 11 in (1.5 m) flexible water intake hose with 3/8" compression fitting.
(Connects from lower center rear)
- Electric -** 4 ft 11 in (1.5 m) 120V 15 A 3 wire molded NEMA 5-15 plug power supply. (Connects via Front End Supply or may be hardwired)