
UNDER-COUNTER DOUBLE DRAWER REFRIGERATOR

CUSTOM PANEL-READY




DOUBLE DRAWER REFRIGERATOR PRODUCT DIMENSIONS

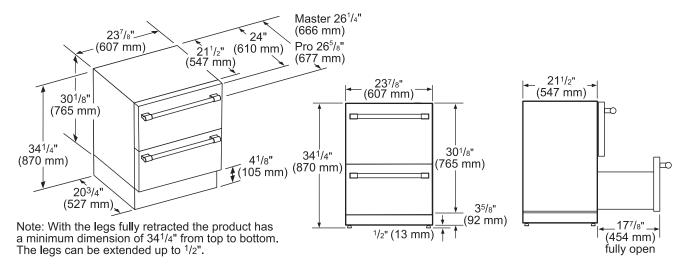

measurements in inches (mm)


DOUBLE DRAWER REFRIGERATOR CUTOUT DIMENSIONS



Thermador double drawer under counter top dimension. (Unit door flushed with the cutout)


DOUBLE DRAWER REFRIGERATOR


CLEARANCE DIMENSIONS



measurements in inches (mm)

DOUBLE DRAWER REFRIGERATOR SIDE-BY-SIDE INSTALLATION



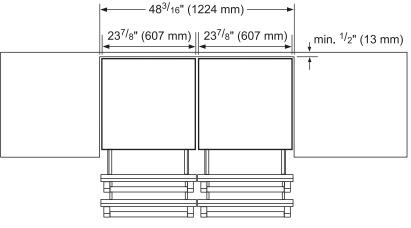


asurements in inches (mm)

Page 2 of 4 2 / 19

T24UR900DP UNDER-COUNTER DOUBLE DRAWER REFRIGERATOR **CUSTOM PANEL-READY**



DOUBLE DRAWER REFRIGERATOR CUTOUT DIMENSIONS & ELECTRICAL LOCATION



Recommended area for installation connection - a 2¹/2" (63 mm) diameter hole is recommended. Location of power cord at base of the appliance.

5¹/₈" Α Α (130 mm) (102 mm) †


It is recommended that the water

connection is placed adjacent to the installation cavity, so that it can be accessed without uninstalling the appliance.

For flush installation, recommend outlet and water connection to be placed to the side of the unit and not directly behind.

measurements in inches (mm)

DOUBLE DRAWER REFRIGERATOR CUSTOM PANEL DIMENSIONS

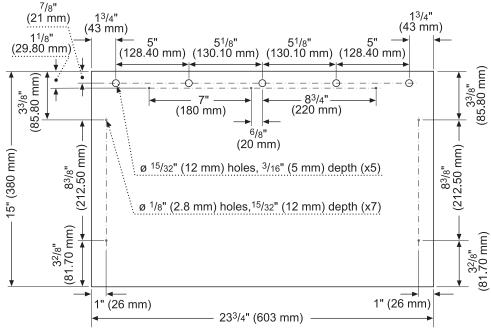

Notes:

- The Ø $^{15}/_{32}$ " (12 mm) holes are only needed in the top panel. Bottom panel does not need these holes.
- The thickness of the overlay panel must be 3/4" (19 mm).

 Overlay panel must not weigh more than 4.54 kg (10 lb).

 Overlay panel weighing more than recommended may cause damage to the appliance. It is recommended to have the help of a second person to install the panel.
- Use the recommended tools in the installation manual to facilitate the installation of the panel. Failure to use the recommended tools or the help of a second person may result in damage to the panel and/or the appliance.

measurements in inches (mm)

Page 3 of 4 2 / 19

T24UR900DP UNDER-COUNTER DOUBLE DRAWER REFRIGERATOR CUSTOM PANEL-READY



ACCESSORIES (OPTIONAL)

HANDLES

NOTE: Choose one handle for each glass door model, choose 2 handles for each double drawer model.



PR20HNDL20 20-Inch Professional Series Handle



MS20HNDL20 20-Inch Masterpiece® Series Handle

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

 $1\,800\,735\,4328 \mid USA\,THERMADOR.COM\mid CANADA\,THERMADOR.CA\mid @2019\,BSH\,HOME\,APPLIANCES\,CORPORATION.\,ALL\,RIGHTS\,RESERVED.\,AUCTOR (CORPORATION)$

Page 4 of 4 2 / 19




36" FULI.Y INTEGRATED FRENCH DOOR REFRIGERATOR

DETAILED PLANNING DIMENSIONS GUIDE


(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF36NXFXDE - 35³/₄" (W) x 82⁷/₈" (H) x 24" (depth without door panels/handles)

PRODUCT DIMENSIONS

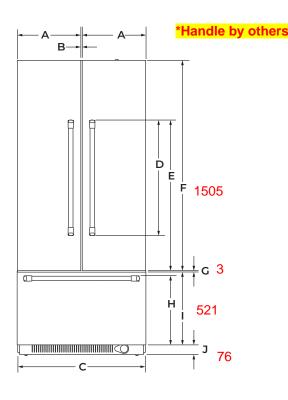

FRONT VIEW



DIMENSION	DESCRIPTION	JF36NXFXDE
Α	Width of each door	17 ¹³ / ₁₆ " (45.2 cm)
В	Space between doors	1/8" (0.3 cm)
С	Overall width (including vinyl side trims)	35 ³ / ₄ " (90.8 cm)
	Height of door handle	
D	RISE™ Stainless	40%" (103.8 cm)
	NOIR™ Stainless	405/8" (103.2 cm)
	Height to top of door handle	497/s"
Е	RISE™ Stainless	(126.6 cm)
	NOIR™ Stainless	47 ¹⁵ ⁄ ₁₆ " (121.8 cm)
F	Height of door	59½" (150.5 cm)
G	Space between door and drawer	1/8" (0.3 cm)
	Height to top of drawer handle	
н		195/16" (49.1 cm)
н	handle	195½" (49.1 cm)
H	handle RISE™ Stainless	
	handle RISE™ Stainless NOIR™ Stainless	193/8" (49.2 cm)
1	handle RISE™ Stainless NOIR™ Stainless Height of drawer	193/8" (49.2 cm) 201/2" (52.1 cm)
I J	handle RISE™ Stainless NOIR™ Stainless Height of drawer Height of bottom grille Width from side of refrigerator to handle – door	193/8" (49.2 cm) 201/2" (52.1 cm)
I J	handle RISE™ Stainless NOIR™ Stainless Height of drawer Height of bottom grille Width from side of refrigerator to handle – door fully open 110°	193/8" (49.2 cm) 201/2" (52.1 cm) 3" (7.6 cm)
I J K	handle RISE™ Stainless NOIR™ Stainless Height of drawer Height of bottom grille Width from side of refrigerator to handle – door fully open 110° RISE™ Stainless	19¾" (49.2 cm) 20½" (52.1 cm) 3" (7.6 cm) 7½" (18.4 cm)
I J	handle RISE™ Stainless NOIR™ Stainless Height of drawer Height of bottom grille Width from side of refrigerator to handle – door fully open 110° RISE™ Stainless NOIR™ Stainless Width from side of refrigerator to handle – door	19¾" (49.2 cm) 20½" (52.1 cm) 3" (7.6 cm) 7½" (18.4 cm)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




SOUP FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

JENNAIR® DETAILED PLANNING DIMENSIONS GUIDE

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF36NXFXDE – 353/4" (W) x 827/8" (H) x 24" (depth without door panels/handles)

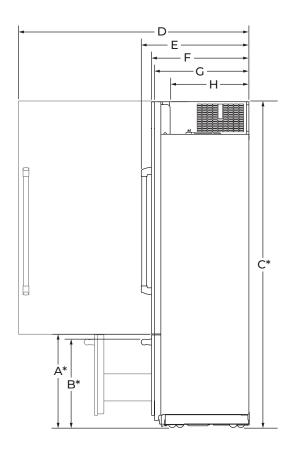

SIDE VIEW

DIMENSION	DESCRIPTION	JF36NXFXDE
A *	Height to top of drawer (min.)	23½" (59.7 cm)
	Height to top of drawer handle (min.)	
B*	RISE™ Stainless	225/16" (56.7 cm)
	NOIR™ Stainless	223/8" (56.8 cm)
C*	Height to top of door (min.)	82%" (210.5 cm)
D	Depth with door open 90° (min.)	41" (104.1 cm)
	Depth with handle (min.)	27 ¹¹ /16"
E	RISE™ Stainless	(70.2 cm)
	NOIR™ Stainless	26%" (68.2 cm)
	Depth with door (min.)	
F	RISE™ Stainless	24¾" (62.9 cm)
	NOIR™ Stainless	24 ³ / ₄ " (62.9 cm)
	Custom panel (3/4"/1.9 cm)	24 ³ / ₄ " (62.9 cm)
G	Depth without door panel kit (min.)	24" (61 cm)
Н	Depth of compressor cover (min.)	197⁄8" (50.5 cm)

*Add 1½" (3.2 cm) to the height dimension when leveling legs are fully extended.



36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

JENNAIR® DETAILED PLANNING DIMENSIONS GUIDE

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)


JF36NXFXDE – 35³/₄" (W) x 82⁷/₈" (H) x 24" (depth without door panels/handles)

AIRFLOW VENTING RECOMMENDATIONS

ARMOIRE-STYLE/FULL HEIGHT DOOR PANEL KIT INSTALLATION

IMPORTANT:

- Armoire-style/Full height door panel kit installations recommend a minimum of 1/8" (3.2 mm) of open space above the refrigerator. It is recommended that this space not be blocked in any way, including soffits.
- Models may be installed using either Option 1, Option 2 or Option 3.

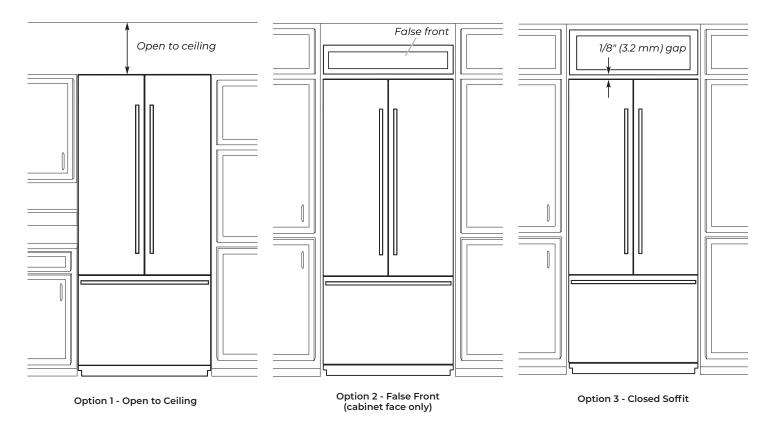




36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR


JENNAIR® DETAILED PLANNING DIMENSIONS GUIDE

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF36NXFXDE – 35³/₄" (W) x 82⁷/₈" (H) x 24" (depth without door panels/handles)

OPENING/CLEARANCE DIMENSIONS

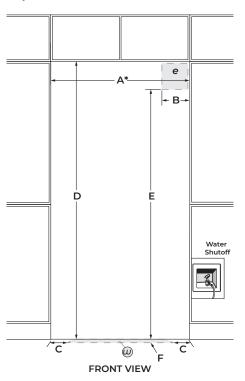



DIMENSION	DESCRIPTION	JF36NXFXDE
A *	Width (min.)	36" (91.4 cm)
В	Width of recommended electrical location	4" (10.2 cm)
С	Distance from side of cabinet to recommended water connection location	6" (15.2 cm)
D	Height (min.)	84" (213.4 cm)
E	Height to recommended electrical location	77" (195.6 cm)
F	Depth of recommended water connection location (max.)	1" (2.5 cm)
е	Recommended electrical connection location	
ω	Recommended water conn	ection location

^{*}A minimum 2" (5.1 cm) furniture return must extend behind the face of the cabinet on all sides.


Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

SITE PREPARATION PANEL DIMENSIONS

BOTTOM MOUNT MODEL


- !
- Maximum allowable weights:
- Door panel 60 lbs (27.2 kg)
- Drawer panel 25 lbs (11.3 kg)



Legend	Model	Dimension
Α	36"	35 ³ / ₄ " (90.81 cm)
В	36"	59 ¹ / ₈ " (150.2 cm)
С	36"	20 ¹ / ₂ " (52.07 cm)

FRENCH DOOR BOTTOM MOUNT MODELS


- Maximum allowable weights:
- Door panel 38 lbs (17.2 kg)
- Drawer panel (36" model) 25 lbs (11.3 kg)
- Drawer panel (42" model) 30 lbs (13.6 kg)



Legend	Model	Dimension
Α	36"	17 ³ / ₄ " (45.24 cm)
В		59 ¹ / ₈ "(150.2 cm)
С		20 ¹ / ₂ " (52.07 cm)
D		35 ³ / ₄ " (90.81 cm)
Α	42"	20 ³ / ₄ " (52.86 cm)
В		59 ¹ / ₈ " (150.2 cm)
С		20 ¹ / ₂ " (52.07 cm)
D		41 ³ / ₄ " (106.05 cm)

SIDE BY SIDE MODELS

- !
 - Maximum allowable weights (42" models):
 - Refrigerator Door panel 65 lbs (29.5 kg)
 - Freezer Door panel 49 lbs (22.2 kg)
 Maximum allowable weights (48" models):
 - Refrigerator Door panel 66 lbs (29.9 kg)
 - Freezer Door panel 50 lbs (23 kg)




Legend	Model	Dimension
Α		17 ³ / ₄ "(45.24 cm)
В	42"	23 ³ / ₄ " (60.48 cm)
С		81" (205.7 cm)
Α		20 ¹ / ₄ " (51.59 cm)
В	48"	27 ¹ / ₄ " (69.37 cm)
С		81" (205.7 cm)


30" Single Wall Oven

Benchmark™ Series - Stainless Steel HBLP451UC



Installation Details

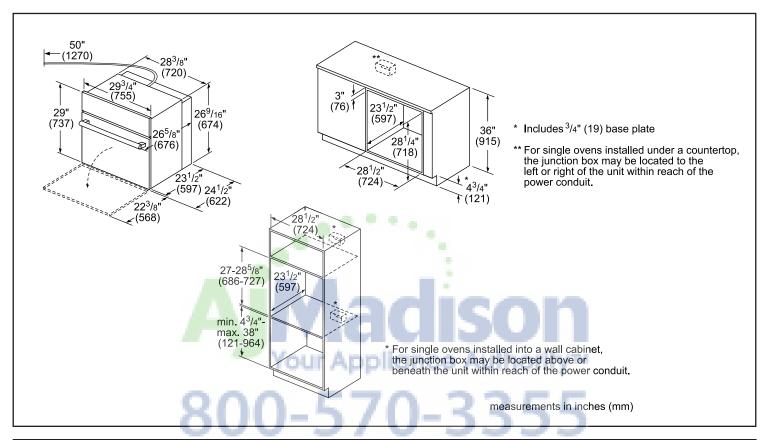

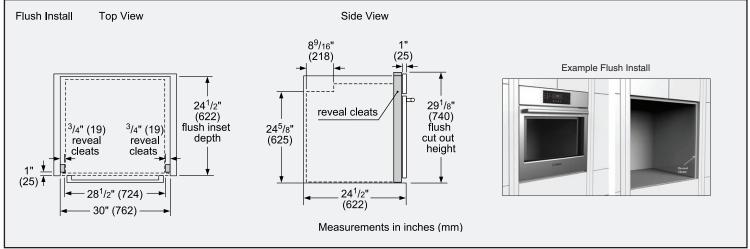

For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.


For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

24" Induction Cooktop

500 Series - Black NIT5469UC





Installation Details

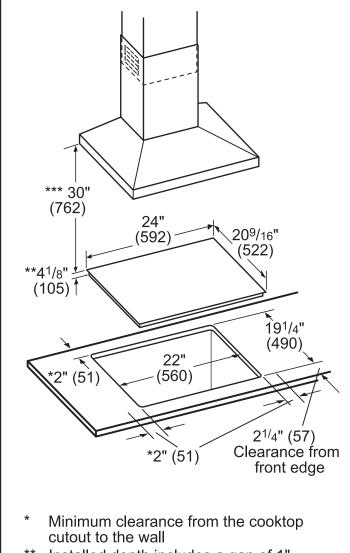

- ** Installed depth includes a gap of 1" (26 mm) for ventilation
- *** Minimum clearance between the cooktop surface and lower edge of the exhaust hood.

measurements in inches (mm)

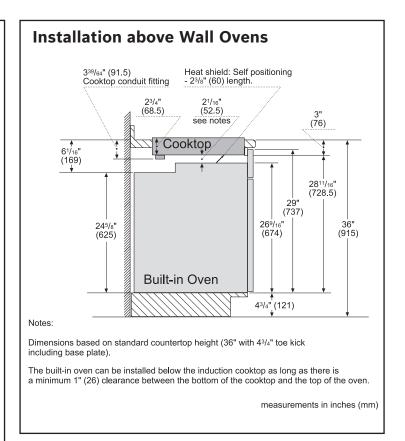

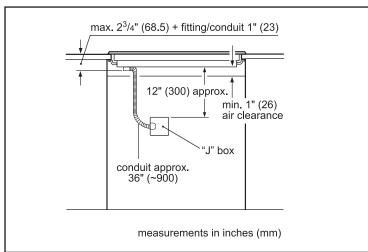

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

24" Custom Panel Dishwasher

800 Series DLX - Custom Panel SHV878ZD3N



Installation Details

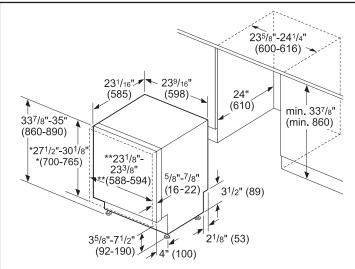



* measured from the bottom edge of the countertop panel thickness recommended 3/4" (20 mm).


This dishwasher can accept custom door panel weights ranging from 7 to 24 lbs; however, the dishwasher comes from the factory ready for custom panel door weights from 11 to 18 lbs. If you plan on using a door panel that is not 11 to 18 lbs. please contact customer service at (800) 944-2904.


** 24" (610 mm) wide panel may be used depending on cabinet design

Note: Refer to installation template for mounting hardware locations measurements in inches (mm)

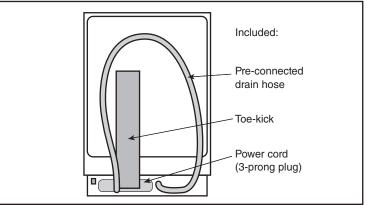

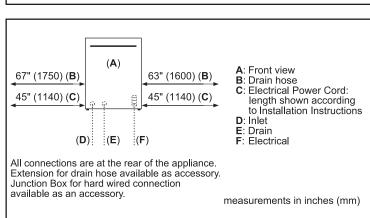

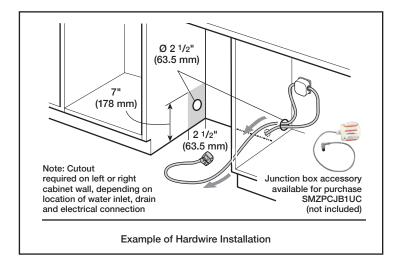

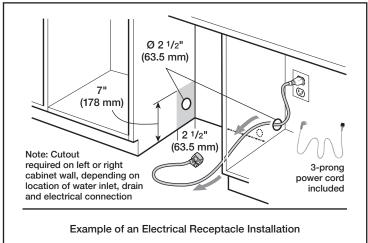

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.



SOLON™ Compost System, SKU512471

Stainless Steel

Planning information

Can be installed as drop-in or inset

What is included

Lid Diameter: 10" Bin Depth: 8"



Warranty

BLANCO offers a limited lifetime warranty on all sinks and faucets, as well as a one-year warranty on all custom accessories.

Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.



View our how-to videos to learn more about installing and caring for BLANCO products: https://www.blanco.com/us-en/service/how-to-videos/

Questions? Contact us today



BLANCO America, Inc. 110 Mount Holly By-Pass Lumberton, NJ 08048 Phone & Fax


Phone: 888-668-6201 Fax: 609-668-6211

While BLANCO endeavors to provide accurate information, all dimensions are nominal, cannot be guaranteed, and are subject to change or cancellation. BLANCO assumes no responsibility for use of superseded or voided specifications.



Prolific®

Under-Mount Kitchen Sink K-23651

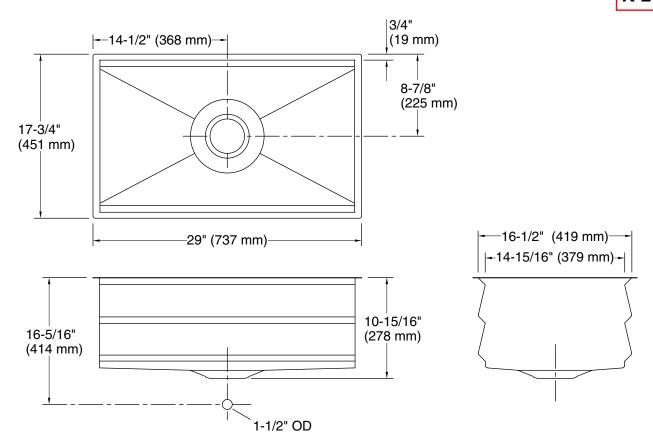

Technical Information

All product dimensions are nominal.

Installation:

Under-mount

Min. base cabinet

33" (838 mm)

width:

Bowl area (Only): Length: 27-1/2" (699 mm)

Width: 14-15/16" (379 mm) Bowl depth: 10" (253 mm) Water depth: 10" (253 mm)

Drain hole: 3-3/4" (94 mm)

Template: 1311446-7, required, included

Notes


Install this product according to the installation instructions.

Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-43-FOCUS). Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.





Top-/Under-Mount Bar Sink K-3840-3

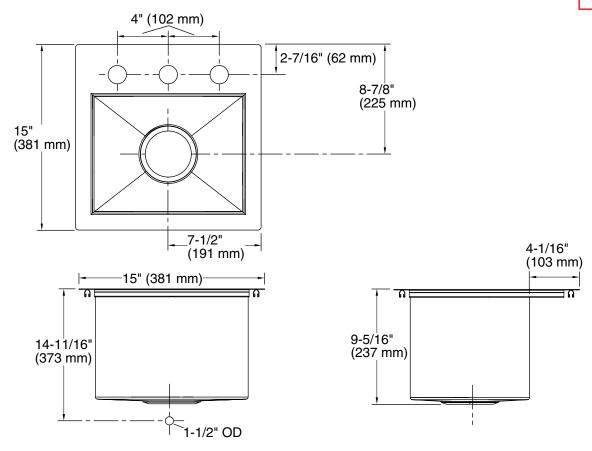

Technical Information

All product dimensions are nominal.

Bowl configuration: Single

Installation: Top-mount, Under-mount

Min. base cabinet 18" (457 mm)

width:

Bowl area (Only): Length: 12-1/4" (311 mm)

Width: 9-9/16" (243 mm) Bowl depth: 9" (229 mm)

Number of deck holes: 3

Faucet hole(s): 1-7/16" (37 mm)
Drain hole: 3-5/8" (92 mm)

Template: 1161548-7, required, included

Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.

ADA permits a parallel approach to wet bars.

