


24" Whole Bean Coffee System Plumbed


INSTALLATION SPECIFICATIONS

#CVA 6805


Front View

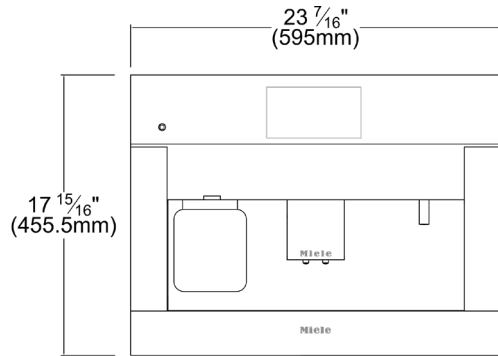


Side View

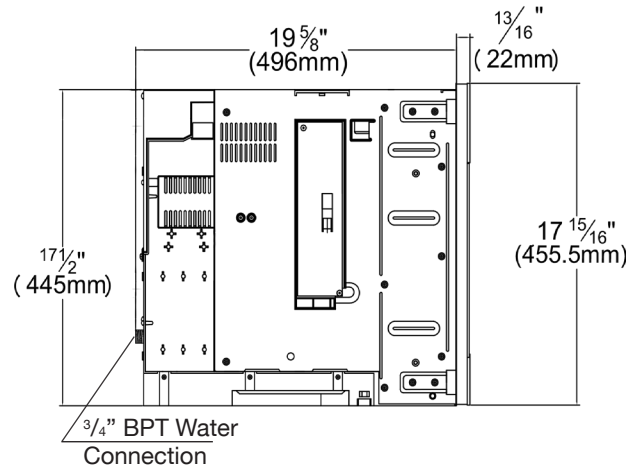

Rear View

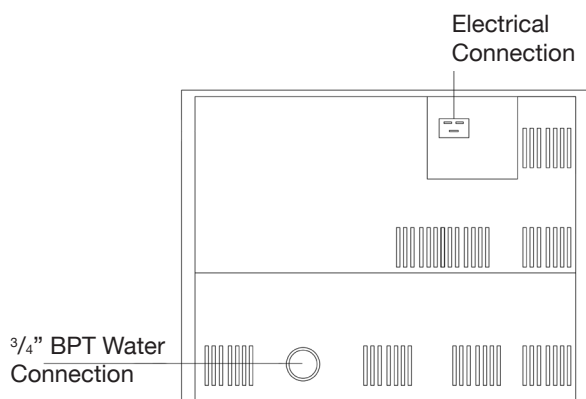

Top View, Door Open

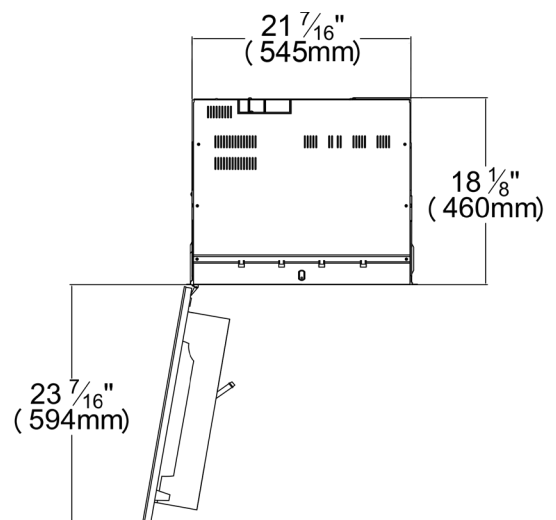


24" Whole Bean Coffee System
Plumbed

INSTALLATION SPECIFICATIONS

Solo Installation

#CVA 6805

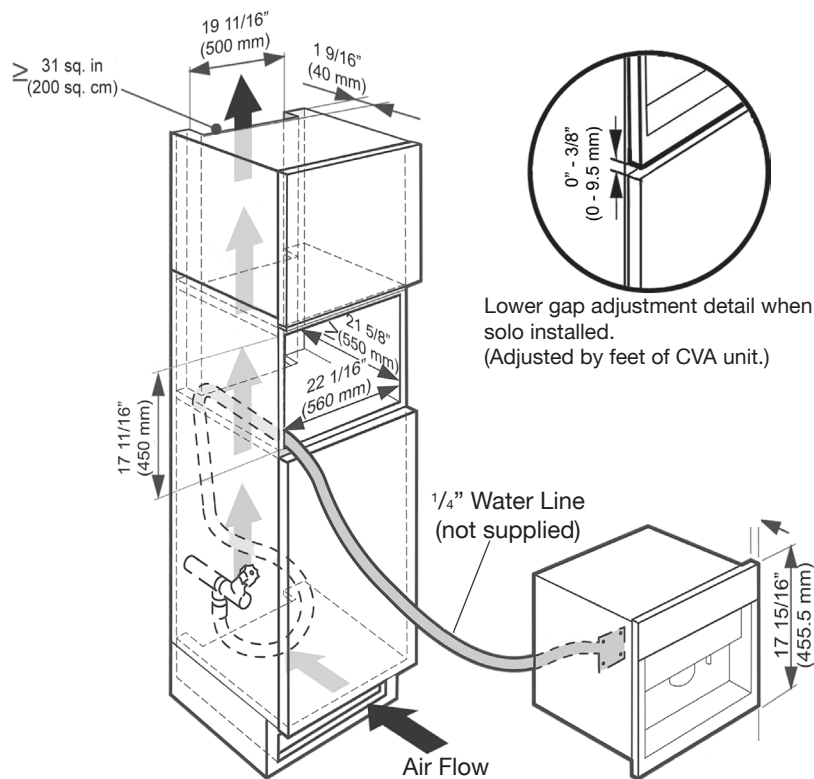


VENTILATION REQUIREMENTS


PLEASE NOTE:

Condensation water can damage the coffee system or surrounding cabinets. The specified ventilation cross-sections absolutely must be observed.

VENTILATION OPTIONS:

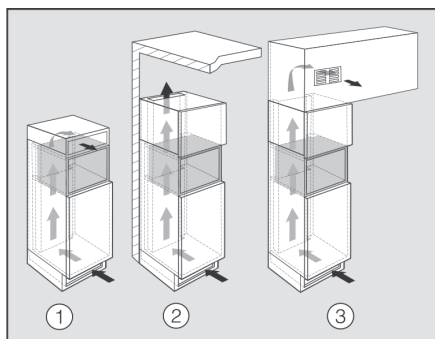

- ① Directly above the coffee system with a ventilation grille (free airflow of at least 31 square inches / 200 cm²)
- ② Between the surrounding cabinets and the ceiling
- ③ Through a suspended ceiling

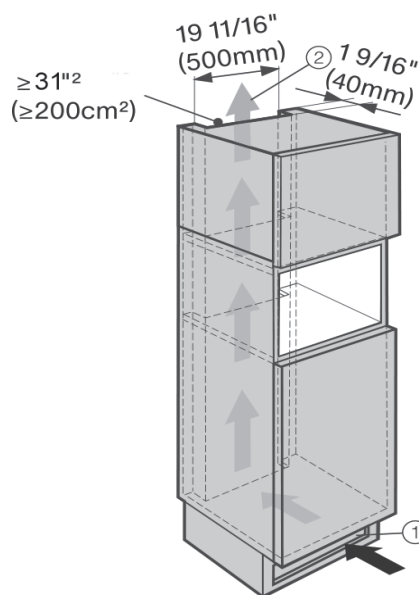


Air intake ① occurs via the plinth at the bottom of the appliance and the air escapes at the top ② at the rear of the surrounding cabinets.

24" Whole Bean Coffee System Plumbed

#CVA 6805

INSTALLATION SPECIFICATIONS With Warming Drawer (ESW 6x14)

PLEASE NOTE: Condensation water can damage the coffee system or surrounding cabinets. The specified ventilation cross-sections absolutely must be observed.

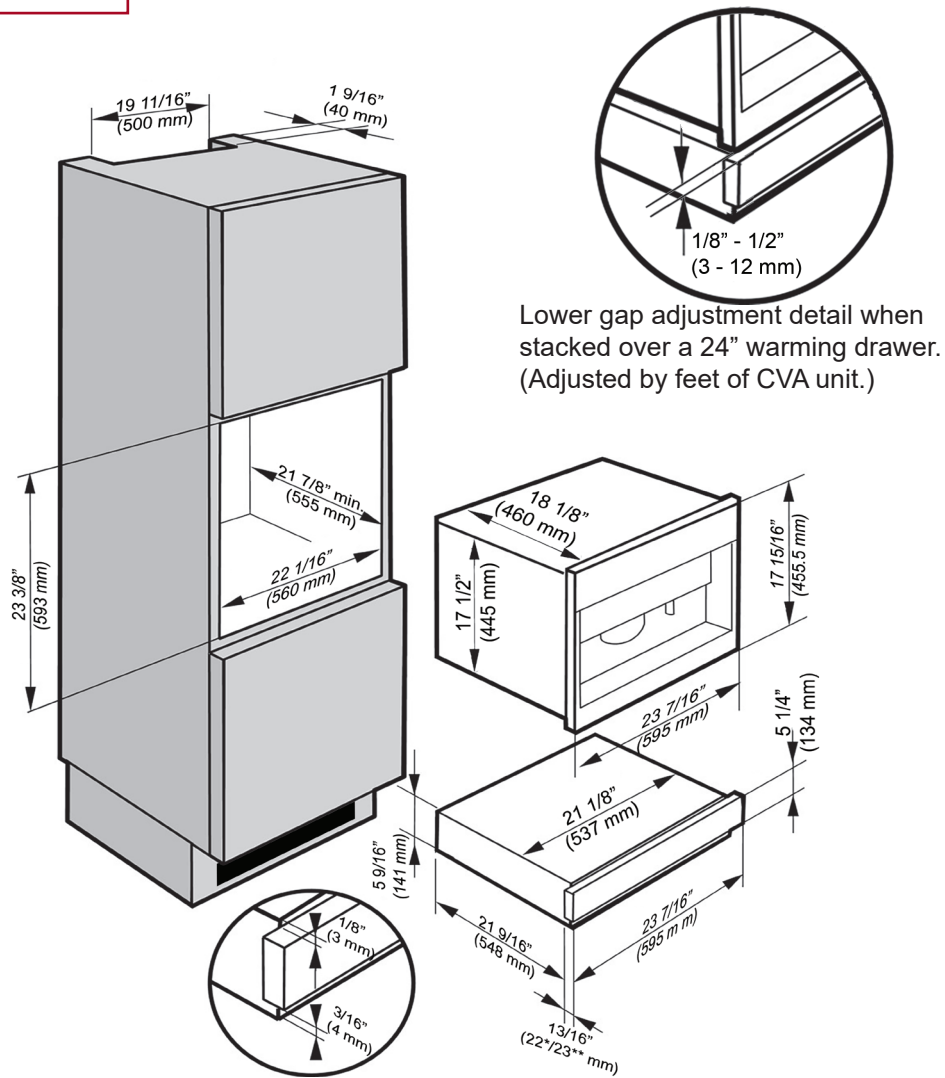


PureLine 30" Convection Oven H 6680 BP




PRODUCT VIEWS

Isometric

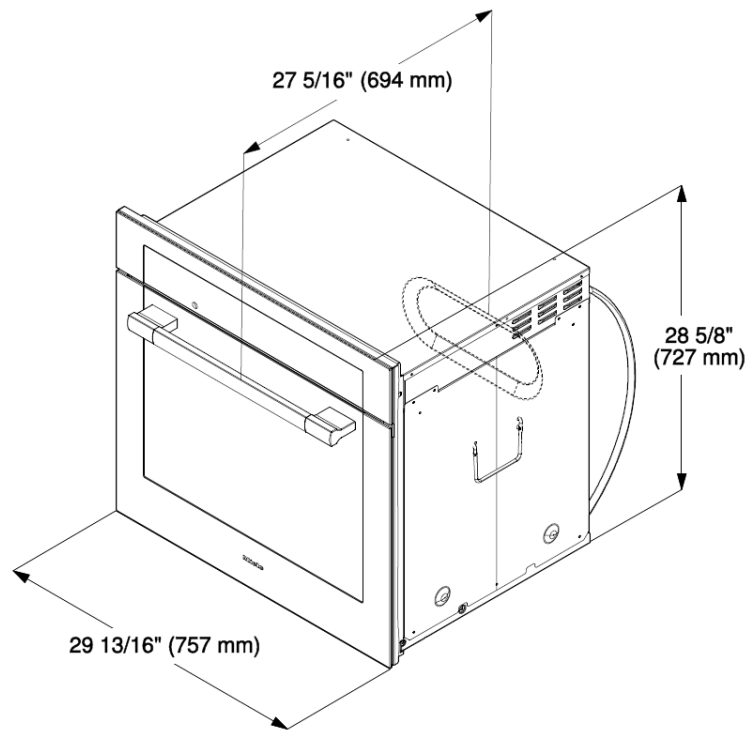

Front

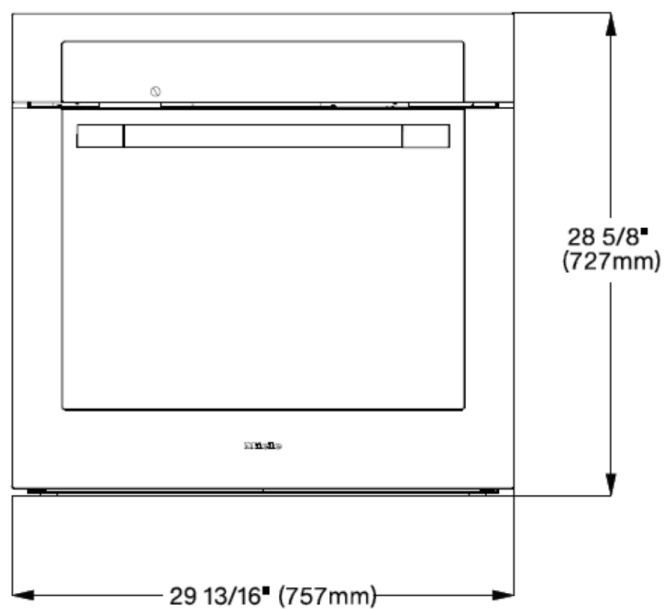


PureLine 30" Convection Oven H 6680 BP




PRODUCT VIEWS

Top View

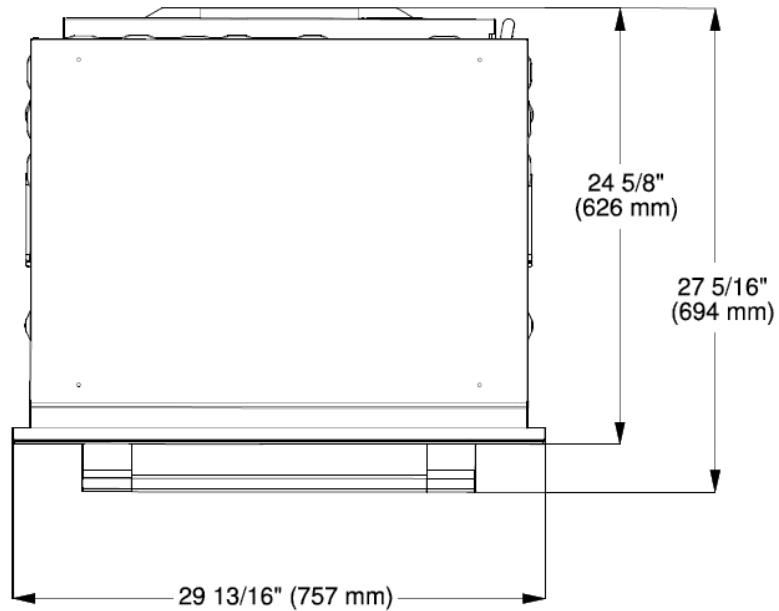


Rear View

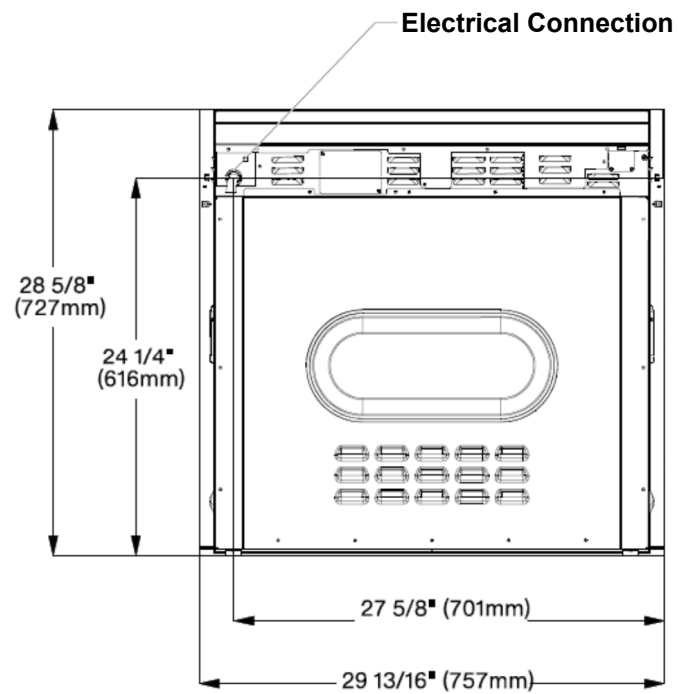


Miele

Side View

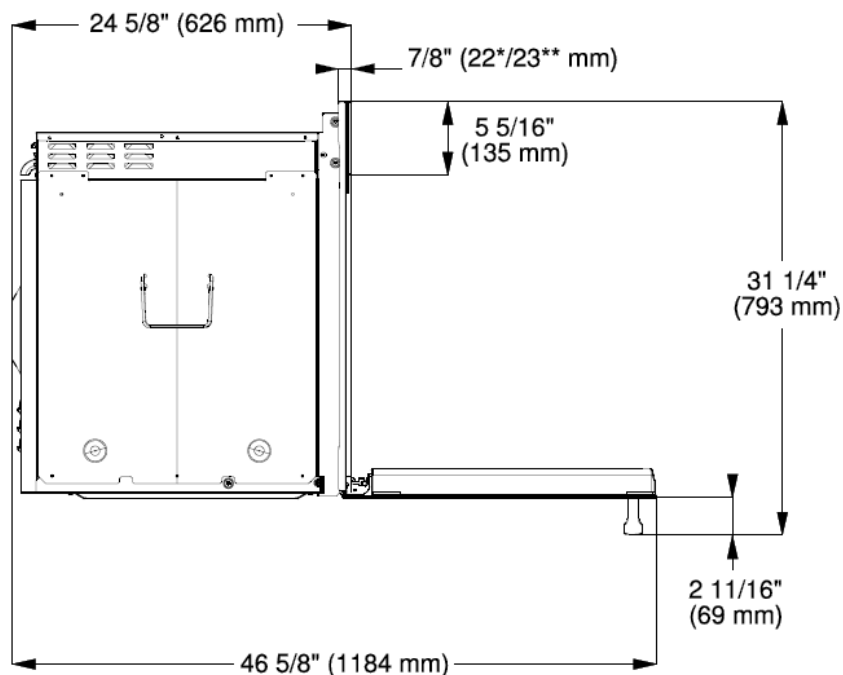

Install in Tall Cabinet

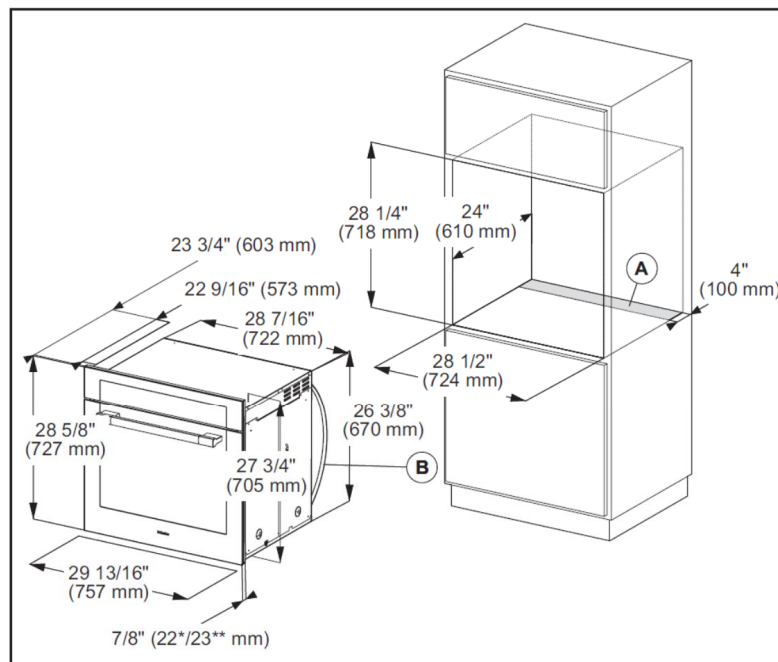


- Ⓐ Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug
- * Oven with glass front
- ** Oven with metal front

PureLine 60cm Speed Oven H 6800 BM




PRODUCT VIEWS

Fascia

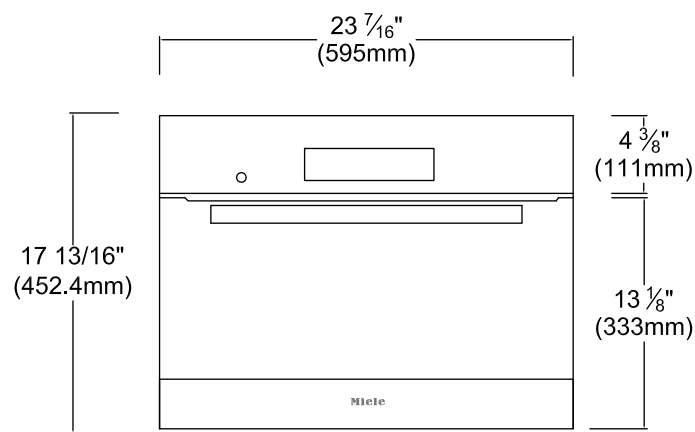

Top View

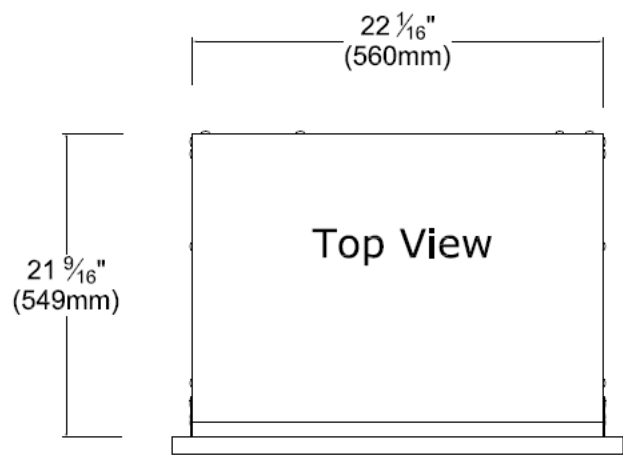


PureLine 60cm Speed Oven H 6800 BM




PRODUCT VIEWS

Rear View

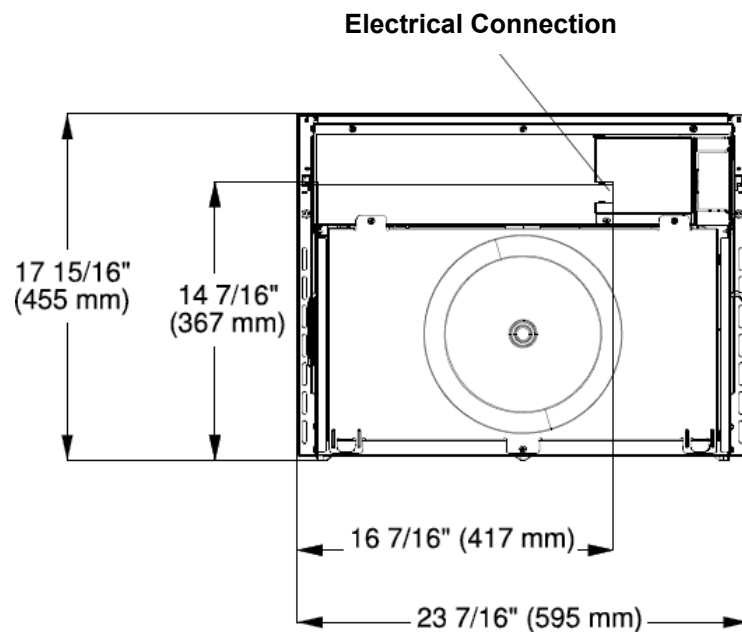

Side View

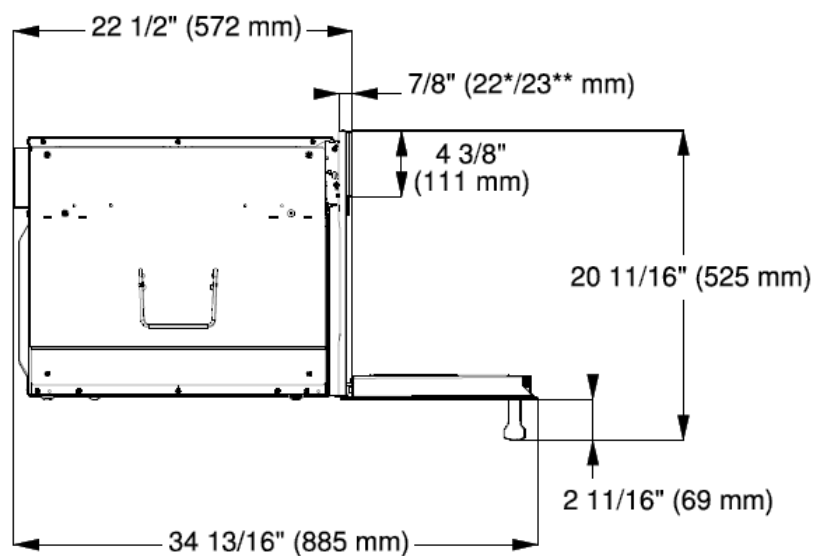

* Oven with glass front


** Oven with metal front

PureLine 60cm Speed Oven H 6800 BM




INSTALLATION SPECIFICATIONS

Install in Tall Cabinet

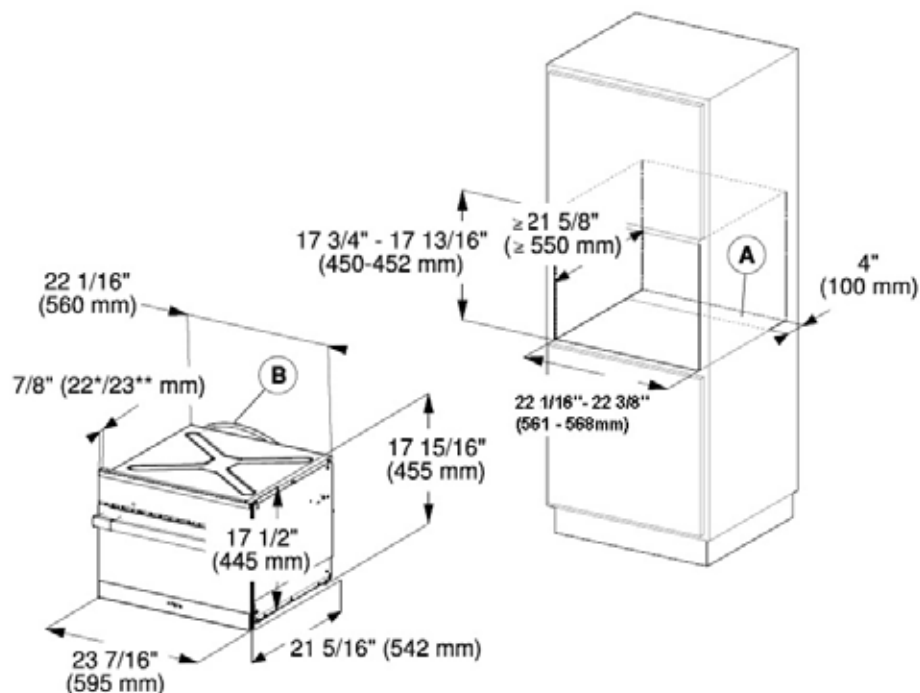

* Oven with glass front
** Oven with metal front

Undercounter Installation

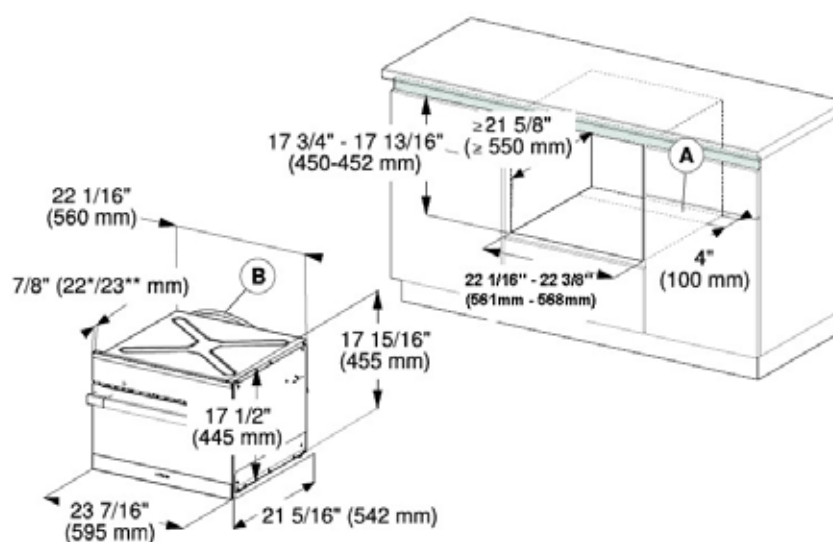

* Oven with glass front
** Oven with metal front


PureLine 60cm Speed Oven H 6800 BM



INSTALLATION SPECIFICATIONS

Door Swing

Front dimensions

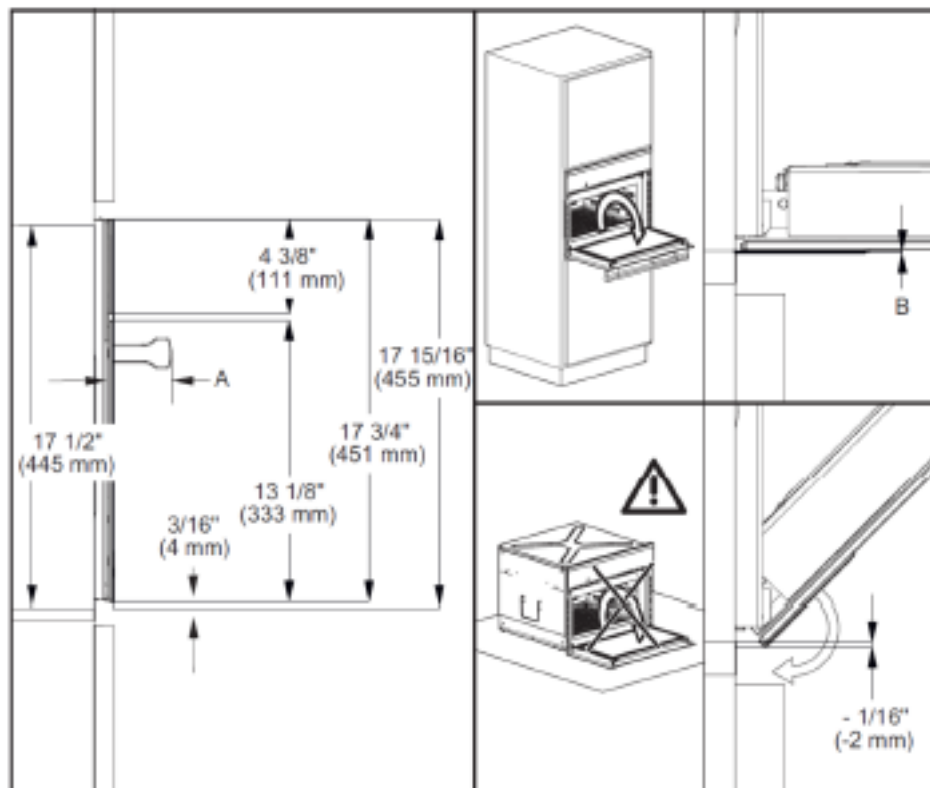

A H67xx: 2 3/4" (69 mm)

H68xx: 1 5/8" (42 mm)

B Speed Oven with glass front: 1/16" (2.2 mm)

Speed Oven with metal front: 1/16" (1.2 mm)


DTI36M977BB

36-INCH INDUCTION COOKTOP

MODERNIST COLLECTION




APPLIANCE DIMENSIONS

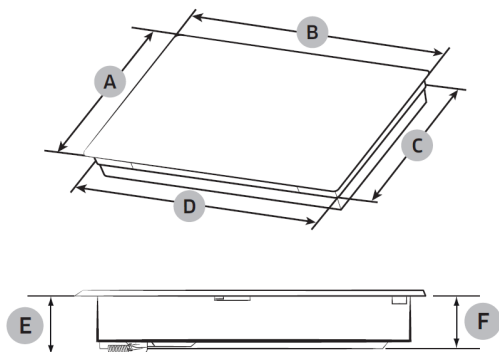

APPLIANCE DIMENSIONS

A	21 1/4" (540mm)	Frame depth
B	36" (914.4mm)	Frame width
C	19" (481.6m)	Case depth
D	33 3/4" (856.6mm)	Case width
E	4" (101mm)	Conduit case height
F	3 1/8" (80.5mm)	Case height


COUNTERTOP CUTOUT DIMENSIONS

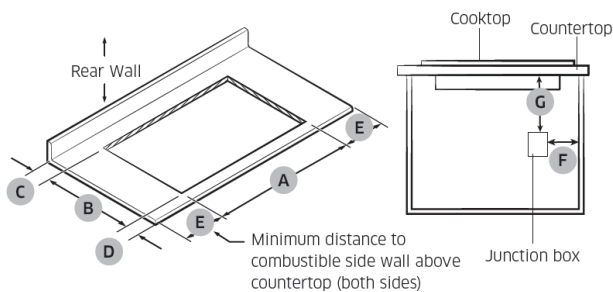

COUNTERTOP CUTOUT DIMENSIONS

A	33 6/7" - 34" (860mm - 864mm)
B	19 1/8" - 19 1/5" (485.6mm - 487.6mm)
C	Min. 1 1/7" (28mm). Between cutout and the wall behind the cooktop.
D	Min. 1 1/2" (38mm). From front edge of cutout and front edge of cooktop.
E	Min. 1" (26mm). Distance nearest left and right side combustible surface above cooktop.
F	Junction Box or outlet 10" (254mm) maximum from right-hand side of cabinet
G	Junction Box or outlet 15" (381mm) minimum from bottom of countertop

WALL OVEN UNDERCOUNTER CUTOUT DIMENSIONS

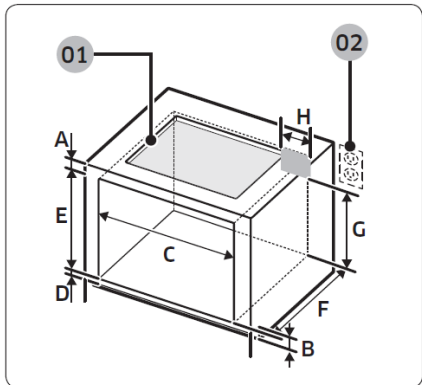

UNDERCOUNTER CUTOUT DIMENSIONS


A	Min. 3 3/4" (9.5cm)
B	4" (10.1cm)
C	Min. 28 1/2" / Max. 28 5/8" (Min. 2.5cm / Max. 3.2cm)
D	Min. 1" / Max. 1 1/4" (Min. 2.5cm / Max. 3.2cm)
E	Min. 27 1/4" / Max. 27 1/3" (Min. 69.2cm / Max. 69.5cm)
F	24" (61cm)
G	Min. 22" (Min. 55.9cm)
H	Max. 9 1/2" (Max. 24.1cm) - Junction Box

01 - See built-in oven installation for complete installation instructions. See label on top of approved built-in oven models.

02 - Refer to Oven Manual installation.


RANGEHOOD DIMENSIONS

**Faber Hood
#INHC35SSV**


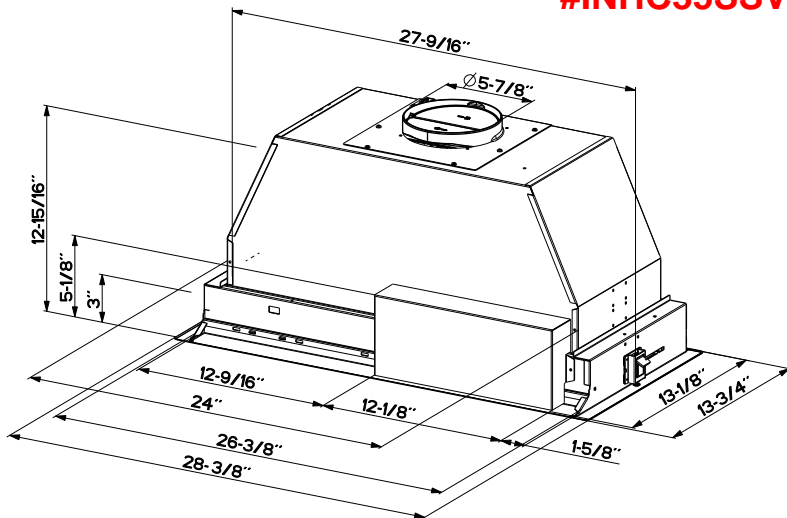


INHC29SSV

REAR RANGEHOOD DIMENSIONS

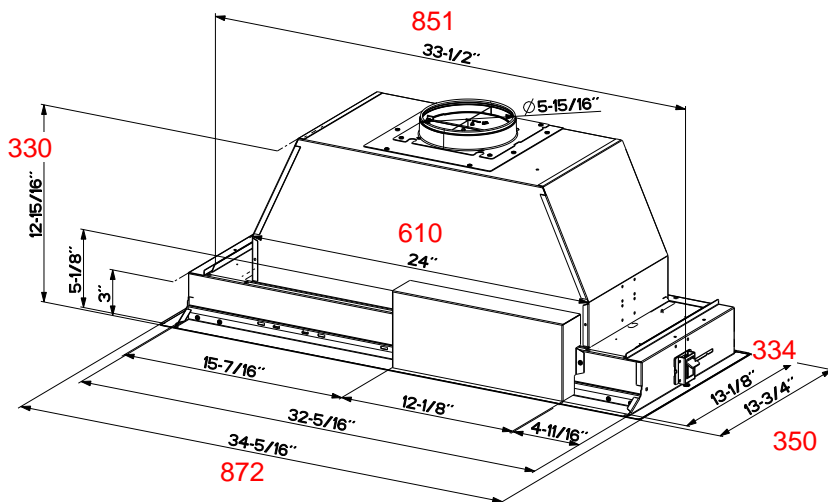


INHC35SSV

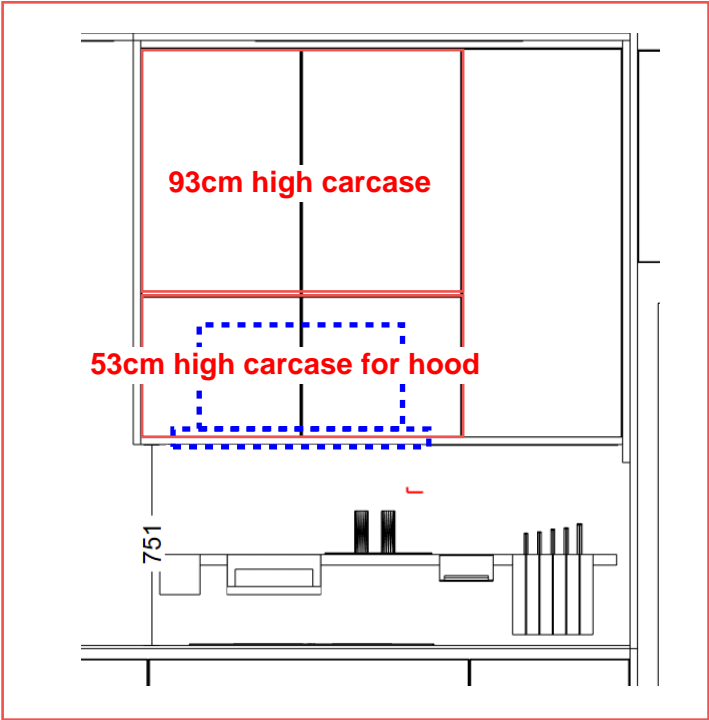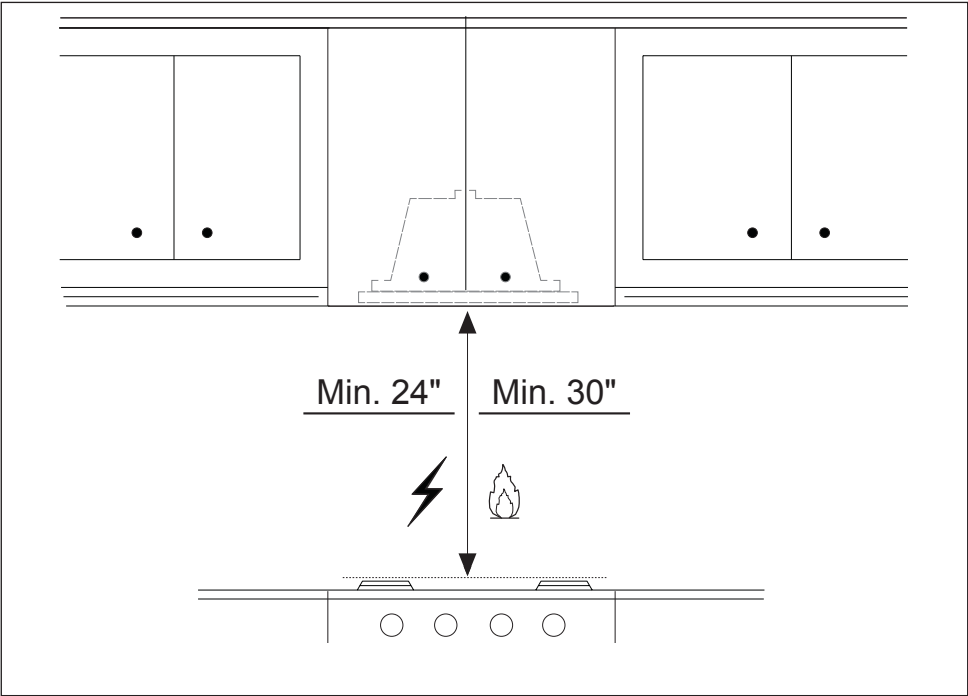


Only for Ducted Venting Installation

Install Damper that is included with the Hood before connecting to the ductwork.




Choose your ducting method

Ducted Venting Installation

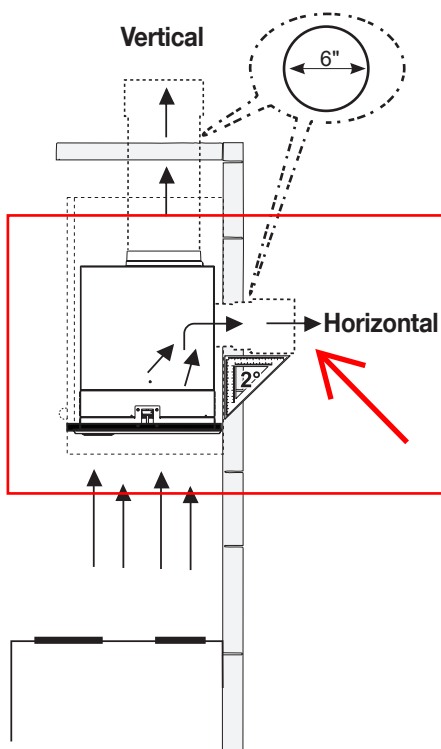

Non Ducted - Recirculation


Requires purchase of Activated Charcoal Accessory

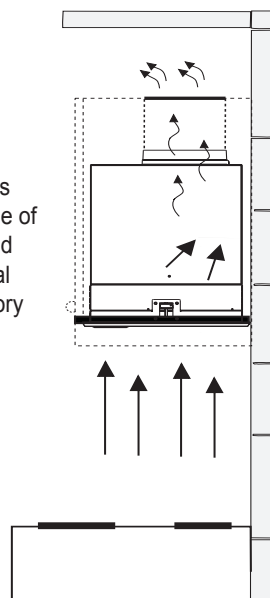

Installation Instructions


1

Hood	29"	35"	
X	27 5/8"	33 3/4"	857
Y	13 9/16"	13 9/16"	344

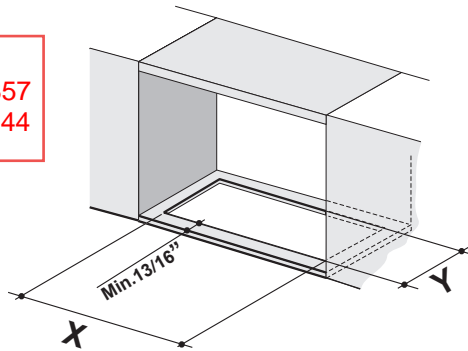

Cut out the opening in the underside of the cabinet as shown in Figure 1.



2

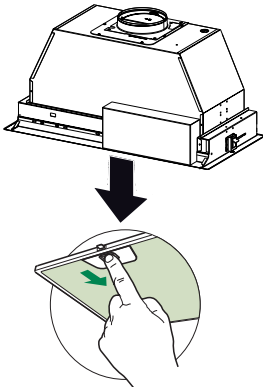

Remove the filters from the Insert Hood before installing into cabinet.

3.a

Ducted (in front of Vertical)

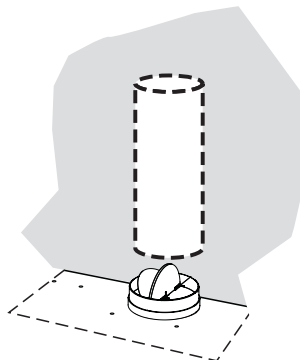



Install Roof or Wall Cap purchased separately. Connect the 6" metal ductwork to the Roof or Wall Cap and then attach ductwork.

Fully Integrated 24" Wine Storage System

KWT 1613 Vi / KWT 1603 Vi



FOR FLUSH INSTALLATION

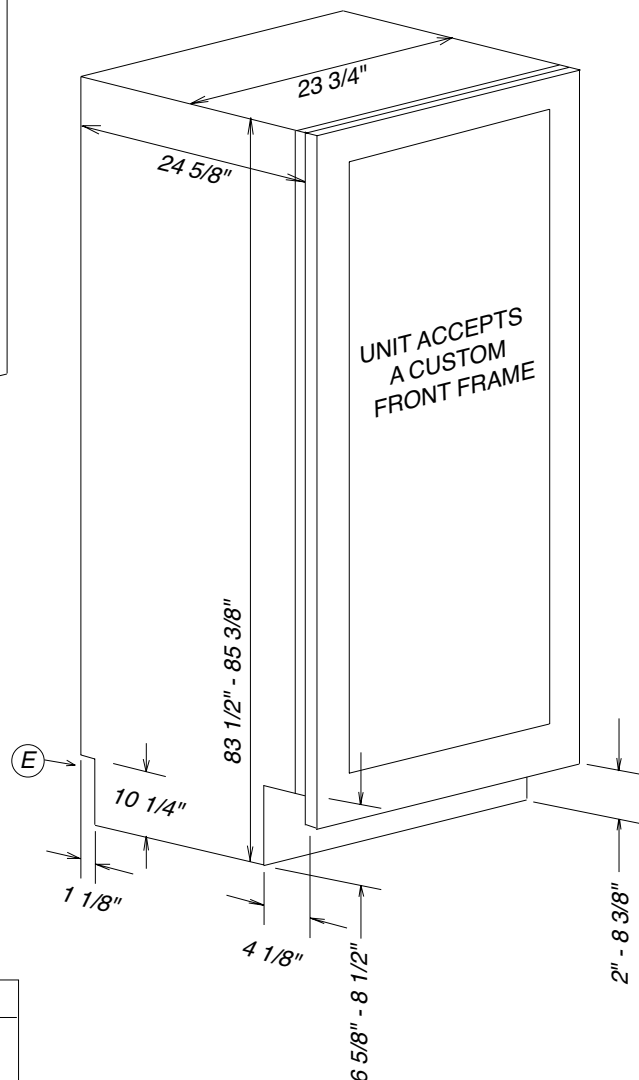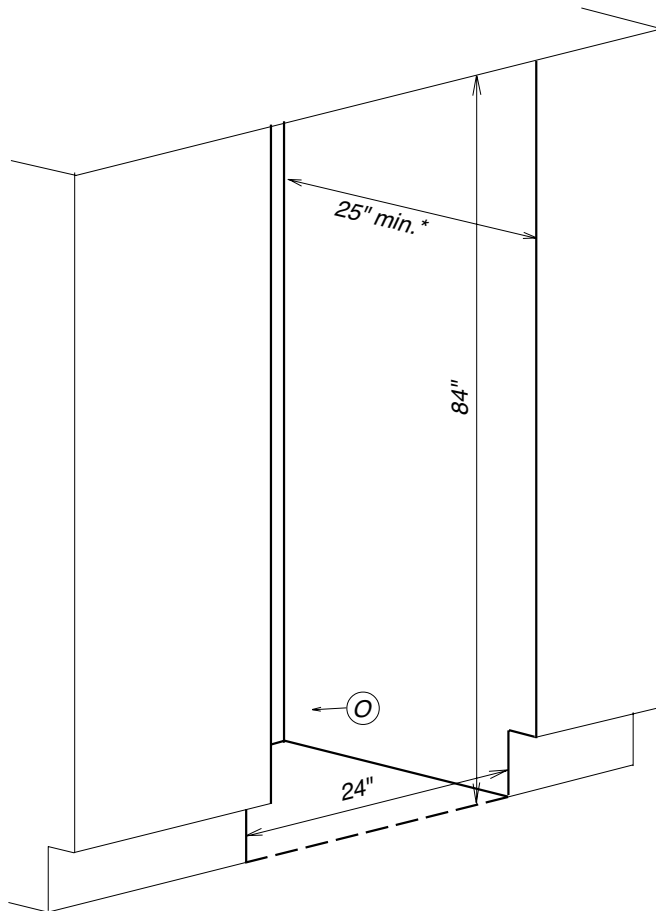

Location Codes
E - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear
O - Standard NEMA 5-15 Duplex Outlet - locate less than 9" above finished floor
Notes
<ul style="list-style-type: none"> • All Installations must be done in accordance with local codes • Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish • For Proud Installation - please adjust accordingly


* Depth assumes a 3/4" panel, please adjust according to custom panel thickness

Fully Integrated 24" Wine Storage System

KWT 1613 Vi / KWT 1603 Vi



GLASS DIMENSIONS

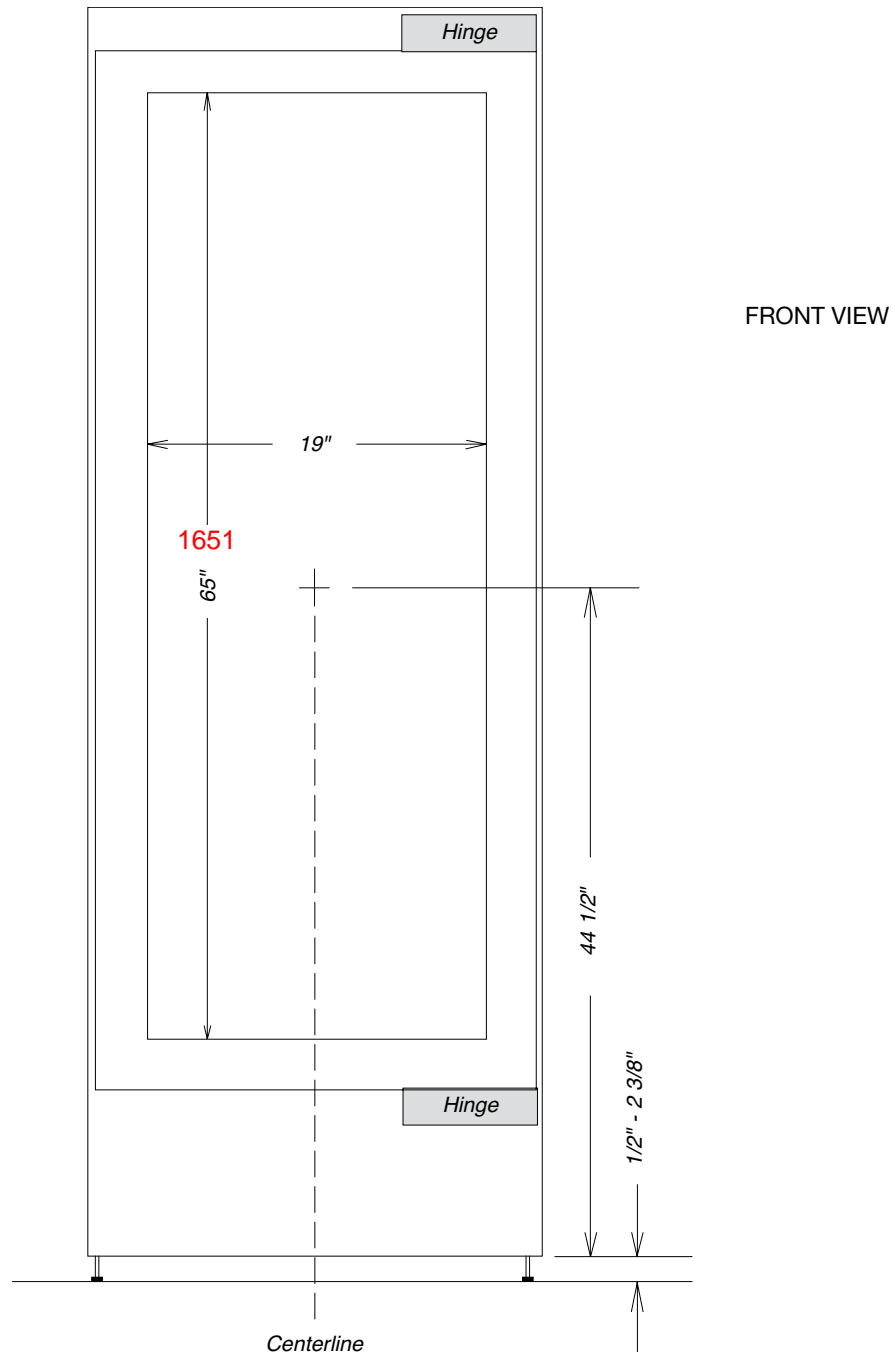

Notes

- Centerpoint is 45 1/2" with typical 84" installation

Fully Integrated 24" Wine Storage System


KWT 1613 Vi / KWT 1603 Vi



CUSTOM PANEL INSTALLATIONS

These units do not come equipped with a front panel. They are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the panels to align with the surrounding cabinets.

Panel size is determined in the following manner:

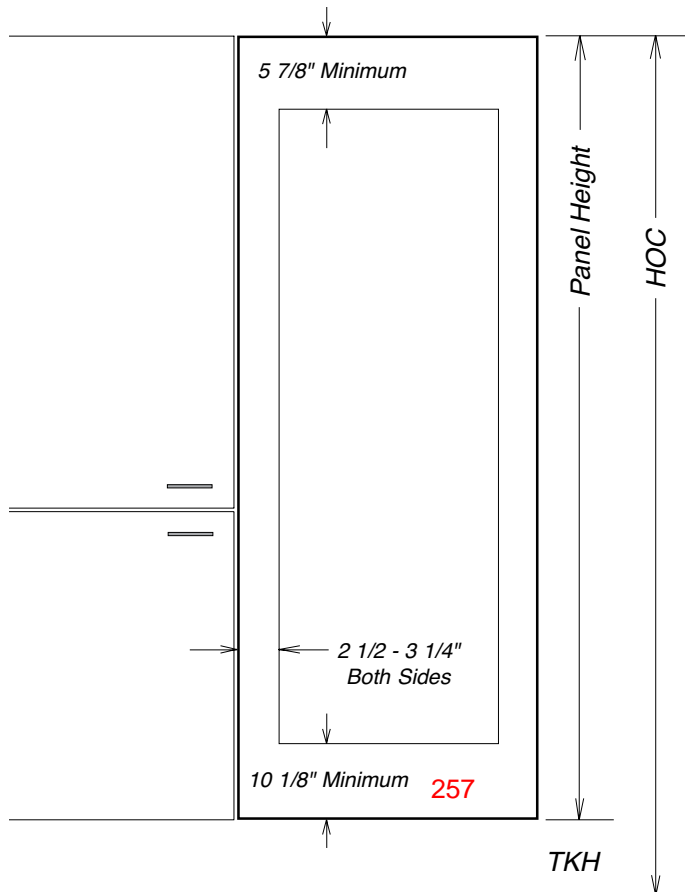

Width: 23 3/4" in all cases

Thickness: Minimum 3/4" outside frame

Height: Determined using the following calculation:

$$\text{Panel Height} = \text{HOC} - \text{TKH}$$

HOC = Total height of cabinet or side panel


TKH = Toe-kick height

Note: Finish back side of panels to insure appearance
Panel may extend above unit. This is **not** considered in height calculation

Maximum panel weight 136.7 Pounds

Panel Notes

If the adjoining cabinets are taller than the height of machine (HOM) - the front panel may be extended accordingly. Simply maintain the toekick height and extend the panel the needed distance.

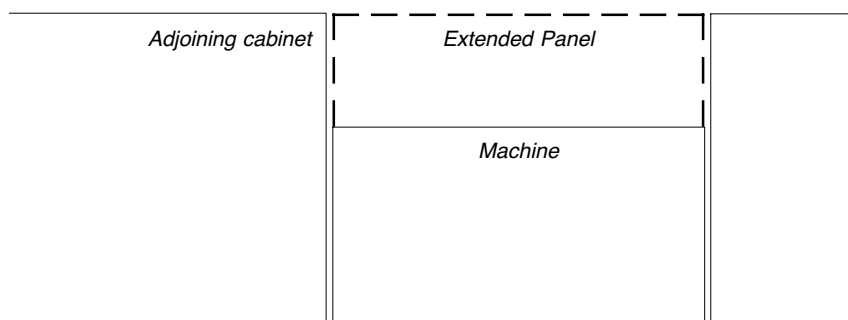

Fully Integrated 24" Wine Storage System


KWT 1613 Vi / KWT 1603 Vi




HINGING DETAILS

90° Door

Thickness options

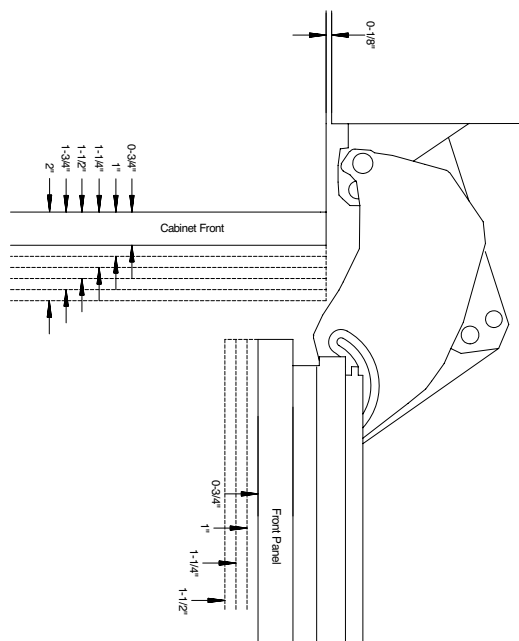


Door Swing

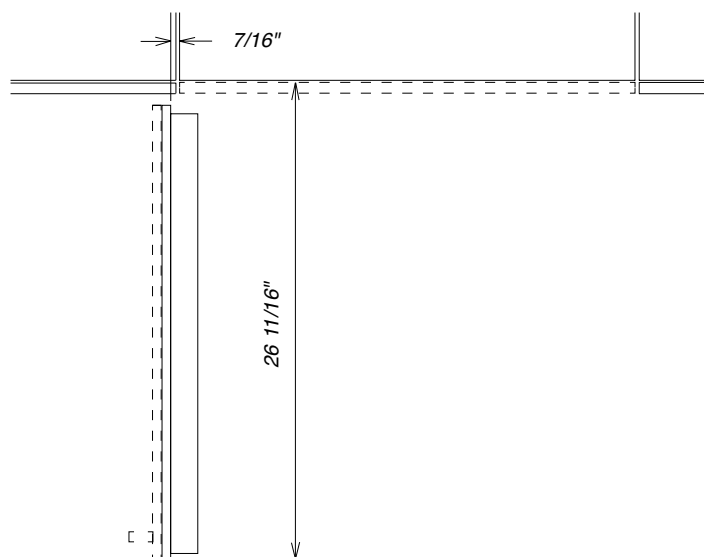


NOTE: Additional space needed depending on thickness of front panels and handle used

115° Door

Thickness options

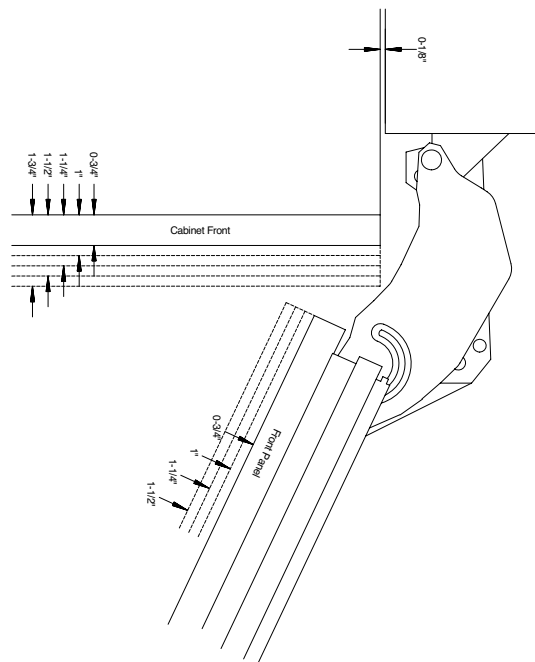

Door Swing

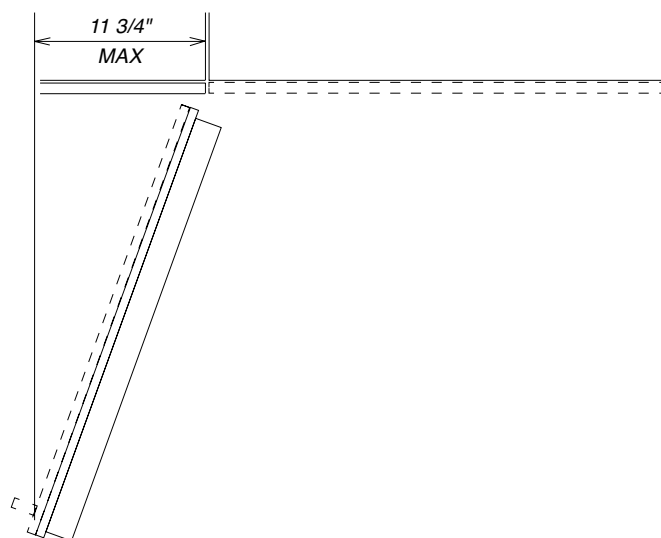


NOTE: Additional space needed depending on thickness of front panels and handle used

Fully Integrated 24" MasterCool

#F 2672 Vi

CUTOUT DIMENSIONS

- Niche depth assumes a 3/4" (19 mm) panel, please adjust according to custom panel thickness

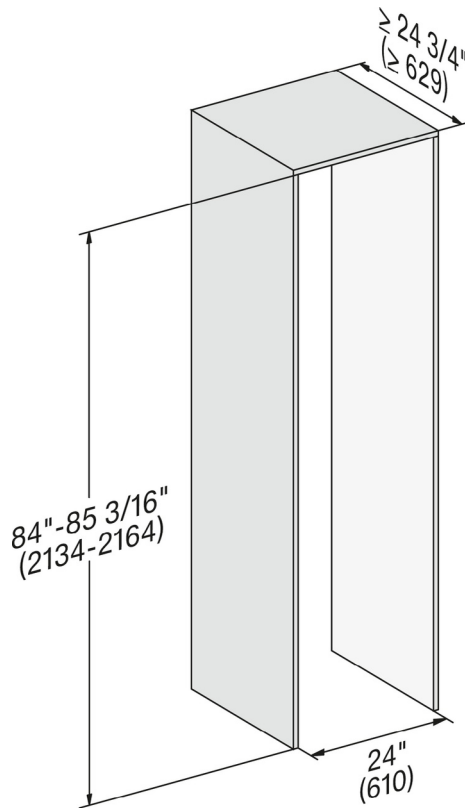


CUTOUT DETAILS

- The electrical connection must not be positioned higher than 9" (228.6 mm) above the floor.
- The 1/4" (6.4 mm) plumbed water connection should not be positioned higher than 2" (50.8 mm) above the floor.

Notes:

In case of an emergency the electrical outlet must be easily accessible and must not be concealed behind the appliance.

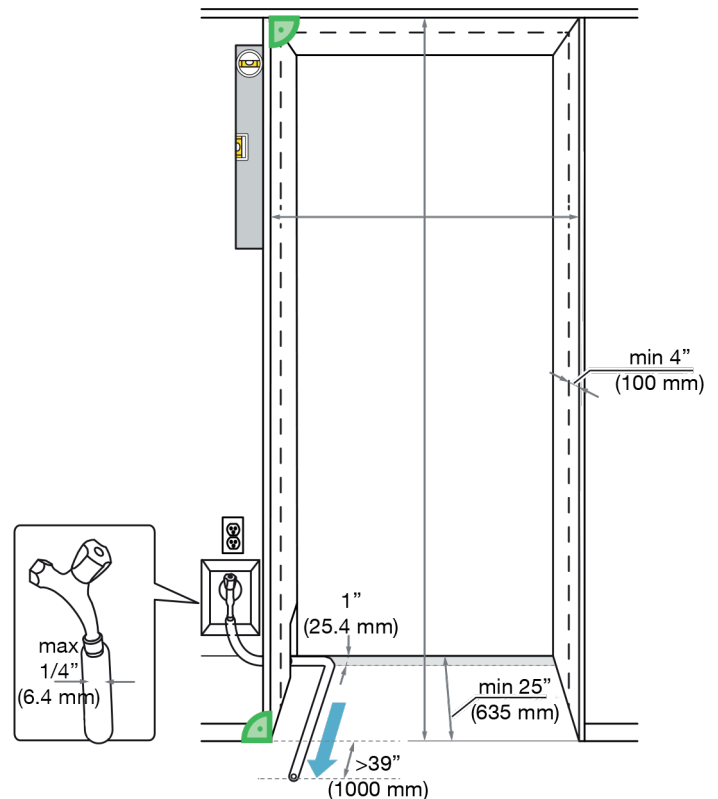


Fully Integrated 24" MasterCool

#F 2672 Vi

POWER SUPPLY AND WATER CONNECTION

(Water Connection For F 26x2 Vi Only)


Rear View

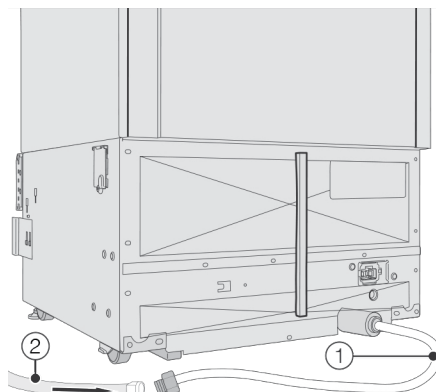

Water Connection:

- 1/4" water line is required
- Located at the rear of the appliance on a 4' 11" line.
- 1/4" compression fitting, ready to accept 1/4" line.

Side View

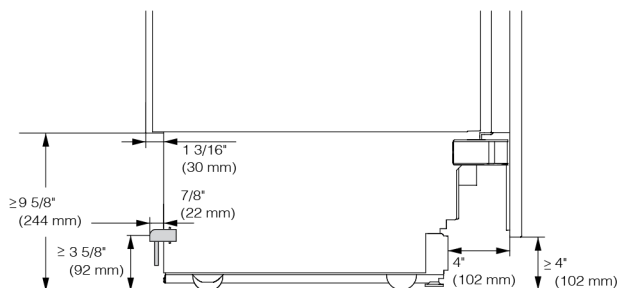

Notes:

- In case of an emergency the electrical outlet and water shutoff must be easily accessible and must not be concealed behind the appliance.
- In the event that connection points are located behind the unit the electrical outlet and water connection should be located no higher than 9 5/8" from the floor.


Fully Integrated 24" MasterCool

#F 2672 Vi

CUSTOM PANEL INSTALLATIONS

For Models:

- K 2602 Vi
- K 2612 Vi

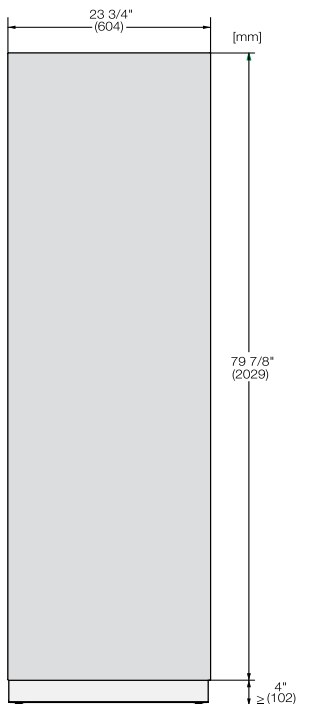


Max. Panel Weight: 106 lbs

Optional Accessory:
Clean Touch Steel Panel:
• KFP 2405
Material# 11499070

For Models:

- F 2662 Vi
- F 2672 Vi

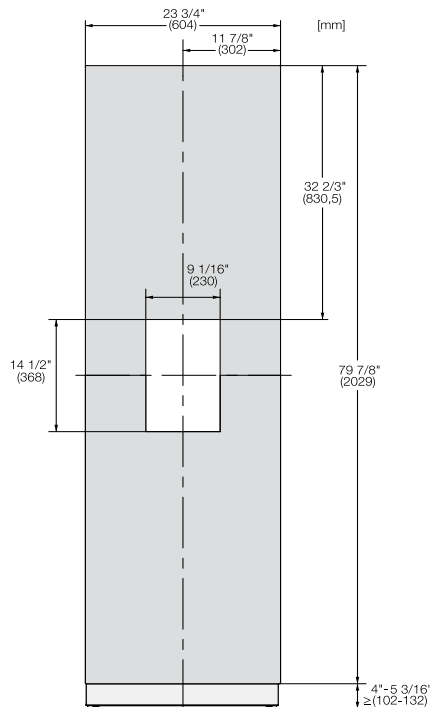


Max. Panel Weight: 143 lbs

Optional Accessory:
Clean Touch Steel Panel:
• KFP 2445
Material# 11499620

For Models:

- KWT 2602 Vi
- KWT 2612 Vi
- KWT 2662 ViS
- KWT 2672 ViS

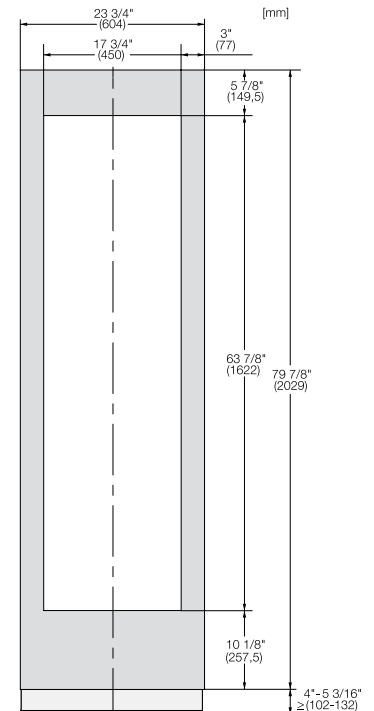


Max. Panel Weight: 137 lbs

Optional Accessory:
Clean Touch Steel Panel:
• KFP 2455
Material# 11499630

PANELS NOTES

If the adjoining cabinets are taller than the height of the machine the panel may be extended accordingly

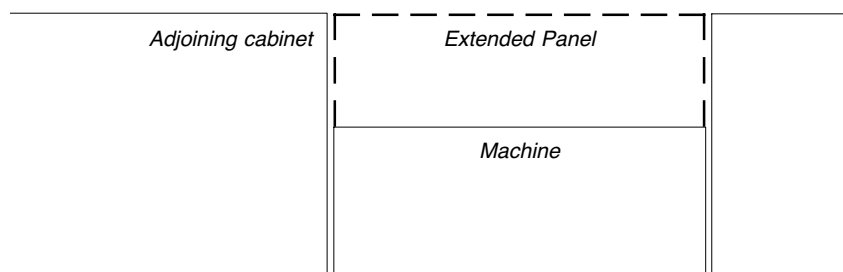


Fully Integrated 24" MasterCool

#F 2672 Vi

HINGING DETAILS 115° OPENING


Available for the following models:

- K 26x2 Vi
- F 26x2 Vi
- KWT 26x2 Vi(S)

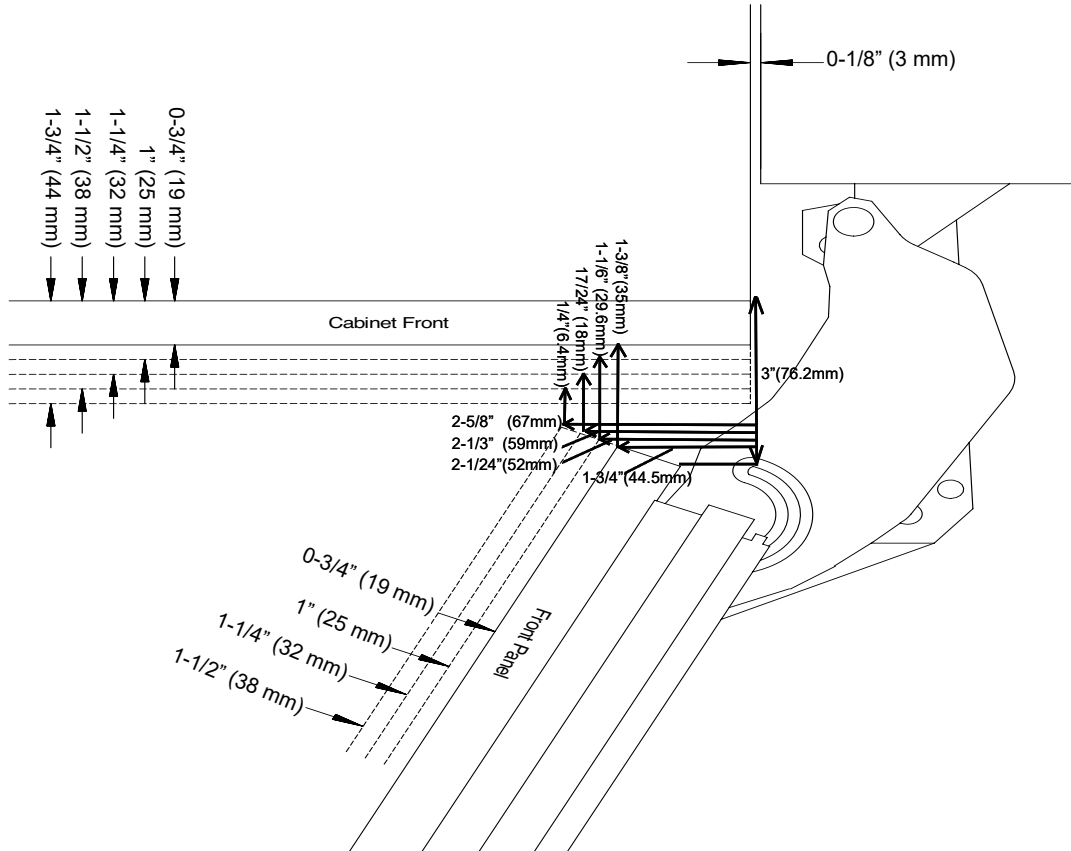

Top View

(K 26x2 Vi, F 26x2 Vi, KWT 26x2 Vi(S))

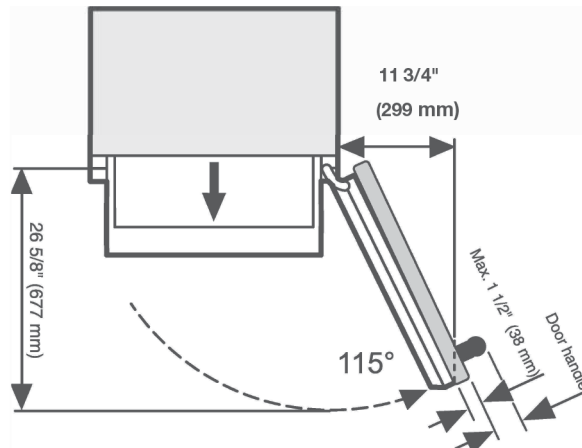



Fully Integrated 24" MasterCool

#F 2672 Vi

HINGING DETAILS 90° OPENING


Available for the following models:

- K 26x2 Vi
- KWT 26x2 Vi(Si)

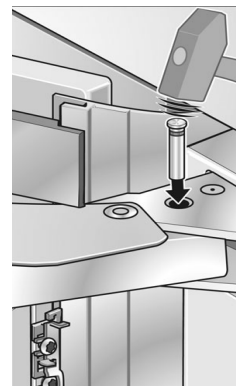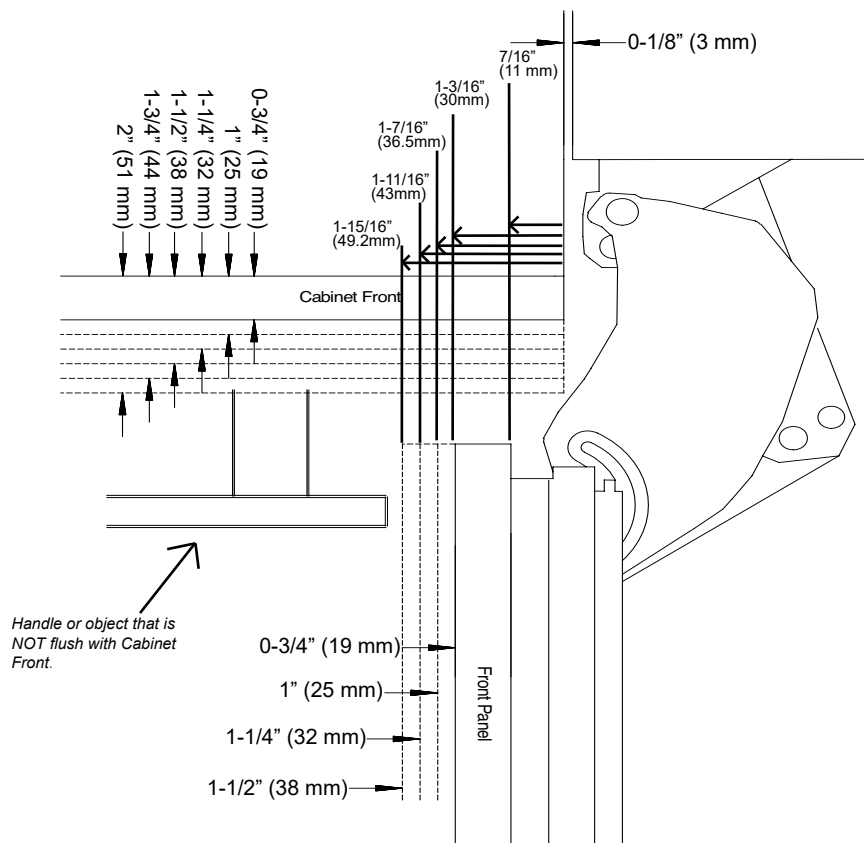

Top View

(K 26x2 Vi, KWT 26x2 Vi(S))

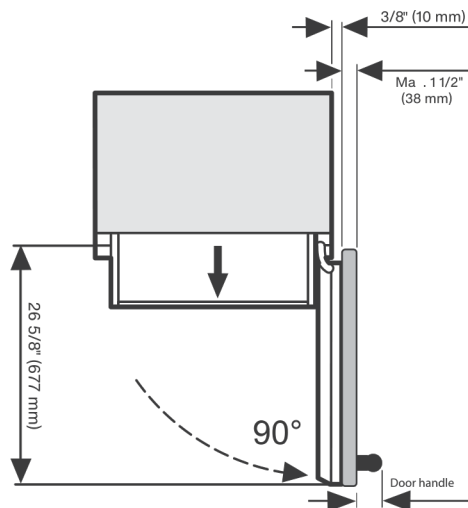

When installing hinge side next to an appliance or object that is within range of the door panel, limit the door opening angle to 90°. This is done by installing the banking pin as illustrated. Insert the banking pin through the holes and drive in with a hammer.


Freezer units cannot be stop pinned at 90°

Fully Integrated
30" MasterCool

#K 2802 Vi

CUTOUT DIMENSIONS

- Niche depth assumes a 3/4" (19 mm) panel, please adjust according to custom panel thickness

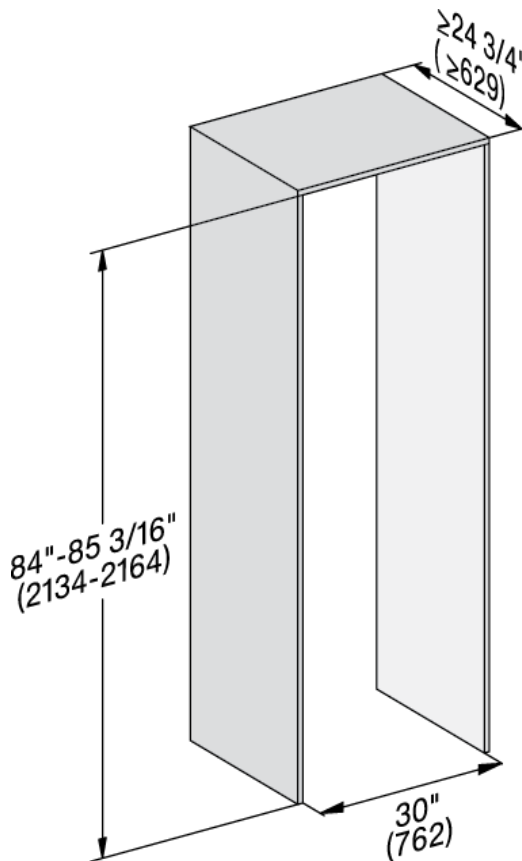


CUTOUT DETAILS

- The electrical connection must not be positioned higher than 9" (228.6 mm) above the floor.
- The 1/4" (6.4 mm) plumbed water connection should not be positioned higher than 2" (50.8 mm) above the floor.

Notes:

In case of an emergency the electrical outlet must be easily accessible and must not be concealed behind the appliance.

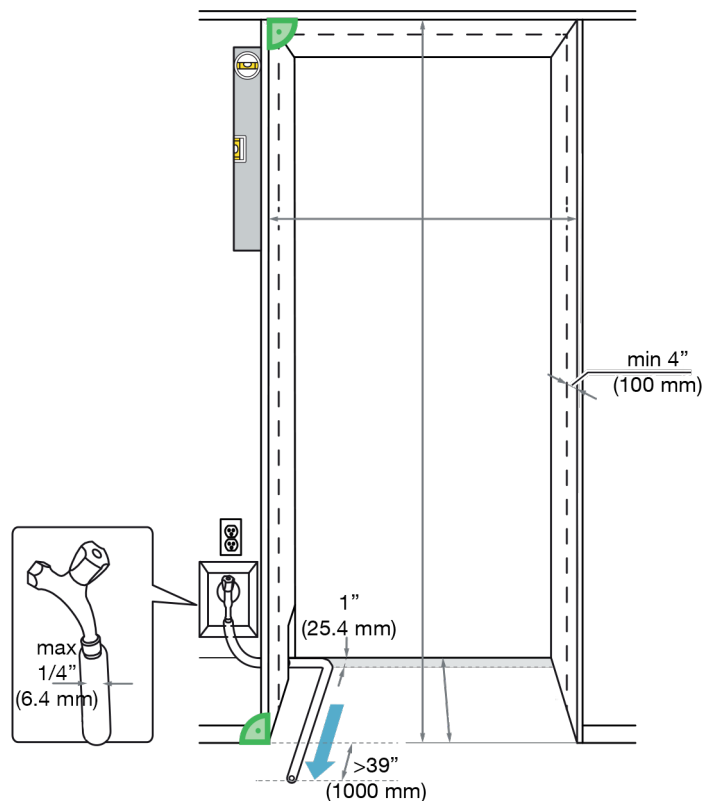


Fully Integrated 30" MasterCool

#K 2802 Vi

POWER SUPPLY AND WATER CONNECTION

(Water Connection For F 28x2 Vi & KF 28x2 Vi Only)


Rear View

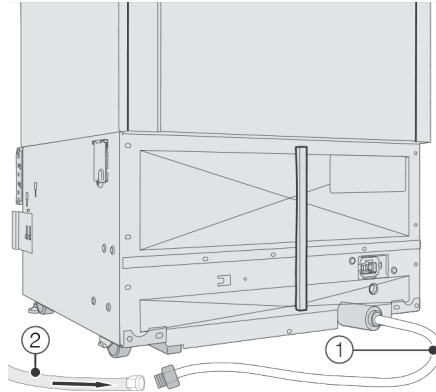

Water Connection:

- 1/4" water line is required
- Located at the rear of the appliance on a 4' 11" line.
- 1/4" compression fitting, ready to accept 1/4" line.

Side View

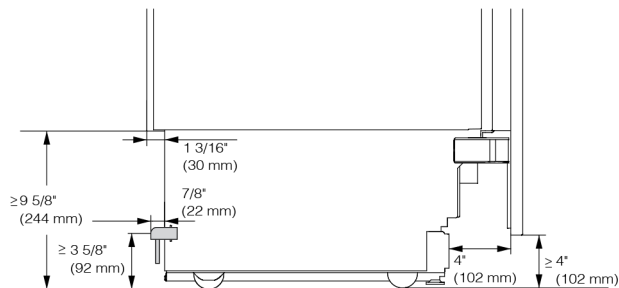

Notes:

- In case of an emergency the electrical outlet and water shutoff must be easily accessible and must not be concealed behind the appliance.
- In the event that connection points are located behind the unit the electrical outlet and water connection should be located no higher than 9 5/8" from the floor.


Fully Integrated 30" MasterCool

#K 2802 Vi

CUSTOM PANEL INSTALLATIONS

For Models:

- F 2802 Vi
- F 2812 Vi
- K 2802 Vi
- K 2812 Vi

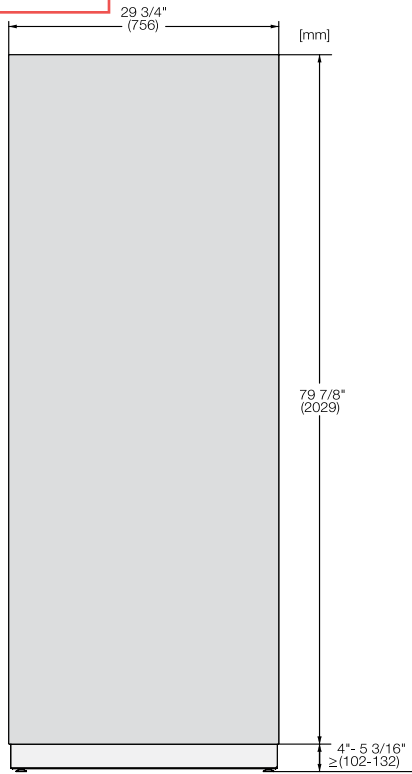

Max. Panel Weight:

F 28x2 Vi - 77 lbs

K 28x2 Vi - 106 lbs

Optional Accessory:


Clean Touch Steel Panel:

- KFP 3005

Material# 11499080

For Models:

- KF 2802 Vi
- KF 2812 Vi

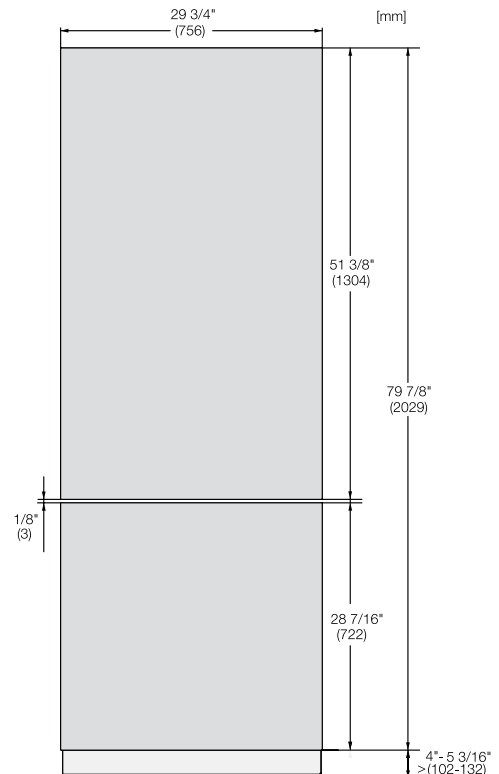

Max. Top Panel Weight: 99 lbs

Max. Bottom Panel Weight: 39 lbs

Optional Accessory:

Clean Touch Steel Panel:

- KFP 3015 - Top Panel


Material# 11499120

- KFP 3025 - Bottom Panel

Material# 11499130

Panel Notes

If the adjoining cabinets are taller than the height of machine (HOM) - the front panel may be extended accordingly. Simply maintain the toekick height and extend the panel the needed distance.

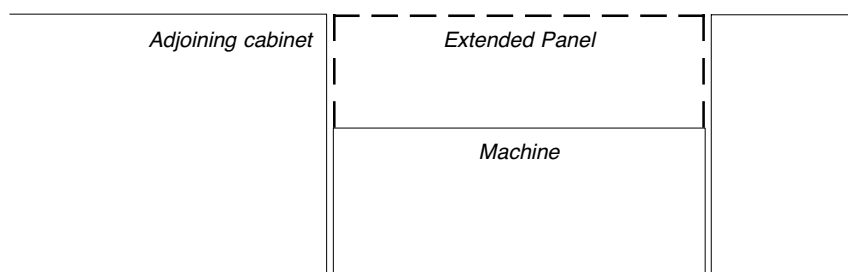


Fully Integrated 30" MasterCool

#K 2802 Vi


HINGING DETAILS 115° OPENING

Available for the following models:

- K 28x2 Vi
- F 28x2 Vi
- KF 28x2 Vi

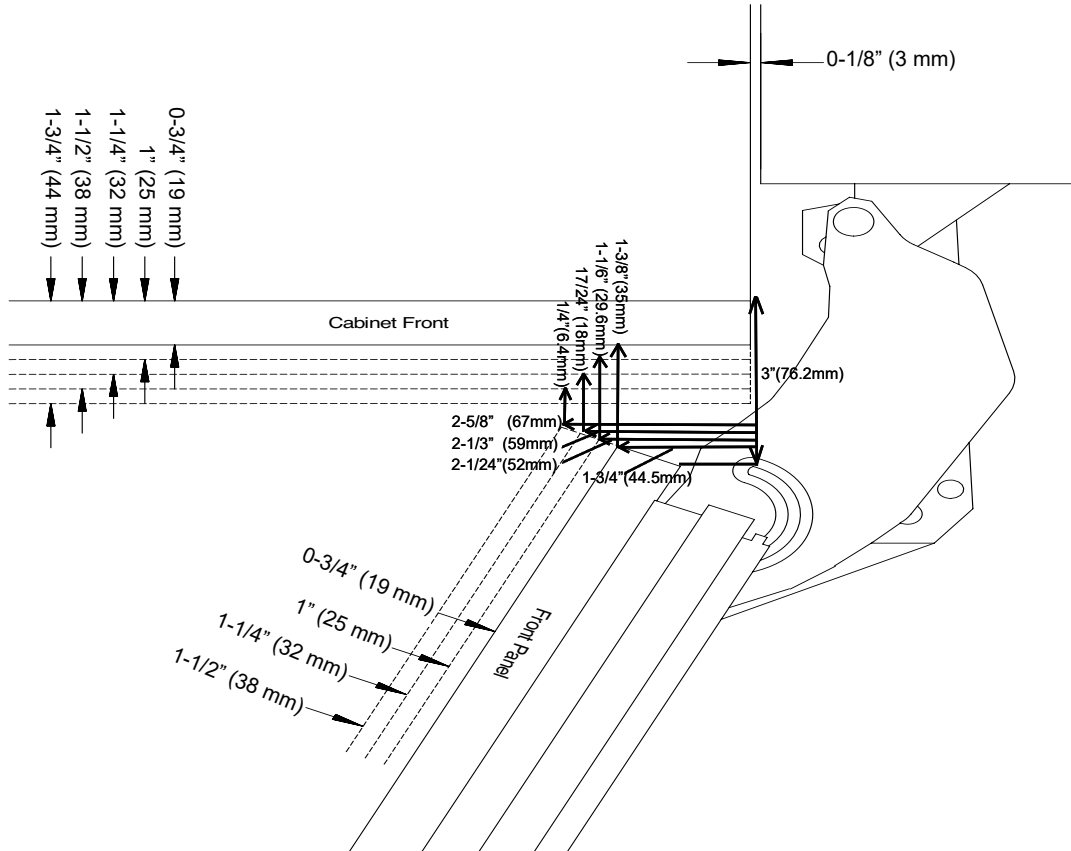

Top View)
(K29x2Vi, F29x2Vi, KF29x2Vi)

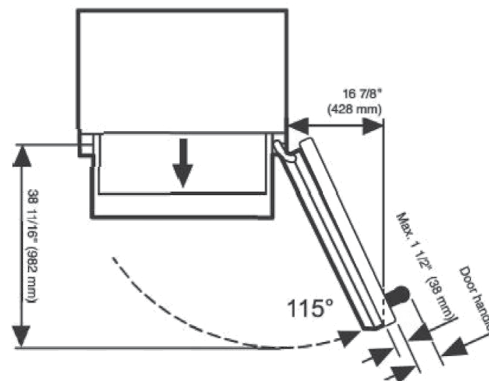



Fully Integrated 30" MasterCool

#K 2802 Vi


HINGING DETAILS 90° OPENING

Available for the following models:

- K 28x2 Vi
- KF 28x2 Vi

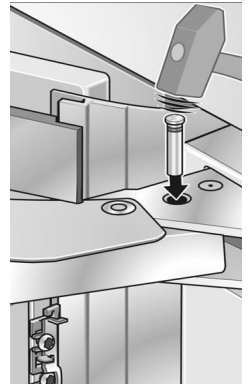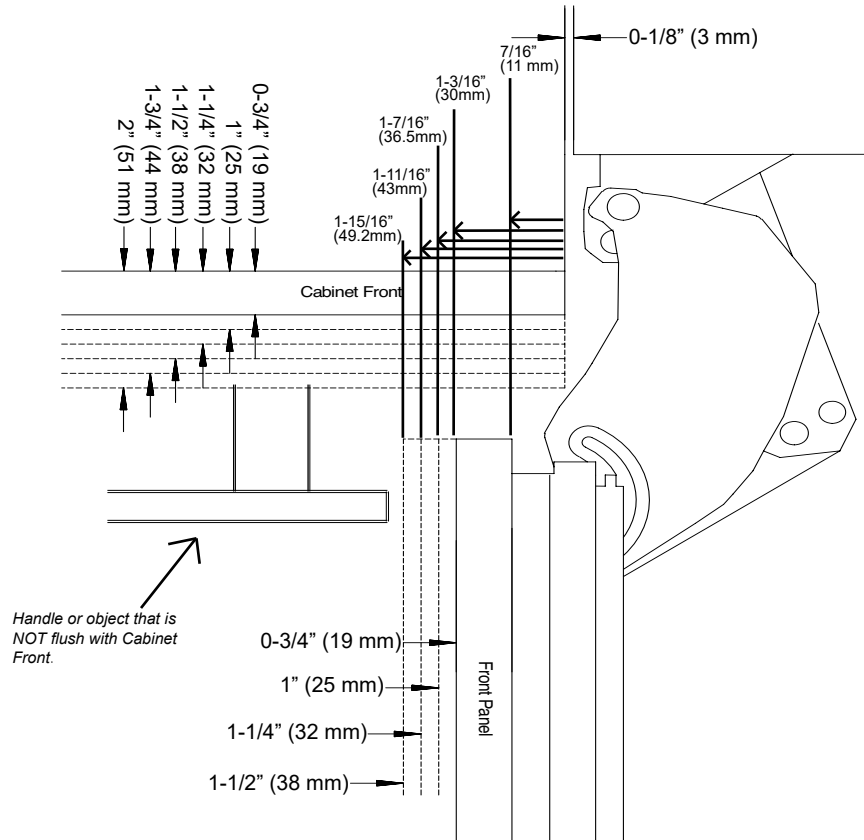

Top View)
(K29x2Vi, F29x2Vi, KF29x2Vi)

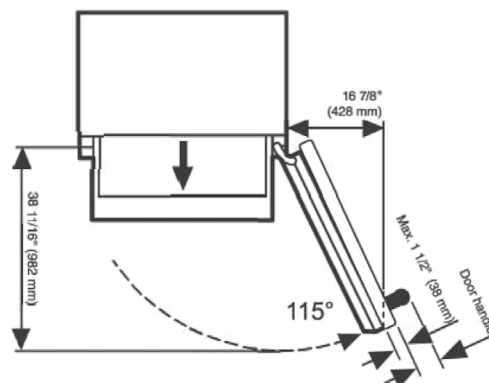

G 7156 SCVi

24" Fully Integrated Dishwasher

Features:

- DirectSelect Controls
- QuickIntenseWash - a full wash and dry cycle in 58 minutes
- 40 dBa (38 dBa when using ExtraQuiet)
- 3D MultiFlex Cutlery Tray
- Panel-Ready
- Water Softener
- EnergyStar


MATERIAL

11387590




SPECIFICATIONS	
Overall Unit Dimensions	23 ⁹ / ₁₆ " (598 mm) W x 33 ¹¹ / ₁₆ " - 36 ¹ / ₄ " (855 - 920 mm) H x 22 ⁷ / ₁₆ " (570 mm) D [Depth does not include door panel]
Niche	
Minimum Cabinet Niche Opening	23 ⁵ / ₈ " (600 mm) W x 33 ³ / ₄ " (857 mm) H x 22 ⁷ / ₁₆ " (570 mm) D
Plumbing	
Water Supply Requirements	<ul style="list-style-type: none"> • Cold or Hot (max 150°F/65°C) water connection • Male 3/8" compression fitting • Water pressure range 7.25 psi (0.5 bar) and 145 psi (10 bar)
Water Connection Line (Supplied)	Length: 5 ft (1.5 m) Female 3/8" compression.
Drain Hose (Supplied)	Length: 5 ft (1.5 m) 7/8" (22 mm) internal diameter
Electrical	
Electrical Requirements	110V / 120V, 60Hz, 15 Amps
Power Cord (Convertible to hardwire)	NEMA 5-15 plug, 5 ft (1.52 m)
Shipping	
Shipping Weight	121 lbs (55 kg)
Shipping Dimensions	27 ¹ / ₈ " W x 38 ¹ / ₈ " H x 26 ³ / ₈ " D


PRODUCT DIMENSIONS

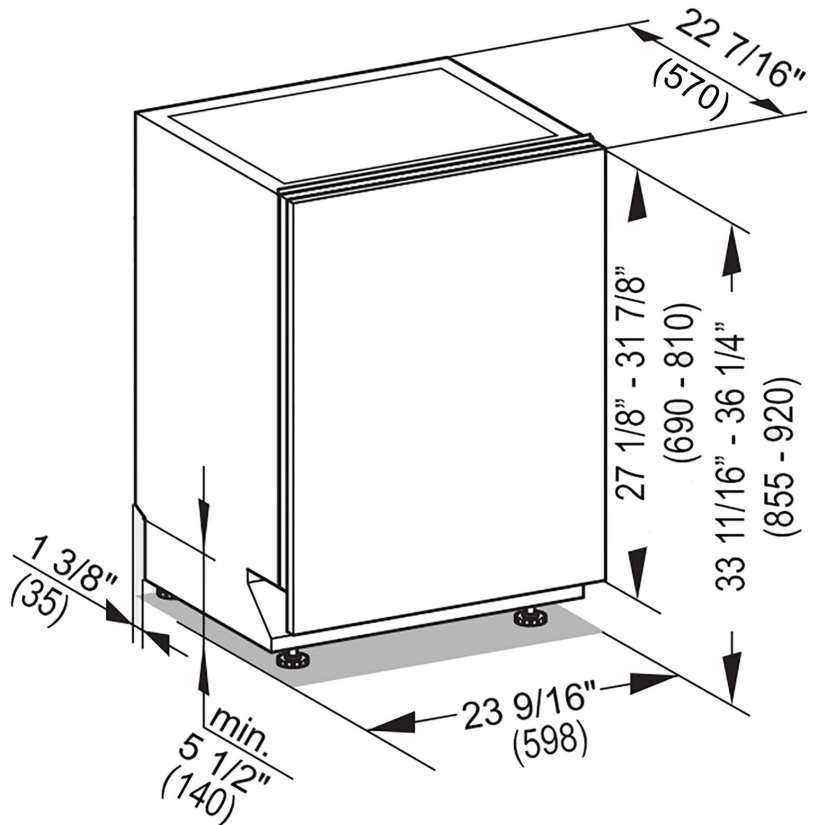

CUTOUT DIMENSIONS

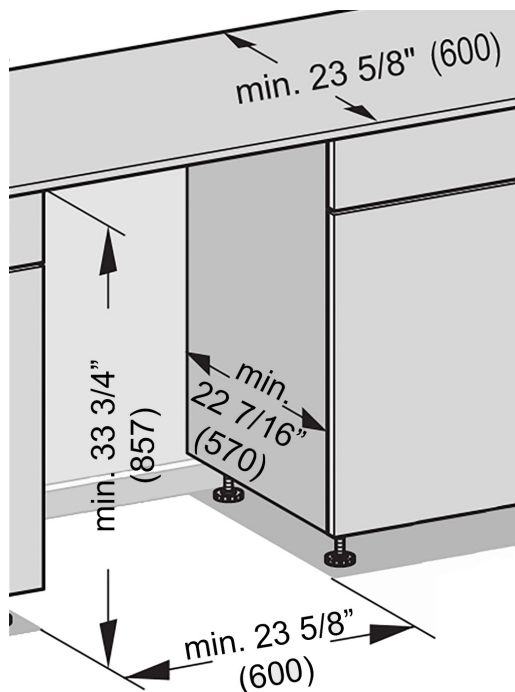

CUSTOM PANEL

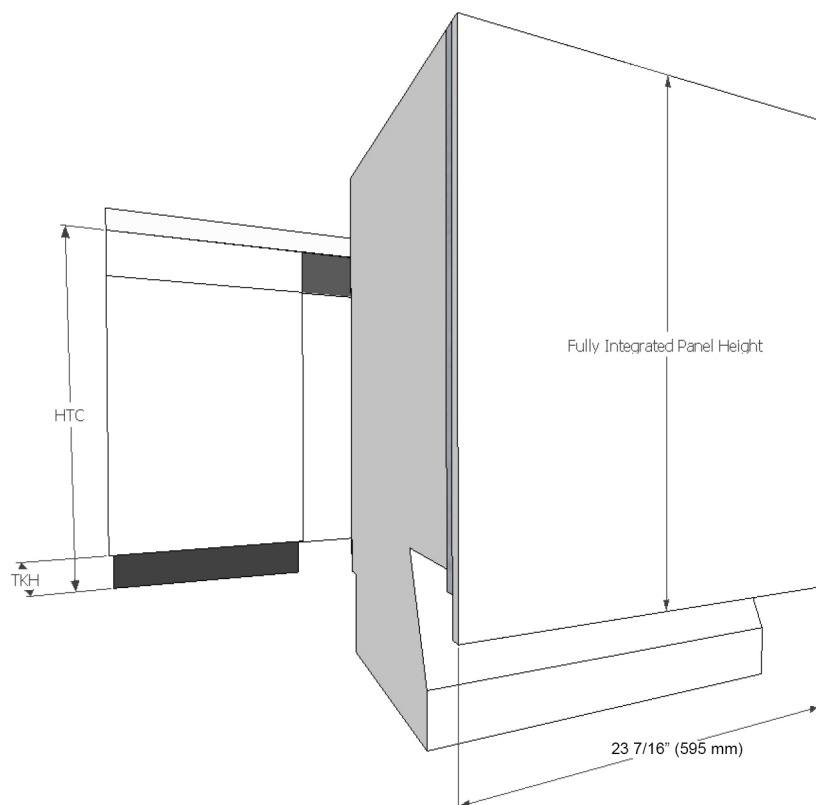

Width: 23 7/16" (595 mm) in all Cases
Thickness: 3/4" (19 mm) in all Cases
Height: Determined using the following calculation:

$$\text{Panel Height} = \text{HTC} - \text{TKH}$$

HTC = Height to the underside of countertop
TKH = Toe kick height

Note: Control panel is along the top edge of the unit. It is not visible when the unit is closed. A handle **MUST** be located on front of panel in order to open unit. (Except K2o models).

Maximum panel height: 31 7/8" (810 mm)

Minimum panel height: 27 1/8" (690 mm)

Maximum panel weight: 22 lbs (10 kg)

KWU120-45

45 Inch Undermount Workstation Single Bowl Stainless Steel Kitchen Sink

Sink Dimensions

Overall Dimensions: 45" x 19"

Bowl Dimensions: 43" x 16"

Sink Depth: 10"

Features

- 16 Gauge Stainless Steel Construction
- Single Bowl Undermount Sink
- Required Minimum Cabinet Size: 48" Left to Right, 24" Front to Back
- Rear Off-Set Drain
- 3 1/2" Drain Opening
- NoiseDefend Undercoating and Sound Dampening Pads


Accessories Included

- Strainer ST-1
- Cover Cap STC-2
- Bottom Grid KBG-UN1-23
- Bottom Grid KBG-WSU1-45
- Rolling Mat KRM-11BL
- Cutting Board KCB-WS104BB
- Cutting Board, Colander and Bowl Set KAC-1005BB
- Dish Rack: KDR-1
- Cut-Out Template
- Mounting Hardware

CODES/STANDARDS:

Product Certification

cUPC (ASME A112.19.3/CSA B45.4)

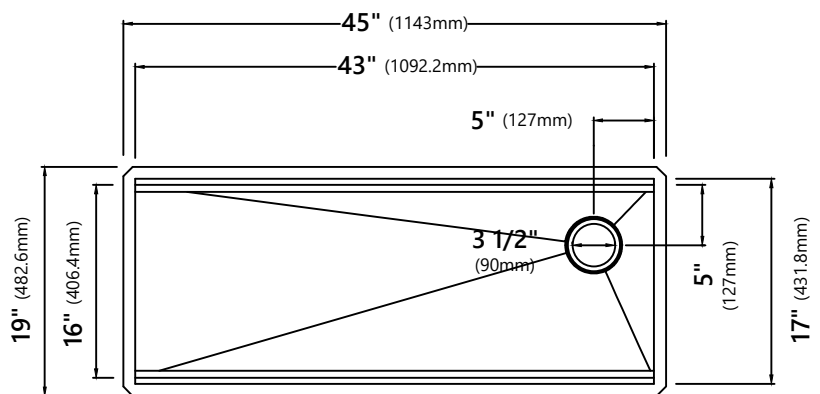

NOTE: It is not recommended to install this sink with a negative reveal. Doing so will prohibit the use of any workstation accessories as they will not fit.

Warranty

Kraus Limited Lifetime Warranty

see website for details www.kraususa.com

KWU111-17

17 Inch Undermount Workstation Single Bowl Stainless Steel Kitchen Sink

Sink Dimensions

Overall Dimensions: 17" x 19"

Bowl Dimensions: 15" x 16"

Sink Depth: 10"

Features

- 16 Gauge Stainless Steel Construction
- Undermount Installation
- Single Bowl Sink
- Required Minimum Cabinet Size: 21" Left to Right, 24" Front to Back
- Rear Off-Set Drain
- 3 1/2" Drain Opening
- NoiseDefend Undercoating and Sound Dampening Pads



Accessories Included

- Strainer ST-1
- Cover Cap STC-2
- Bottom Grid KBG-WSU1-17
- Cutting board KCB-WS03BB
- Cut-Out Template
- Mounting Hardware

CODES/STANDARDS:

Product Certification

cUPC (ASME A112.19.3/CSA B45.4)

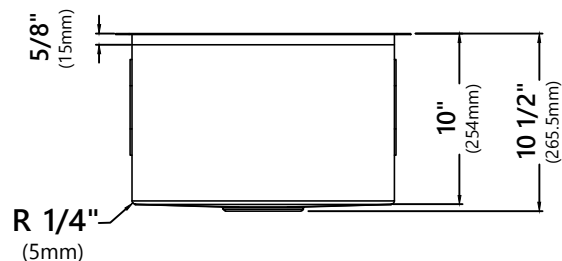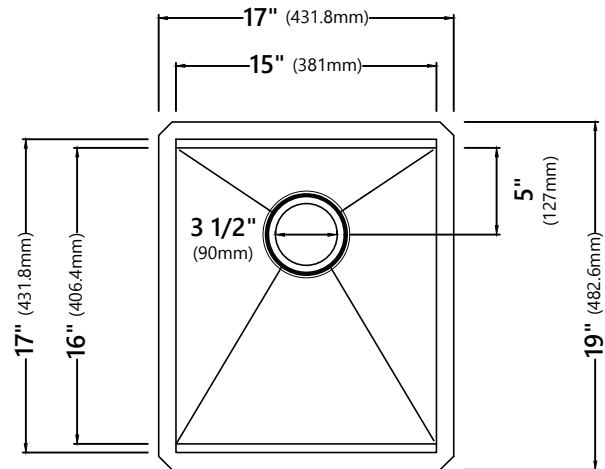

Warranty

Kraus Limited Lifetime Warranty

see website for details www.kraususa.com