
# MEDMCW31WS 30-INCH TRIPLE COMBINATION BUILT-IN OVEN WITH SPEED OVEN MASTERPIECE® SERIES



### 30-INCH TRIPLE COMBINATION OVEN WITH SPEED OVEN AND WARMING DRAWER

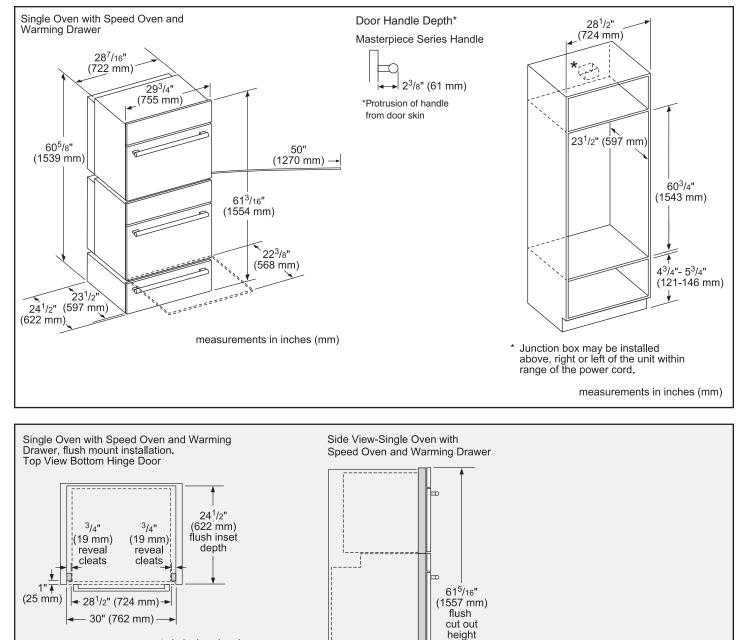

measurements in inches (mm)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

\_\_\_\_\_

\_\_ 24<sup>1</sup>/2" \_\_ (622 mm)


measurements in inches (mm)

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | @2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.



## 36-INCH COOKTOP AND CUTOUT DIMENSIONS

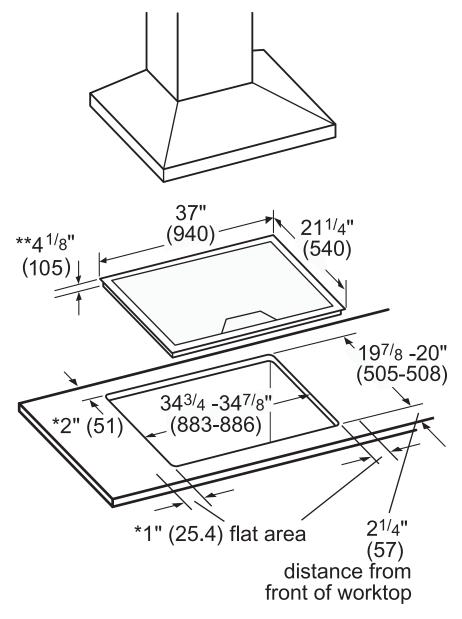

\* Minimum distance from cutout to the wall \*\* Recessed depth (includes 1" air clearance)

Measurements in inches (mm in brackets)

**NOTE:** The work surface should be horizontal and level. The stability of the countertop should be confirmed even after making the cutout.



-----

## INSTALLATION ABOVE A THERMADOR WALL OVEN



When installing an oven or oven with a drawer in combination with a cooktop, a minimum distance between the cabinet floor and countertop (B) is required. Reference the table for dimensions. Refer to the oven installation guide for all other measurements.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.




## HVI PERFORMANCE VALUES (CFM & SONES)

DOWNDRAFT UCVM36XS WITH BLOWER VTD600P					
Exhaust	Duct Size	Required Accessories	Speed	CFM	Sones
Front	8" Round	None	High	450	11.0
			Working	180	1.2
Left	8" Round	Optional Adapter Model: CVTSIDE8	High	410	9.0
			Working	160	0.9
Right	8" Round	Optional Adapter Model: CVTSIDE8	High	400	11.0
			Working	160	1.1
Rear	8" Round	Optional Adapter Model: CVTSIDE8	High	400	9.5
			Working	160	1.0
Bottom	8" Round	Optional Adapter Model: CVTSIDE8	High	420	8.5
			Working	170	0.9

Note: High speed CFM tested at 0.1" w.g. of static pressure

#### HOOD DIMENSIONS

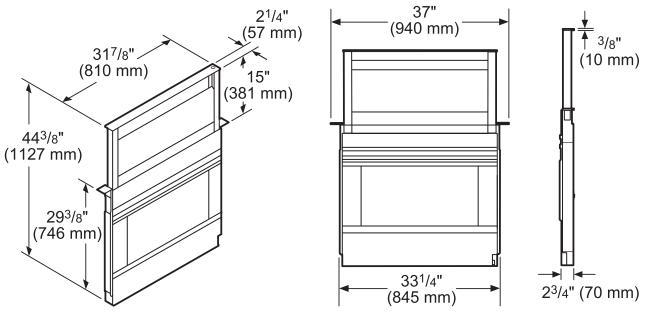


measurements in inches (mm)


# UCVM36XS 37-INCH DOWNDRAFT VENTILATION MASTERPIECE® SERIES



## CUTOUT AND CLEARANCE DIMENSIONS

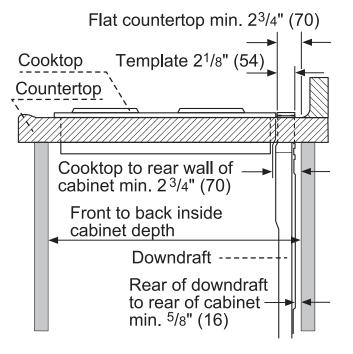

measurements in inches and (mm)

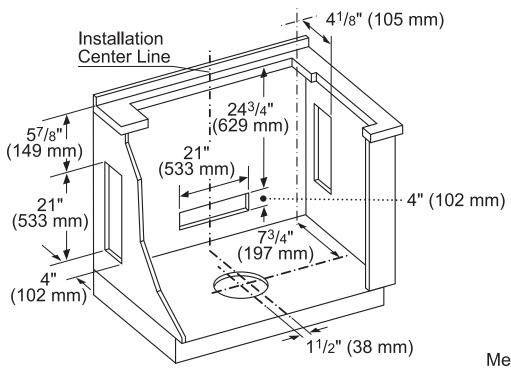


Measurements in inches (mm)

# UCVM36XS 37-INCH DOWNDRAFT VENTILATION MASTERPIECE® SERIES




## ELECTRIC OR INDUCTION COOKTOP CUTOUT AND CLEARANCE DIMENSIONS

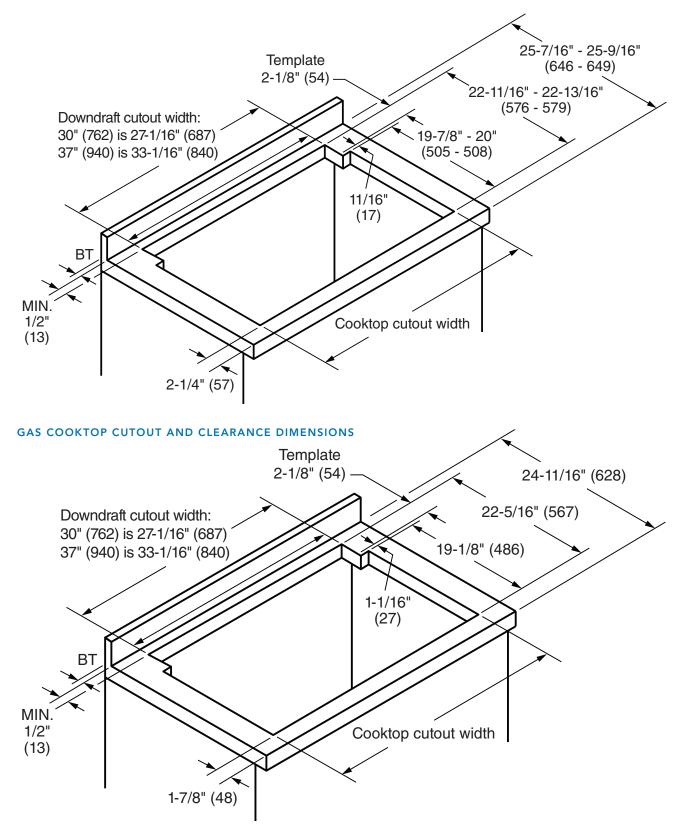


# UCVM36XS **37-INCH DOWNDRAFT VENTILATION MASTERPIECE® SERIES**



# FLEXIBLE BLOWER INSTALLATION - REAR OR DOWNWARD EXHAUST EXAMPLE



Rear Exhaust



Downward Exhaust


- Rear or downward exhaust options to preserve precious kitchen storage space or if ducting is more convenient for these configurations\*
- Requires at least 18" of clearance to fit the blower and transition
- Blower must be accessible for maintenance
- Elbow and ductwork are not included

/TD600P - 600 CFM


or inline blower

600 CFM flexible blower can

be installed as an integrated



measurements in inches (mm)




#### **CVTSIDE8**

8" round transition allows for rear or downward venting. Use with VTD600P blower as an inline installation, and ducting with 8" round duct connections.

For only front downward ducting applications, electrical panel must be remotely mounted. Electrical panel can still be remotely mounted in other exhaust configurations if desired. Optional 5' extension cable EXTNCE5 accessory is available to connect remotely placed electrical panel to downdraft. Refer to installation manual.

NOTE: Some applications may require deeper cabinets. Side and rear exhaust require at least 18" of clearance to t the blower and/or ductwork. Refer to installation manual.



EXTNCE5



### **RECIRCULATION KIT** UCVRECIRC

Includes 1 charcoal filter and 1 metal grill vent plate (blower sold separately). Use with induction/electric cooktops only.

Measurements in inches and (mm)



# **REPLACEMENT CHARCOAL FILTER** UCVFILTER

Includes 1 replacement charcoal filter for UCVRECIRC recirculation kit



## DOWNDRAFT GAS COOKTOP SEAL TRIM KIT UCV36ST

Includes trim, seal, metal grill, and fasteners. Required for installations with 36" gas cooktops.

This cable extends 5 ft. to move the electrical panel out of the way to offer full installation flexibility in any ducting scenario while installing the downdraft. Ability to connect two cables together to make a 10 ft. cable.






FREEDOM® COLLECTION, PANEL-READY

## WARRANTY

Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

\*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

## **CUTOUT DIMENSIONS**




Furniture return

A: Area for installation of power connection.


B: Area for running the water line. It is recommended that the waterbox is placed adjacent to the installation cavity, so that it can be accessed for service without uninstalling the appliance. If this is not possible, place the recessed waterbox adjacent to the water supply socket elevated at the heights as referenced in areas A and B.

C: Niche depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel.

Stainless steel models contain a panel-ready base unit, ready-to-install stainless steel door(s) with a right or left door swing and handle(s).



### **TOP VIEW CLEARANCE**

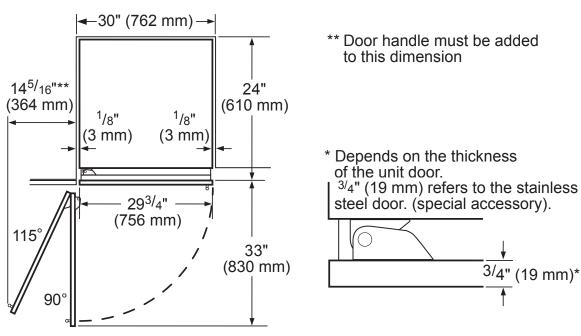


# T30IF905SP **30-INCH BUILT-IN FREEZER COLUMN WITH** INTERNAL ICE MAKER



FREEDOM® COLLECTION, PANEL-READY

### **PRODUCT AND PANEL DIMENSIONS**

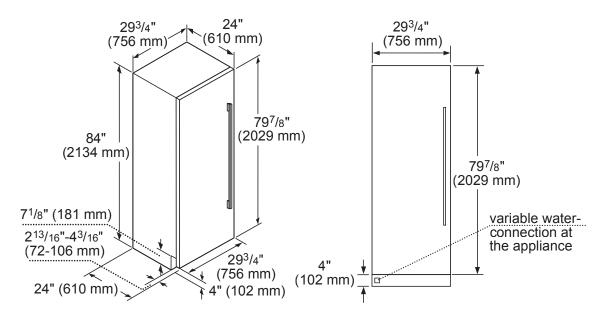

## ACCESSORIES (OPTIONAL)

**STORAGE** 

FRAMEKIT10

Freedom<sup>®</sup> Frame Kit

unfinished cabinet returns.

# FLAT STAINLESS STEEL DOOR PANELS

30-Inch Flat Stainless Steel Door Panel Without Dispenser

**TFL30IR800** For use with Handle

**TFL30IR905** 

Handleless

ICEBUCKETL

Large Ice Bucket

For any custom column installation in 24-inch

deep cutouts. With two metal side trims whose

placement between the interior cutout wall and

the appliance helps overcome the challenge of

# HANDLES

Choose between two options:

### PR36HNDL20

36-Inch Professional Series Handle

or


# MS36HNDL20

36-Inch Masterpiece® Series Handle

### FILTERS

#### REPLFLTR55

Freedom<sup>®</sup> Water Filter Replacement water filter for use in all freezer and bottom freezer models



### HEATRKIT20 - 13W @ 120V

Freedom<sup>®</sup> Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this sealing kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada Thermador is not responsible for products that are transported from the U.S. for use in Canada

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2021 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.



2 Year

3rd to 6th Year

7th to 12th Year Lifetime


WARRANTY
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect
Limited Warranty for Sealed Refrigeration System*; Parts and Labor

Limited Warranty for Sealed Refrigeration System\*; Parts Only


Limited Warranty for Stainless Steel Rust-Through

\*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

### **CUTOUT DIMENSIONS**

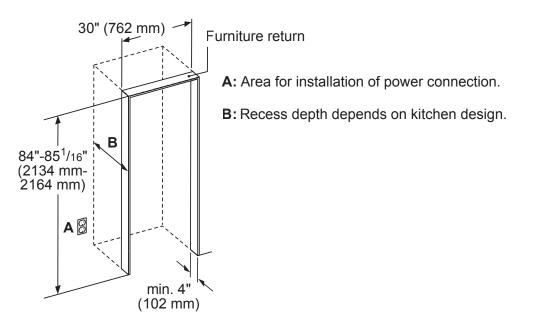

#### TOP VIEW CLEARANCE

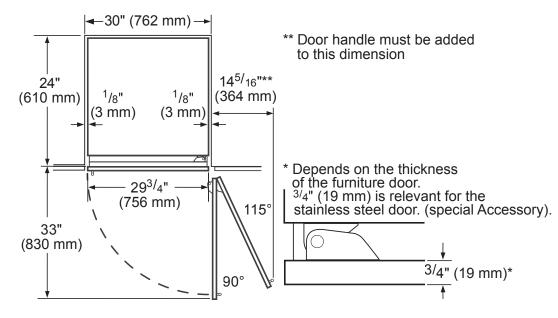


# T30IR905SP 30-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY



#### **PRODUCT AND PANEL DIMENSIONS**

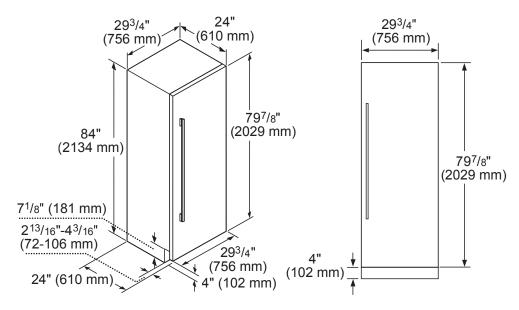

### ACCESSORIES (OPTIONAL)

#### FLAT STAINLESS STEEL DOOR PANELS

30-Inch Flat Stainless Steel Door Panel



TFL30IR800 For use with Handle TFL30IR905 Handleless

#### HANDLES

Choose between two options:

# PR36HNDL20

36-Inch Professional Series Handle

or

MS36HNDL20

36-Inch Masterpiece® Series Handle

I.	11	1.1
		!

**STORAGE** 




LPRODBIN10





### FRAMEKIT10

Freedom® Frame Kit For any custom column installation in 24-inch deep cutouts. With two metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns.



#### HEATRKIT20 - 13W @ 120V

Freedom<sup>®</sup> Heater Kit When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this sealing kit is included. For all other (nontraditional, i.e. two wine columns, two bottom freezers, etc.) sideby-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2021 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

# DWHD770WPR **SAPPHIRE® 7-PROGRAM DISHWASHER CUSTOM PANEL**




# x2 in the island.

14//			
VV A	١RR	AIN	I I Y

WARRANTY			
Limited Warranty, Entire Appliance, Parts and Labor	2 Year		
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only 3rd			
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year		
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime		

### **DISHWASHER & CUTOUT DIMENSIONS**

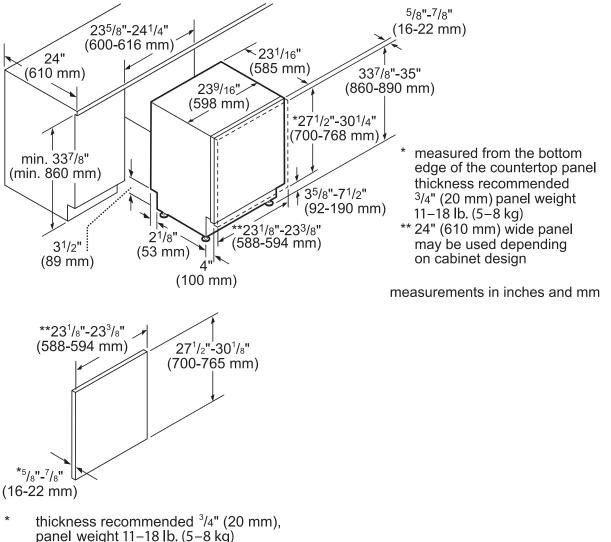

24" (610 mm) wide panel may be used depending on cabinet design

### measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada Thermador is not responsible for products that are transported from the U.S. for use in Canada

# WINE COOLER

#### DUAL ZONE



MODEL Dual Zone Wine Cooler	PRW24C02BG	
Size	24"	<u> </u>
Dimensions	24 23-7/8"W x 33-7/8"H x 23-5/8"D	606
Weight	128lbs.	
Installation Type	Compact / Built-in / Freestanding	
Refrigerant Type	Ró00a	Top View
FEATURES		
Capacity	45 bottles (750 ml)	Mail
Volume	5.2 cu/ft	
Temperature Range	40° - 65° F (both zones)	
Sound Level	39 dBA	
Door Finish	304-grade Stainless + Glass	
Cabinet Finish	Black	
Interior Finish	Black	
Field-Reversible Door	Yes	
Zero-Clearance Door Hinge	Yes	
Door Glass	Dual-pane, Low-e Argon-filled	
Shelving	5 full-extension, black wood	
-	racks w/ stainless trim	
Controls	Electronic Capacitive Touch	648
Lighting	3-Color LED	<u>25-1/2"</u>
	Cloud White, Deep Blue, Amber	600_23-5/8" 21-7/8"
Door Open Alarm	Yes, after 3 minutes	<u>- 21-7/8</u>
Sabbath Mode	Yes	
Air Filtration	Yes, w/ carbon filter	
PreciseTemp™	Yes	860-876
Active Cooling Technology	Yes	
Vibration Dampening System	Yes	- 50 - 50 - 50 - 50 - 50 - 50 - 50 - 50
AC POWER	115V, 60Hz at Max. 1.0A	
OPTIONAL ACCESSORIES		
Contemporary Handle Kit	PRHAN-C102 (Brushed Gold)	
Contemporary Handle Kit	PRHAN-C104 (Matte Black)	
Pro Handle Kit	PRHAN-C001 (Stainless Steel)	
WARRANTY	2 years parts, 5 years compressor 1 year labor	
		- 8 Bottles (max. Ø 3-3/

#### DID YOU KNOW?

The designated 7 bottle capacity rack easily stores large diameter bottles such as Pinot Noir, Chardonnay, and Champagne.

#### Transforming the Kitchen through Design, Discovery, and Care

Specifications subject to change, check zephyronline.com for up-to-date information. Zephyr | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.8368 MAY21.0101

- 8 Bottles (max. Ø 3-3/8")

- 7 Bottles (max. Ø 3-1/2")

8 Bottles (max. Ø 3-3/8")

- 8 Bottles (max. Ø 3-3/8")

6 Bottles (max. Ø 3-1/2")

 $(\mathbf{A}, \mathbf{A}, \mathbf{A}, \mathbf{A}, \mathbf{A})$ 

٠

Υ.